

#### the high-performance embedded kernel

# User Guide Version 5

**Express Logic** 

858.613.6640 Toll Free 888.THREADX FAX 858.521.4259

http://www.expresslogic.com

#### ©1997-2019 by Express Logic

All rights reserved. This document and the associated ThreadX software are the sole property of Express Logic. Each contains proprietary information of Express Logic. Reproduction or duplication by any means of any portion of this document without the prior written consent of Express Logic is expressly forbidden.

Express Logic reserves the right to make changes to the specifications described herein at any time and without notice in order to improve design or reliability of ThreadX. The information in this document has been carefully checked for accuracy; however, Express Logic makes no warranty pertaining to the correctness of this document.

#### **Trademarks**

ThreadX is a registered trademark of Express Logic, and *picokernel*, *preemption-threshold*, and *event-chaining* are trademarks of Express Logic.

All other product and company names are trademarks or registered trademarks of their respective holders.

#### **Warranty Limitations**

Express Logic makes no warranty of any kind that the ThreadX products will meet the USER's requirements, or will operate in the manner specified by the USER, or that the operation of the ThreadX products will operate uninterrupted or error free, or that any defects that may exist in the ThreadX products will be corrected after the warranty period. Express Logic makes no warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose, with respect to the ThreadX products. No oral or written information or advice given by Express Logic, its dealers, distributors, agents, or employees shall create any other warranty or in any way increase the scope of this warranty, and licensee may not rely on any such information or advice.

#### Safety Certifications



IEC 61508 up to SIL 4
IEC 62304 up to SW safety Class C
ISO 26262 ASIL D
EN 50128 SW-SIL 4



UL/IEC 60730, UL/IEC 60335, UL 1998

MISRA-C:2004 Compliant MISRA C:2012 Compliant

Part Number: 000-1001

Revision 5.9

## **Contents**

#### About This Guide 9

- Organization 9
- Guide Conventions 10
- ThreadX Data Types 11
- Customer Support Center 12

#### 1 Introduction to ThreadX 15

- ThreadX Unique Features 16
- Safety Certifications 18
- Embedded Applications 20
- ThreadX Benefits 22

#### 2 Installation and Use of ThreadX 27

- Host Considerations 28
- Target Considerations 28
- Product Distribution 29
- ThreadX Installation 30
- Using ThreadX 31
- Small Example System 31
- Troubleshooting 33
- Configuration Options 33
- ThreadX Version ID 40



4 ThreadX

#### 3 Functional Components of ThreadX 41

- Execution Overview 44
- Memory Usage 46
- Initialization 48
- Thread Execution 50
- Message Queues 67
- Counting Semaphores 72
- Mutexes 78
- Event Flags 82
- → Memory Block Pools 85
- Memory Byte Pools 89
- Application Timers 93
- Relative Time 96
- Interrupts 96

#### 4 Description of ThreadX Services 101

#### 5 Device Drivers for ThreadX 289

- Device Driver Introduction 290.
- Driver Functions 290
- Simple Driver Example 292
- Advanced Driver Issues 297

#### 6 Demonstration System for ThreadX 305

- Overview 306
- Application Define 306
- Thread 0 308
- Thread 1 308
- Thread 2 308

Contents 5

- Threads 3 and 4 309
- Thread 5 309
- Threads 6 and 7 310
- Observing the Demonstration 310
- Distribution file: demo\_threadx.c 311

#### **Appendices**

A ThreadX API Services 317

B ThreadX Constants 323

C ThreadX Data Types 329

**D ASCII Character Codes 337** 

Index 339

6 ThreadX

# T H R E A D

# **Figures**

Figure 1	Template for Application Development 32
Figure 2	Types of Program Execution 45
Figure 3	Memory Area Example 47
Figure 4	Initialization Process 51
Figure 5	Thread State Transition 52
Figure 6	Typical Thread Stack 60
Figure 7	Stack Preset to 0xEFEF 61
Figure 8	Example of Suspended Threads 77
Figure 9	Simple Driver Initialization 294
Figure 10	Simple Driver Input 295
Figure 11	Simple Driver Output 296
Figure 12	Logic for Circular Input Buffer 299
Figure 13	Logic for Circular Output Buffer 300
Figure 14	I/O Buffer 300
Figure 15	Input-Output Lists 302

8 ThreadX

# T H R E A D

### **About This Guide**

This guide provides comprehensive information about ThreadX, the high-performance real-time kernel from Express Logic.

It is intended for the embedded real-time software developer. The developer should be familiar with standard real-time operating system functions and the C programming language.

#### Organization

Chapter 1	Provides a basic overview of ThreadX and its relationship to real-time embedded development.
Chapter 2	Gives the basic steps to install and use ThreadX in your application right <i>out of the box</i> .
Chapter 3	Describes in detail the functional operation of ThreadX, the high-performance real-time kernel.
Chapter 4	Details the application's interface to ThreadX.
Chapter 5	Describes writing I/O drivers for ThreadX applications.
Chapter 6	Describes the demonstration application that is supplied with every ThreadX processor

support package.



Appendix A ThreadX API

Appendix B ThreadX constants

Appendix C ThreadX data types

Appendix D ASCII chart

**Index** Topic cross reference

#### **Guide Conventions**

Italics typeface denotes book titles,

emphasizes important words,

and indicates variables.

**Boldface** typeface denotes file names,

key words, and further

emphasizes important words

and variables.

Information symbols draw attention to important or additional information that could

affect performance or function.

Warning symbols draw attention to situations in which developers should take care to avoid

because they could cause fatal

errors.

#### **ThreadX Data Types**

In addition to the custom ThreadX control structure data types, there are a series of special data types that are used in ThreadX service call interfaces. These special data types map directly to data types of the underlying C compiler. This is done to insure portability between different C compilers. The exact implementation can be found in the *tx\_port.h* file included on the distribution disk.

The following is a list of ThreadX service call data types and their associated meanings:

**UINT** Basic unsigned integer. This

type must support 8-bit unsigned data; however, it is mapped to the most convenient unsigned

data type.

**ULONG** Unsigned long type. This type

must support 32-bit unsigned

data.

**VOID** Almost always equivalent to the

compiler's void type.

CHAR Most often a standard 8-bit

character type.

Additional data types are used within the ThreadX source. They are also located in the *tx port.h* file.

#### **Customer Support Center**

Support engineers	858.613.6640
Support fax	858.521.4259
Support email	support@expresslogic.com
Web page	http://www.expresslogic.com

## Latest Product Information

Visit the Express Logic web site and select the "Support" menu option to find the latest online support information, including information about the latest ThreadX product releases.

## What We Need From You

Please supply us with the following information in an email message so we can more efficiently resolve your support request:

- A detailed description of the problem, including frequency of occurrence and whether it can be reliably reproduced.
- A detailed description of any changes to the application and/or ThreadX that preceded the problem.
- The contents of the \_tx\_version\_id string found in the tx\_port.h file of your distribution. This string will provide us valuable information regarding your run-time environment.
- 4. The contents in RAM of the \_tx\_build\_options
  ULONG variable. This variable will give us
  information on how your ThreadX library was built.

#### Where to Send Comments About This Guide

The staff at Express Logic is always striving to provide you with better products. To help us achieve this goal, email any comments and suggestions to the Customer Support Center at

support@expresslogic.com

Enter "ThreadX User Guide" in the subject line.

## T H R E A D X

#### Introduction to ThreadX

ThreadX is a high-performance real-time kernel designed specifically for embedded applications. This chapter contains an introduction to the product and a description of its applications and benefits.

- ThreadX Unique Features 16 picokernel™ Architecture 16 ANSI C Source Code 16 Advanced Technology 16 Not A Black Box 17 The RTOS Standard 18
- Safety Certifications 18
   TÜV Certification 18
   MISRA C Compliant 19
   UL Certification 19
   Certification Pack 20
- Embedded Applications 20
   Real-time Software 20
   Multitasking 21
   Tasks vs. Threads 21
- ThreadX Benefits 22
  Improved Responsiveness 22
  Software Maintenance 23
  Increased Throughput 23
  Processor Isolation 24
  Dividing the Application 24
  Ease of Use 24
  Improve
  Time-to-market 24
  Protecting the Software Investment 25

#### ThreadX Unique Features

Unlike other real-time kernels, ThreadX is designed to be versatile—easily scaling among small microcontroller-based applications through those that use powerful CISC, RISC, and DSP processors.

ThreadX is scalable based on its underlying architecture. Because ThreadX services are implemented as a C library, only those services actually used by the application are brought into the run-time image. Hence, the actual size of ThreadX is completely determined by the application. For most applications, the instruction image of ThreadX ranges between 2 KBytes and 15 KBytes in size.

#### *picokernel*™ Architecture

Instead of layering kernel functions on top of each other like traditional *microkernel* architectures, ThreadX services plug directly into its core. This results in the fastest possible context switching and service call performance. We call this non-layering design a *picokernel* architecture.

#### ANSI C Source Code

ThreadX is written primarily in ANSI C. A small amount of assembly language is needed to tailor the kernel to the underlying target processor. This design makes it possible to port ThreadX to a new processor family in a very short time—usually within weeks!

## Advanced Technology

The following are highlights of the ThreadX advanced technology:

- Simple picokernel architecture
- Automatic scaling (small footprint)
- Deterministic processing
- Fast real-time performance

- Preemptive and cooperative scheduling
- Flexible thread priority support (32-1024)
- Dynamic system object creation
- Unlimited number of system objects
- Optimized interrupt handling
- Preemption-threshold™
- · Priority inheritance
- Event-chaining™
- · Fast software timers
- Run-time memory management
- Run-time performance monitoring
- · Run-time stack analysis
- · Built-in system trace
- Vast processor support
- Vast development tool support
- · Completely endian neutral

#### Not A Black Box

Most distributions of ThreadX include the complete C source code as well as the processor-specific assembly language. This eliminates the "black-box" problems that occur with many commercial kernels. With ThreadX, application developers can see exactly what the kernel is doing—there are no mysteries!

The source code also allows for application specific modifications. Although not recommended, it is certainly beneficial to have the ability to modify the kernel if it is absolutely required.

These features are especially comforting to developers accustomed to working with their own *inhouse kernels*. They expect to have source code and the ability to modify the kernel. ThreadX is the ultimate kernel for such developers.



Because of its versatility, high-performance *picokernel* architecture, advanced technology, and demonstrated portability, ThreadX is deployed in more than two-billion devices today. This effectively makes ThreadX the RTOS standard for deeply embedded applications.

#### **Safety Certifications**

#### **TÜV Certification**

ThreadX has been certified by SGS-TÜV Saar for use in safety-critical systems, according to IEC-61508 and IEC-62304. The certification confirms that ThreadX can be used in the development of safetyrelated software for the highest safety integrity levels of the International Electrotechnical Commission (IEC) 61508 and IEC 62304, for the "Functional Safety of electrical, electronic, and programmable electronic safety-related systems." SGS-TÜV Saar, formed through a joint venture of Germany's SGS-Group and TÜV Saarland, has become the leading accredited, independent company for testing, auditing, verifying, and certifying embedded software for safety-related systems worldwide. The industrial safety standard IEC 61508, and all standards that are derived from it, including IEC 62304, are used to assure the functional safety of electrical, electronic, and programmable electronic safety-related medical devices, process control systems, industrial machinery, and railway control systems.

SGS-TÜV Saar has certified ThreadX to be used in safety-critical automotive systems, according to the ISO 26262 standard. Furthermore, ThreadX is certified to Automotive Safety Integrity Level (ASIL) D, which represents the highest level of ISO 26262 certification.

In addition, SGS-TÜV Saar has certified ThreadX to be used in safety-critical railway applications, meeting to the EN 50128 standard up to SW-SIL 4.



IEC 61508 up to SIL 4
IEC 62304 up to SW safety Class C
ISO 26262 ASIL D
EN 50128 SW-SIL 4



Please contact sales@expresslogic.com for more information on which version(s) of ThreadX have been certified by TÜV or for the availability of test reports, certificates, and associated documentation.

#### MISRA C Compliant

MISRA C is a set of programming guidelines for critical systems using the C programming language. The original MISRA C guidelines were primarily targeted toward automotive applications; however, MISRA C is now widely recognized as being applicable to any safety critical application. ThreadX is compliant with all "required" and "mandatory" rules of MISRA-C:2004 and MISRA C:2012. ThreadX is also compliant with all but three "advisory" rules. Refer to the *ThreadX\_MISRA\_Compliance.pdf* document for more details.

#### UL Certification

ThreadX has been certified by UL for compliance with UL 60730-1 Annex H, CSA E60730-1 Annex H, IEC 60730-1 Annex H, UL 60335-1 Annex R, IEC 60335-1 Annex R, and UL 1998 safety standards for software in programmable components. Along with IEC/UL 60730-1, which has requirements for "Controls Using Software" in its Annex H, the IEC 60335-1 standard describes the requirements for "Programmable Electronic Circuits" in its Annex R. IEC 60730 Annex H and IEC 60335-1 Annex R address the safety of MCU hardware and software



used in appliances such as washing machines, dishwashers, dryers, refrigerators, freezers, and ovens.

UL/IEC 60730, UL/IEC 60335, UL 1998



Please contact sales@expresslogic.com for more information on which version(s) of ThreadX have been certified by TÜV or for the availability of test reports, certificates, and associated documentation.

#### **Certification Pack**

The ThreadX Certification Pack™ is a 100% complete, turnkey, industry-specific, stand-alone package that provides all of the ThreadX evidence needed to certify or successfully submit the ThreadX-based product to the highest reliability and criticality levels required for safety-critical Aviation, Medical, and Industrial systems. Certifications supported include DO-178B, ED-12B, DO-278, FDA510(k), IEC-62304, IEC-60601, ISO-14971, UL-1998, IEC-61508, CENELEC EN50128, BS50128, and 49CFR236. Please contact sales@expresslogic.com for more information on Certification Pack.

#### **Embedded Applications**

Embedded applications execute on microprocessors buried within products such as wireless communication devices, automobile engines, laser printers, medical devices, etc. Another distinction of embedded applications is that their software and hardware have a dedicated purpose.

#### **Real-time Software**

When time constraints are imposed on the application software, it is called the *real-time* software. Basically, software that must perform its processing within an exact period of time is called



real-time software. Embedded applications are almost always real-time because of their inherent interaction with external events.

#### Multitasking

As mentioned, embedded applications have a dedicated purpose. To fulfill this purpose, the software must perform a variety of *tasks*. A task is a semi-independent portion of the application that carries out a specific duty. It is also the case that some tasks are more important than others. One of the major difficulties in an embedded application is the allocation of the processor between the various application tasks. This allocation of processing between competing tasks is the primary purpose of ThreadX.

#### Tasks vs. Threads

Another distinction about tasks must be made. The term task is used in a variety of ways. It sometimes means a separately loadable program. In other instances, it may refer to an internal program segment.

In contemporary operating system discussion, there are two terms that more or less replace the use of task: *process* and *thread*. A *process* is a completely independent program that has its own address space, while a *thread* is a semi-independent program segment that executes within a process. Threads share the same process address space. The overhead associated with thread management is minimal.

Most embedded applications cannot afford the overhead (both memory and performance) associated with a full-blown process-oriented operating system. In addition, smaller microprocessors don't have the hardware architecture to support a true process-oriented operating system. For these reasons, ThreadX

implements a thread model, which is both extremely efficient and practical for most real-time embedded applications.

To avoid confusion, ThreadX does not use the term *task*. Instead, the more descriptive and contemporary name *thread* is used.

#### **ThreadX Benefits**

Using ThreadX provides many benefits to embedded applications. Of course, the primary benefit rests in how embedded application threads are allocated processing time.

## Improved Responsiveness

Prior to real-time kernels like ThreadX, most embedded applications allocated processing time with a simple control loop, usually from within the C main function. This approach is still used in very small or simple applications. However, in large or complex applications, it is not practical because the response time to any event is a function of the worst-case processing time of one pass through the control loop.

Making matters worse, the timing characteristics of the application change whenever modifications are made to the control loop. This makes the application inherently unstable and difficult to maintain and improve on.

ThreadX provides fast and deterministic response times to important external events. ThreadX accomplishes this through its preemptive, priority-based scheduling algorithm, which allows a higher-priority thread to preempt an executing lower-priority thread. As a result, the worst-case response time approaches the time required to perform a context

switch. This is not only deterministic, but it is also extremely fast.

#### Software Maintenance

The ThreadX kernel enables application developers to concentrate on specific requirements of their application threads without having to worry about changing the timing of other areas of the application. This feature also makes it much easier to repair or enhance an application that utilizes ThreadX.

## Increased Throughput

A possible work-around to the control loop response time problem is to add more polling. This improves the responsiveness, but it still doesn't guarantee a constant worst-case response time and does nothing to enhance future modification of the application. Also, the processor is now performing even more unnecessary processing because of the extra polling. All of this unnecessary processing reduces the overall throughput of the system.

An interesting point regarding overhead is that many developers assume that multithreaded environments like ThreadX increase overhead and have a negative impact on total system throughput. But in some cases, multithreading actually reduces overhead by eliminating all of the redundant polling that occurs in control loop environments. The overhead associated with multithreaded kernels is typically a function of the time required for context switching. If the context switch time is less than the polling process, ThreadX provides a solution with the potential of less overhead and more throughput. This makes ThreadX an obvious choice for applications that have any degree of complexity or size.

## Processor Isolation

ThreadX provides a robust processor-independent interface between the application and the underlying processor. This allows developers to concentrate on the application rather than spending a significant amount of time learning hardware details.

#### Dividing the Application

In control loop-based applications, each developer must have an intimate knowledge of the entire application's run-time behavior and requirements. This is because the processor allocation logic is dispersed throughout the entire application. As an application increases in size or complexity, it becomes impossible for all developers to remember the precise processing requirements of the entire application.

ThreadX frees each developer from the worries associated with processor allocation and allows them to concentrate on their specific piece of the embedded application. In addition, ThreadX forces the application to be divided into clearly defined threads. By itself, this division of the application into threads makes development much simpler.

#### Ease of Use

ThreadX is designed with the application developer in mind. The ThreadX architecture and service call interface are designed to be easily understood. As a result, ThreadX developers can quickly use its advanced features.

## Improve Time-to-market

All of the benefits of ThreadX accelerate the software development process. ThreadX takes care of most processor issues and the most common safety certifications, thereby removing this effort from the development schedule. All of this results in a faster time to market!

# Protecting the Software Investment

Because of its architecture, ThreadX is easily ported to new processor and/or development tool environments. This, coupled with the fact that ThreadX insulates applications from details of the underlying processors, makes ThreadX applications highly portable. As a result, the application's migration path is guaranteed, and the original development investment is protected.

# T H R E A D

#### Installation and Use of ThreadX

This chapter contains a description of various issues related to installation, setup, and usage of the high-performance ThreadX kernel.

- Host Considerations 28
- Target Considerations 28
- Product Distribution 29
- ThreadX Installation 30
- Using ThreadX 31
- Small Example System 31
- Troubleshooting 33
- Configuration Options 33
   Smallest Configuration 34
   Fastest Configuration 34
   Global Time Source 34
   Detailed Configuration Options 35
- ThreadX Version ID 40

#### **Host Considerations**

Embedded software is usually developed on Windows or Linux (Unix) host computers. After the application is compiled, linked, and located on the host, it is downloaded to the target hardware for execution.

Usually the target download is done from within the development tool debugger. After download, the debugger is responsible for providing target execution control (go, halt, breakpoint, etc.) as well as access to memory and processor registers.

Most development tool debuggers communicate with the target hardware via on-chip debug (OCD) connections such as JTAG (IEEE 1149.1) and Background Debug Mode (BDM). Debuggers also communicate with target hardware through In-Circuit Emulation (ICE) connections. Both OCD and ICE connections provide robust solutions with minimal intrusion on the target resident software.

As for resources used on the host, the source code for ThreadX is delivered in ASCII format and requires approximately 1 MBytes of space on the host computer's hard disk.



Please review the supplied **readme\_threadx.txt** file for additional host system considerations and options.

#### **Target Considerations**

ThreadX requires between 2 KBytes and 20 KBytes of Read Only Memory (ROM) on the target. Another 1 to 2 KBytes of the target's Random Access Memory (RAM) are required for the ThreadX system stack and other global data structures.

For timer-related functions like service call time-outs, time-slicing, and application timers to function, the underlying target hardware must provide a periodic interrupt source. If the processor has this capability, it is utilized by ThreadX. Otherwise, if the target processor does not have the ability to generate a periodic interrupt, the user's hardware must provide it. Setup and configuration of the timer interrupt is typically located in the *tx\_initialize\_low\_level* assembly file in the ThreadX distribution.



ThreadX is still functional even if no periodic timer interrupt source is available. However, none of the timer-related services are functional. Please review the supplied readme\_threadx.txt file for any additional host system considerations and/or options.

#### **Product Distribution**

The exact content of the distribution disk depends on the target processor, development tools, and the ThreadX package purchased. However, the following is a list of several important files that are common to most product distributions:

#### ThreadX\_Express\_Startup.pdf

This PDF provides a simple, four-step procedure to get ThreadX running on a specific target processor/board and specific development tools.

#### readme\_threadx.txt

Text file containing specific information about the ThreadX port, including information about the target processor and the development tools.

tx\_api.h C header file containing all

system equates, data structures,

and service prototypes.

tx\_port.h C header file containing all

development-tool and targetspecific data definitions and

structures.

**demo\_threadx.c** C file containing a small demo

application.

**tx.a (or tx.lib)** Binary version of the ThreadX C

library that is distributed with the

standard package.

i [

All file names are in lower-case. This naming convention makes it easier to convert the commands to Linux (Unix) development platforms.

#### ThreadX Installation

Installation of ThreadX is straightforward. Refer to the *ThreadX\_Express\_Startup.pdf* file and the *readme\_threadx.txt* file for specific information on installing ThreadX for your specific environment.

*i* [

Be sure to back up the ThreadX distribution disk and store it in a safe location.



Application software needs access to the ThreadX library file (usually tx.a or tx.lib) and the C include files tx\_api.h and tx\_port.h. This is accomplished either by setting the appropriate path for the development tools or by copying these files into the application development area.

#### Using ThreadX

Using ThreadX is easy. Basically, the application code must include *tx\_api.h* during compilation and link with the ThreadX run-time library *tx.a* (or *tx.lib*).

There are four steps required to build a ThreadX application:



Create the standard C *main* function. This function must eventually call *tx\_kernel\_enter* to start ThreadX. Application-specific initialization that does not involve ThreadX may be added prior to entering the kernel.

The ThreadX entry function tx\_kernel\_enter does not return. So be sure not to place any processing or function calls after it.

Create the *tx\_application\_define* function. This is where the initial system resources are created. Examples of system resources include threads, queues, memory pools, event flags groups, mutexes, and semaphores.

Compile application source and link with the ThreadX run-time library *tx.lib*. The resulting image can be downloaded to the target and executed!

#### Small Example System

The small example system in Figure 1 on page 32 shows the creation of a single thread with a priority of 3. The thread executes, increments a counter, then sleeps for one clock tick. This process continues forever.

```
#include
                 "tx api.h"
TX THREAD
                my thread;
main()
{
     /* Enter the ThreadX kernel. */
     tx kernel enter( );
}
void tx application define(void *first unused memory)
     /* Create my thread! */
     tx thread create (&my thread, "My Thread",
        my thread entry, 0x1234, first unused memory, 1024,
           3, 3, TX NO TIME SLICE, TX AUTO START);
}
void my thread entry(ULONG thread input)
     /* Enter into a forever loop. */
     while(1)
           /* Increment thread counter. */
           my thread counter++;
           /* Sleep for 1 tick. */
           tx thread sleep(1);
     }
}
```

#### FIGURE 1. Template for Application Development

Although this is a simple example, it provides a good template for real application development. Once again, please see the *readme\_threadx.txt* file for additional details.

#### **Troubleshooting**

Each ThreadX port is delivered with a demonstration application. It is always a good idea to first get the demonstration system running—either on actual target hardware or simulated environment.



See the **readme\_threadx.txt** file supplied with the distribution for more specific details regarding the demonstration system.

If the demonstration system does not execute properly, the following are some troubleshooting tips:

- 1. Determine how much of the demonstration is running.
- Increase stack sizes (this is more important in actual application code than it is for the demonstration).
- Rebuild the ThreadX library with TX\_ENABLE\_STACK\_CHECKING defined. This will enable the built-in ThreadX stack checking.
- Temporarily bypass any recent changes to see if the problem disappears or changes. Such information should prove useful to Express Logic support engineers.

Follow the procedures outlined in "What We Need From You" on page 12 to send the information gathered from the troubleshooting steps.

#### **Configuration Options**

There are several configuration options when building the ThreadX library and the application using ThreadX. The options below can be defined in the application source, on the command line, or within the *tx\_user.h* include file.



Options defined in tx\_user.h are applied only if the application and ThreadX library are built with TX\_INCLUDE\_USER\_DEFINE\_FILE defined.

## Smallest Configuration

For the smallest code size, the following ThreadX configuration options should be considered (in absence of all other options):

```
TX_DISABLE_ERROR_CHECKING

TX_DISABLE_PREEMPTION_THRESHOLD

TX_DISABLE_NOTIFY_CALLBACKS

TX_DISABLE_REDUNDANT_CLEARING

TX_DISABLE_STACK_FILLING

TX_NOT_INTERRUPTABLE

TX_TIMER_PROCESS_IN_ISR
```

## Fastest Configuration

For the fastest execution, the same configuration options used for the Smallest Configuration previously, but with these options also considered:

```
TX_REACTIVATE_INLINE
TX INLINE THREAD RESUME SUSPEND
```

Review the **readme\_threadx.txt** file for additional options for your specific version of ThreadX. Detailed configuration options are described beginning on page 35.

## Global Time Source

For other Express Logic products (FileX, NetX, GUIX, USBX, etc.), ThreadX defines the number of ThreadX timer ticks that represents one second. Others derive their time requirements based on this constant. By default, the value is 100, assuming a 10ms periodic interrupt. The user may override this value by defining

TX\_TIMER\_TICKS\_PER\_SECOND with the desired value in *tx\_port.h* or within the IDE or command line.

#### **Detailed Configuration Options**

Define	Meaning
TX_BLOCK_POOL_ENABLE_PERFORMANCE_INFO	When defined, enables the gathering of performance information on block pools. By default, this option is not defined.
TX_BYTE_POOL_ENABLE_PERFORMANCE_INFO	When defined, enables the gathering of performance information on byte pools. By default, this option is not defined.
TX_DISABLE_ERROR_CHECKING	Bypasses basic service call error checking. When defined in the application source, all basic parameter error checking is disabled. This may improve performance by as much as 30% and may also reduce the image size. Of course, this option should only be used after the application is thoroughly debugged. By default, this option is not defined.
	ThreadX API return values <i>not</i> affected by disabling error checking are listed in bold in the "Return Values" section of each API description in Chapter 4. The non-bold return values are void if error checking is disabled by using the <i>TX_DISABLE_ERROR_CHECKING</i> option.
TX_DISABLE_NOTIFY_CALLBACKS	When defined, disables the notify callbacks for various ThreadX objects. Using this option slightly reduces code size and improves performance. By default, this

option is not defined.

Meaning

not defined.

When defined, disables the preemption-threshold feature and slightly reduces code size and improves performance. Of course,

the preemption-threshold capabilities are no longer

# Define TX\_DISABLE\_PREEMPTION\_THRESHOLD TX\_DISABLE\_REDUNDANT\_CLEARING

When defined, removes the logic for initializing ThreadX global C data structures to zero. This should only be used if the compiler's initialization code sets all un-initialized C global data to zero. Using this option slightly reduces code size and improves performance during initialization. By default, this option is not defined.

available. By default, this option is

TX\_DISABLE\_STACK\_FILLING

When de the 0xEF each three By defau

When defined, disables placing the 0xEF value in each byte of each thread's stack when created. By default, this option is not defined.

TX\_ENABLE\_EVENT\_TRACE

When defined, ThreadX enables the event gathering code for creating a TraceX trace buffer. See the *TraceX User Guide* for more details.

#### **Define**

#### TX\_ENABLE\_STACK\_CHECKING

#### Meaning

When defined, enables ThreadX run-time stack checking, which includes analysis of how much stack has been used and examination of data pattern "fences" before and after the stack area. If a stack error is detected, the registered application stack error handler is called. This option does result in slightly increased overhead and code size. Review the

tx\_thread\_stack\_error\_notify
API for more information. By
default, this option is not defined.

TX\_EVENT\_FLAGS\_ENABLE\_PERFORMANCE\_INFO

When defined, enables the gathering of performance information on event flags groups. By default, this option is not defined.

TX\_INLINE\_THREAD\_RESUME\_SUSPEND

When defined, ThreadX improves the *tx\_thread\_resume* and *tx\_thread\_suspend* API calls via in-line code. This increases code size but enhances performance of these two API calls.

TX\_MAX\_PRIORITIES

Defines the priority levels for ThreadX. Legal values range from 32 through 1024 (inclusive) and *must* be evenly divisible by 32. Increasing the number of priority levels supported increases the RAM usage by 128 bytes for every group of 32 priorities. However, there is only a negligible effect on performance. By default, this value is set to 32 priority levels.

Define Meaning

TX\_MINIMUM\_STACK

Defines the minimum stack size
(in bytes). It is used for error
checking when threads are
created. The default value is portspecific and is found in tx\_port.h.

**TX\_MISRA\_ENABLE**When defined, ThreadX utilizes
MISRA C compliant conventions.

Refer to the

ThreadX\_MISRA\_Compliance.pdf

for details.

TX MUTEX ENABLE PERFORMANCE INFO

When defined, enables the gathering of performance information on mutexes. By default, this option is not defined.

TX\_NO\_TIMER

When defined, the ThreadX timer logic is completely disabled. This is useful in cases where the ThreadX timer features (thread sleep, API timeouts, time-slicing, and application timers) are not utilized. If TX\_NO\_TIMER is specified, the option

TX\_TIMER\_PROCESS\_IN\_ISR must also be defined.

TX NOT INTERRUPTABLE

When defined, ThreadX does not attempt to minimize interrupt lockout time. This results in faster execution but does slightly increase interrupt lockout time.

TX\_QUEUE\_ENABLE\_PERFORMANCE\_INFO

When defined, enables the gathering of performance information on queues. By default, this option is not defined.

TX\_REACTIVATE\_INLINE

When defined, performs reactivation of ThreadX timers inline instead of using a function call. This improves performance but slightly increases code size. By default, this option is not

defined.

#### **Define** Meaning TX\_SEMAPHORE\_ENABLE\_PERFORMANCE\_INFO When defined, enables the gathering of performance information on semaphores. By default, this option is not defined. TX\_THREAD\_ENABLE\_PERFORMANCE\_INFO Defined, enables the gathering of performance information on threads. By default, this option is not defined. Defined, enables the gathering of TX\_TIMER\_ENABLE\_PERFORMANCE\_INFO performance information on timers. By default, this option is not defined. TX\_TIMER\_PROCESS\_IN\_ISR When defined, eliminates the internal system timer thread for ThreadX. This results in improved performance on timer events and smaller RAM requirements because the timer stack and control block are no longer needed. However, using this



not defined.

Note that services allowed from timers may not be allowed from ISRs and thus might not be allowed

when using this option.

option moves all the timer expiration processing to the timer ISR level. By default, this option is

#### **Define**

TX\_TIMER\_THREAD\_PRIORITY

TX\_TIMER\_THREAD\_STACK\_SIZE

#### Meaning

Defines the priority of the internal ThreadX system timer thread. The default value is priority 0—the highest priority in ThreadX. The default value is defined in *tx port.h*.

Defines the stack size (in bytes) of the internal ThreadX system timer thread. This thread processes all thread sleep requests as well as all service call timeouts. In addition, all application timer callback routines are invoked from this context. The default value is port-specific and is found in *tx port.h*.

#### ThreadX Version ID

The ThreadX version ID can be found in the **readme\_threadx.txt** file. This file also contains a version history of the corresponding port. Application software can obtain the ThreadX version by examining the global string **\_tx\_version\_id**.

# Functional Components of ThreadX

This chapter contains a description of the highperformance ThreadX kernel from a functional perspective. Each functional component is presented in an easy-to-understand manner.

- Execution Overview 44
   Initialization 44
   Thread Execution 44
   Interrupt Service Routines (ISR) 44
   Initialization 45
   Application Timers 46
- Memory Usage 46
   Static Memory Usage 46
   Dynamic Memory Usage 48
- → Initialization 48

  System Reset Vector 48

  Development Tool Initialization 49

  main Function 49

  tx\_kernel\_enter 49

  Application Definition Function 50

  Interrupts 50
- Thread Execution 50
  Thread Execution States 52
  Thread Entry/Exit Notification 54
  Thread Priorities 54
  Thread Scheduling 55
  Round-robin Scheduling 55
  Time-Slicing 55
  Preemption 56
  Preemption-Threshold™ 56
  Priority Inheritance 57
  Thread Creation 57

Thread Control Block TX\_THREAD 57
Currently Executing Thread 59
Thread Stack Area 59
Memory Pitfalls 62
Optional Run-time Stack Checking 62
Reentrancy 62
Thread Priority Pitfalls 63
Priority Overhead 64
Run-time Thread Performance Information 65
Debugging Pitfalls 66

Message Queues 67
 Creating Message Queues 68
 Message Size 68
 Message Queue Capacity 68
 Queue Memory Area 69
 Thread Suspension 69
 Queue Send Notification 70
 Queue Event-chaining™ 70
 Run-time Queue Performance Information 71
 Queue Control Block TX\_QUEUE 72
 Message Destination Pitfall 72

Counting Semaphores 72
 Mutual Exclusion 73
 Event Notification 73
 Creating Counting Semaphores 74
 Thread Suspension 74
 Semaphore Put Notification 74
 Semaphore Event-chaining™ 75
 Run-time Semaphore Performance Information 75
 Semaphore Control Block TX\_SEMAPHORE 76
 Deadly Embrace 76
 Priority Inversion 78

Mutexes 78
 Mutex Mutual Exclusion 79
 Creating Mutexes 79
 Thread Suspension 79
 Run-time Mutex Performance Information 80
 Mutex Control Block TX\_MUTEX 81
 Deadly Embrace 81
 Priority Inversion 81

Event Flags 82



Creating Event Flags Groups 83
Thread Suspension 83

Event Flags Set Notification 83

Event Flags Event-chaining™ 84

Run-time Event Flags Performance Information 84

Event Flags Group Control Block TX\_EVENT\_FLAGS\_GROUP 85

#### Memory Block Pools 85

Creating Memory Block Pools 86

Memory Block Size 86

Pool Capacity 86

Pool's Memory Area 87

**Thread Suspension 87** 

Run-time Block Pool Performance Information 87

Memory Block Pool Control Block TX\_BLOCK\_POOL 88

Overwriting Memory Blocks 89

#### Memory Byte Pools 89

Creating Memory Byte Pools 89

Pool Capacity 90

Pool's Memory Area 90

Thread Suspension 90

Run-time Byte Pool Performance Information 91

Memory Byte Pool Control Block TX BYTE POOL 92

Nondeterministic Behavior 92

Overwriting Memory Blocks 93

#### Application Timers 93

Timer Intervals 93

Timer Accuracy 94

Timer Execution 94

Creating Application Timers 94

Run-time Application Timer Performance Information 95

Application Timer Control Block TX\_TIMER 95

**Excessive Timers 96** 

#### Relative Time 96

#### Interrupts 96

Interrupt Control 97

ThreadX Managed Interrupts 97

ISR Template 99

High-frequency Interrupts 100

Interrupt Latency 100

#### **Execution Overview**

There are four types of program execution within a ThreadX application: Initialization, Thread Execution, Interrupt Service Routines (ISRs), and Application Timers.

Figure 2 on page 45 shows each different type of program execution. More detailed information about each of these types is found in subsequent sections of this chapter.

#### Initialization

As the name implies, this is the first type of program execution in a ThreadX application. Initialization includes all program execution between processor reset and the entry point of the *thread scheduling loop*.

#### Thread Execution

After initialization is complete, ThreadX enters its thread scheduling loop. The scheduling loop looks for an application thread ready for execution. When a ready thread is found, ThreadX transfers control to it. After the thread is finished (or another higher-priority thread becomes ready), execution transfers back to the thread scheduling loop to find the next highest priority ready thread.

This process of continually executing and scheduling threads is the most common type of program execution in ThreadX applications.

### Interrupt Service Routines (ISR)

Interrupts are the cornerstone of real-time systems. Without interrupts it would be extremely difficult to respond to changes in the external world in a timely manner. On detection of an interrupt, the processor saves key information about the current program execution (usually on the stack), then transfers

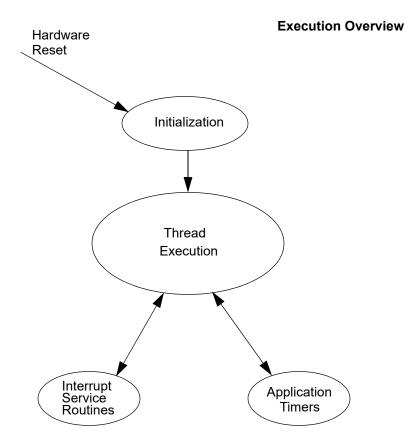


FIGURE 2. Types of Program Execution

control to a predefined program area. This predefined program area is commonly called an Interrupt Service Routine.

In most cases, interrupts occur during thread execution (or in the thread scheduling loop). However, interrupts may also occur inside of an executing ISR or an Application Timer.

#### **Application Timers**

Application Timers are similar to ISRs, except the hardware implementation (usually a single periodic hardware interrupt is used) is hidden from the application. Such timers are used by applications to perform time-outs, periodics, and/or watchdog services. Just like ISRs, Application Timers most often interrupt thread execution. Unlike ISRs, however, Application Timers cannot interrupt each other.

#### **Memory Usage**

ThreadX resides along with the application program. As a result, the static memory (or fixed memory) usage of ThreadX is determined by the development tools; e.g., the compiler, linker, and locator. Dynamic memory (or run-time memory) usage is under direct control of the application.

### Static Memory Usage

Most of the development tools divide the application program image into five basic areas: *instruction*, constant, initialized data, uninitialized data, and system stack. Figure 3 on page 47 shows an example of these memory areas.

It is important to understand that this is only an example. The actual static memory layout is specific to the processor, development tools, and the underlying hardware.

The instruction area contains all of the program's processor instructions. This area is typically the largest and is often located in ROM.

The constant area contains various compiled constants, including strings defined or referenced within the program. In addition, this area contains the "initial copy" of the initialized data area. During the

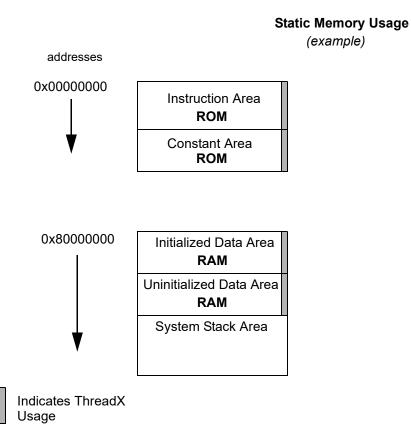


FIGURE 3. Memory Area Example

compiler's initialization process, this portion of the constant area is used to set up the initialized data area in RAM. The constant area usually follows the instruction area and is often located in ROM.

The initialized data and uninitialized data areas contain all of the global and static variables. These areas are always located in RAM.

The system stack is generally set up immediately following the initialized and uninitialized data areas.

The system stack is used by the compiler during initialization, then by ThreadX during initialization and, subsequently, in ISR processing.

### Dynamic Memory Usage

As mentioned before, dynamic memory usage is under direct control of the application. Control blocks and memory areas associated with stacks, queues, and memory pools can be placed anywhere in the target's memory space. This is an important feature because it facilitates easy utilization of different types of physical memory.

For example, suppose a target hardware environment has both fast memory and slow memory. If the application needs extra performance for a high-priority thread, its control block (TX\_THREAD) and stack can be placed in the fast memory area, which may greatly enhance its performance.

#### Initialization

Understanding the initialization process is important. The initial hardware environment is set up here. In addition, this is where the application is given its initial personality.



ThreadX attempts to utilize (whenever possible) the complete development tool's initialization process. This makes it easier to upgrade to new versions of the development tools in the future.

### System Reset Vector

All microprocessors have reset logic. When a reset occurs (either hardware or software), the address of the application's entry point is retrieved from a

Initialization 49

specific memory location. After the entry point is retrieved, the processor transfers control to that location.

The application entry point is quite often written in the native assembly language and is usually supplied by the development tools (at least in template form). In some cases, a special version of the entry program is supplied with ThreadX.

### Development Tool Initialization

After the low-level initialization is complete, control transfers to the development tool's high-level initialization. This is usually the place where initialized global and static C variables are set up. Remember their initial values are retrieved from the constant area. Exact initialization processing is development tool specific.

#### main Function

When the development tool initialization is complete, control transfers to the user-supplied *main* function. At this point, the application controls what happens next. For most applications, the main function simply calls *tx\_kernel\_enter*, which is the entry into ThreadX. However, applications can perform preliminary processing (usually for hardware initialization) prior to entering ThreadX.



The call to tx\_kernel\_enter does not return, so do not place any processing after it!

#### tx\_kernel\_enter

The entry function coordinates initialization of various internal ThreadX data structures and then calls the application's definition function *tx\_application\_define*.

When *tx\_application\_define* returns, control is transferred to the thread scheduling loop. This marks the end of initialization!

## Application Definition Function

The *tx\_application\_define* function defines all of the initial application threads, queues, semaphores, mutexes, event flags, memory pools, and timers. It is also possible to create and delete system resources from threads during the normal operation of the application. However, all initial application resources are defined here.

The tx\_application\_define function has a single input parameter and it is certainly worth mentioning. The first-available RAM address is the sole input parameter to this function. It is typically used as a starting point for initial run-time memory allocations of thread stacks, queues, and memory pools.



After initialization is complete, only an executing thread can create and delete system resources—including other threads. Therefore, at least one thread must be created during initialization.

#### Interrupts


Interrupts are left disabled during the entire initialization process. If the application somehow enables interrupts, unpredictable behavior may occur. Figure 4 on page 51 shows the entire initialization process, from system reset through application-specific initialization.

#### Thread Execution

Scheduling and executing application threads is the most important activity of ThreadX. A thread is typically defined as a semi-independent program segment with a dedicated purpose. The combined processing of all threads makes an application.

Threads are created dynamically by calling tx\_thread\_create during initialization or during thread execution. Threads are created in either a ready or suspended state.



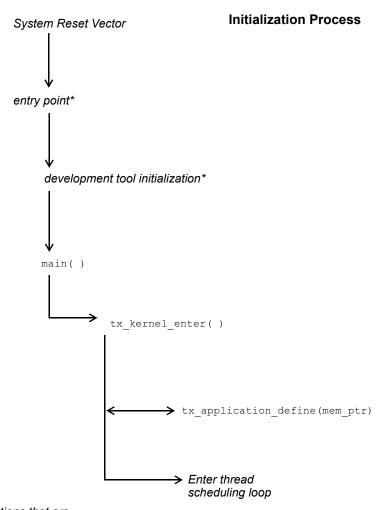

\* denotes functions that are development-tool specific

**FIGURE 4. Initialization Process** 

### Thread Execution States

Understanding the different processing states of threads is a key ingredient to understanding the entire multithreaded environment. In ThreadX there are five distinct thread states: ready, suspended, executing, terminated, and completed. Figure 5 shows the thread state transition diagram for ThreadX.

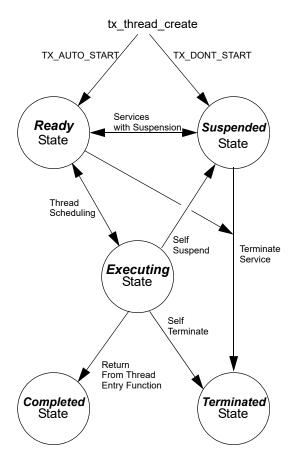


FIGURE 5. Thread State Transition

A thread is in a *ready* state when it is ready for execution. A ready thread is not executed until it is the highest priority thread in ready state. When this happens, ThreadX executes the thread, which then changes its state to *executing*.

If a higher-priority thread becomes ready, the executing thread reverts back to a *ready* state. The newly ready high-priority thread is then executed, which changes its logical state to *executing*. This transition between *ready* and *executing* states occurs every time thread preemption occurs.

At any given moment, only one thread is in an executing state. This is because a thread in the executing state has control of the underlying processor.

Threads in a *suspended* state are not eligible for execution. Reasons for being in a *suspended* state include suspension for time, queue messages, semaphores, mutexes, event flags, memory, and basic thread suspension. After the cause for suspension is removed, the thread is placed back in a *ready* state.

A thread in a *completed* state is a thread that has completed its processing and returned from its entry function. The entry function is specified during thread creation. A thread in a *completed* state cannot execute again.

A thread is in a *terminated* state because another thread or the thread itself called the *tx\_thread\_terminate* service. A thread in a *terminated* state cannot execute again.



If re-starting a completed or terminated thread is desired, the application must first delete the thread. It can then be re-created and re-started.

### Thread Entry/Exit Notification

Some applications may find it advantageous to be notified when a specific thread is entered for the first time, when it completes, or is terminated. ThreadX provides this ability through the tx\_thread\_entry\_exit\_notify service. This service registers an application notification function for a specific thread, which is called by ThreadX whenever the thread starts running, completes, or is terminated. After being invoked, the application notification function can perform the application-specific processing. This typically involves informing another application thread of the event via a ThreadX synchronization primitive.

#### **Thread Priorities**

As mentioned before, a thread is a semi-independent program segment with a dedicated purpose. However, all threads are not created equal! The dedicated purpose of some threads is much more important than others. This heterogeneous type of thread importance is a hallmark of embedded real-time applications.

ThreadX determines a thread's importance when the thread is created by assigning a numerical value representing its *priority*. The maximum number of ThreadX priorities is configurable from 32 through 1024 in increments of 32. The actual maximum number of priorities is determined by the *TX\_MAX\_PRIORITIES* constant during compilation of the ThreadX library. Having a larger number of priorities does not significantly increase processing overhead. However, for each group of 32 priority levels an additional 128 bytes of RAM is required to manage them. For example, 32 priority levels require 128 bytes of RAM, 64 priority levels require 256 bytes of RAM, and 96 priority levels requires 384 bytes of RAM.

By default, ThreadX has 32 priority levels, ranging from priority 0 through priority 31. Numerically

smaller values imply higher priority. Hence, priority 0 represents the highest priority, while priority (*TX\_MAX\_PRIORITIES*-1) represents the lowest priority.

Multiple threads can have the same priority relying on cooperative scheduling or time-slicing. In addition, thread priorities can be changed during run-time.

#### **Thread Scheduling**

ThreadX schedules threads based on their priority. The ready thread with the highest priority is executed first. If multiple threads of the same priority are ready, they are executed in a *first-in-first-out* (FIFO) manner.

### Round-robin Scheduling

ThreadX supports *round-robin* scheduling of multiple threads having the same priority. This is accomplished through cooperative calls to *tx\_thread\_relinquish*. This service gives all other ready threads of the same priority a chance to execute before the *tx\_thread\_relinquish* caller executes again.

#### **Time-Slicing**

Time-slicing is another form of round-robin scheduling. A time-slice specifies the maximum number of timer ticks (timer interrupts) that a thread can execute without giving up the processor. In ThreadX, time-slicing is available on a per-thread basis. The thread's time-slice is assigned during creation and can be modified during run-time. When a time-slice expires, all other ready threads of the same priority level are given a chance to execute before the time-sliced thread executes again.

A fresh thread time-slice is given to a thread after it suspends, relinquishes, makes a ThreadX service call that causes preemption, or is itself time-sliced.

When a time-sliced thread is preempted, it will resume before other ready threads of equal priority for the remainder of its time-slice.



Using time-slicing results in a slight amount of system overhead. Because time-slicing is only useful in cases in which multiple threads share the same priority, threads having a unique priority should not be assigned a time-slice.

#### Preemption

Preemption is the process of temporarily interrupting an executing thread in favor of a higher-priority thread. This process is invisible to the executing thread. When the higher-priority thread is finished, control is transferred back to the exact place where the preemption took place.

This is a very important feature in real-time systems because it facilitates fast response to important application events. Although a very important feature, preemption can also be a source of a variety of problems, including starvation, excessive overhead, and priority inversion.

#### Preemption-Threshold™

To ease some of the inherent problems of preemption, ThreadX provides a unique and advanced feature called *preemption-threshold*.

A preemption-threshold allows a thread to specify a priority *ceiling* for disabling preemption. Threads that have higher priorities than the ceiling are still allowed to preempt, while those less than the ceiling are not allowed to preempt.

For example, suppose a thread of priority 20 only interacts with a group of threads that have priorities between 15 and 20. During its critical sections, the thread of priority 20 can set its preemption-threshold to 15, thereby preventing preemption from all of the

threads that it interacts with. This still permits really important threads (priorities between 0 and 14) to preempt this thread during its critical section processing, which results in much more responsive processing.

Of course, it is still possible for a thread to disable all preemption by setting its preemption-threshold to 0. In addition, preemption-threshold can be changed during run-time.



Using preemption-threshold disables time-slicing for the specified thread.

#### Priority Inheritance

ThreadX also supports optional priority inheritance within its mutex services described later in this chapter. Priority inheritance allows a lower priority thread to temporarily assume the priority of a high priority thread that is waiting for a mutex owned by the lower priority thread. This capability helps the application to avoid nondeterministic priority inversion by eliminating preemption of intermediate thread priorities. Of course, *preemption-threshold* may be used to achieve a similar result.

#### Thread Creation

Application threads are created during initialization or during the execution of other application threads. There is no limit on the number of threads that can be created by an application.

### Thread Control Block TX\_THREAD

The characteristics of each thread are contained in its control block. This structure is defined in the *tx api.h* file.

A thread's control block can be located anywhere in memory, but it is most common to make the control block a global structure by defining it outside the scope of any function.

Locating the control block in other areas requires a bit more care, just like all dynamically allocated memory. If a control block is allocated within a C function, the memory associated with it is part of the calling thread's stack. In general, avoid using local storage for control blocks because after the function returns, all of its local variable stack space is released—regardless of whether another thread is using it for a control block!

In most cases, the application is oblivious to the contents of the thread's control block. However, there are some situations, especially during debug, in which looking at certain members is useful. The following are some of the more useful control block members:

#### tx\_thread\_run\_count

contains a counter of the number of many times the thread has been scheduled. An increasing counter indicates the thread is being scheduled and executed.

#### tx\_thread\_state

contains the state of the associated thread. The following lists the possible thread states:

TX_READY	(0x00)
TX_COMPLETED	(0x01)
TX_TERMINATED	(0x02)
TX_SUSPENDED	(0x03)
TX_SLEEP	(0x04)
TX_QUEUE_SUSP	(0x05)
TX_SEMAPHORE_SUSP	(0x06)
TX_EVENT_FLAG	(0x07)
TX_BLOCK_MEMORY	(0x08)
TX_BYTE_MEMORY	(0x09)
TX MUTEX SUSP	(0x0D)



Of course there are many other interesting fields in the thread control block, including the stack pointer, time-slice value, priorities, etc. Users are welcome to review control block members, but modifications are strictly prohibited!



There is no equate for the "executing" state mentioned earlier in this section. It is not necessary because there is only one executing thread at a given time. The state of an executing thread is also **TX READY**.

#### Currently Executing Thread

As mentioned before, there is only one thread executing at any given time. There are several ways to identify the executing thread, depending on which thread is making the request.

A program segment can get the control block address of the executing thread by calling *tx\_thread\_identify*. This is useful in shared portions of application code that are executed from multiple threads.

In debug sessions, users can examine the internal ThreadX pointer \_tx\_thread\_current\_ptr. It contains the control block address of the currently executing thread. If this pointer is NULL, no application thread is executing; i.e., ThreadX is waiting in its scheduling loop for a thread to become ready.

#### **Thread Stack Area**

Each thread must have its own stack for saving the context of its last execution and compiler use. Most C compilers use the stack for making function calls and for temporarily allocating local variables. Figure 6 on page 60 shows a typical thread's stack.

Where a thread stack is located in memory is up to the application. The stack area is specified during thread creation and can be located anywhere in the

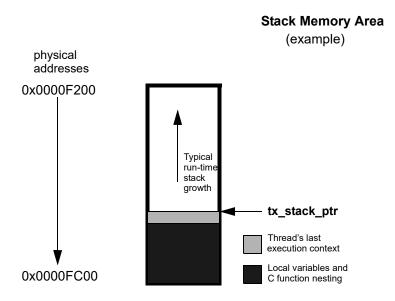


FIGURE 6. Typical Thread Stack

target's address space. This is an important feature because it allows applications to improve performance of important threads by placing their stack in high-speed RAM.

How big a stack should be is one of the most frequently asked questions about threads. A thread's stack area must be large enough to accommodate worst-case function call nesting, local variable allocation, and saving its last execution context.

The minimum stack size, **TX\_MINIMUM\_STACK**, is defined by ThreadX. A stack of this size supports saving a thread's context and minimum amount of function calls and local variable allocation.

For most threads, however, the minimum stack size is too small, and the user must ascertain the worstcase size requirement by examining function-call nesting and local variable allocation. Of course, it is always better to start with a larger stack area.

After the application is debugged, it is possible to tune the thread stack sizes if memory is scarce. A favorite trick is to preset all stack areas with an easily identifiable data pattern like (0xEFEF) prior to creating the threads. After the application has been thoroughly put through its paces, the stack areas can be examined to see how much stack was actually used by finding the area of the stack where the data pattern is still intact. Figure 7 shows a stack preset to 0xEFEF after thorough thread execution.

### Stack Memory Area (another example)




FIGURE 7. Stack Preset to 0xEFEF

By default, ThreadX initializes every byte of each thread stack with a value of 0xEF.

#### **Memory Pitfalls**

The stack requirements for threads can be large. Therefore, it is important to design the application to have a reasonable number of threads. Furthermore, some care must be taken to avoid excessive stack usage within threads. Recursive algorithms and large local data structures should be avoided.

In most cases, an overflowed stack causes thread execution to corrupt memory adjacent (usually before) its stack area. The results are unpredictable, but most often result in an un-natural change in the program counter. This is often called "jumping into the weeds." Of course, the only way to prevent this is to ensure all thread stacks are large enough.

#### Optional Run-time Stack Checking

ThreadX provides the ability to check each thread's stack for corruption during run-time. By default, ThreadX fills every byte of thread stacks with a 0xEF data pattern during creation. If the application builds the ThreadX library with

TX\_ENABLE\_STACK\_CHECKING defined,
ThreadX will examine each thread's stack for
corruption as it is suspended or resumed. If stack
corruption is detected, ThreadX will call the
application's stack error handling routine as specified
by the call to tx\_thread\_stack\_error\_notify.
Otherwise, if no stack error handler was specified,
ThreadX will call the internal
\_tx\_thread\_stack\_error\_handler routine.

#### Reentrancy

One of the real beauties of multithreading is that the same C function can be called from multiple threads. This provides great power and also helps reduce code space. However, it does require that C functions called from multiple threads are *reentrant*.

Basically, a reentrant function stores the caller's return address on the current stack and does not rely on global or static C variables that it previously set

up. Most compilers place the return address on the stack. Hence, application developers must only worry about the use of *globals* and *statics*.

An example of a non-reentrant function is the string token function "strtok" found in the standard C library. This function remembers the previous string pointer on subsequent calls. It does this with a static string pointer. If this function is called from multiple threads, it would most likely return an invalid pointer.

### Thread Priority Pitfalls

Selecting thread priorities is one of the most important aspects of multithreading. It is sometimes very tempting to assign priorities based on a perceived notion of thread importance rather than determining what is exactly required during run-time. Misuse of thread priorities can starve other threads, create priority inversion, reduce processing bandwidth, and make the application's run-time behavior difficult to understand.

As mentioned before, ThreadX provides a priority-based, preemptive scheduling algorithm. Lower priority threads do not execute until there are no higher priority threads ready for execution. If a higher priority thread is always ready, the lower priority threads never execute. This condition is called thread starvation.

Most thread starvation problems are detected early in debug and can be solved by ensuring that higher priority threads don't execute continuously.

Alternatively, logic can be added to the application that gradually raises the priority of starved threads until they get a chance to execute.

Another pitfall associated with thread priorities is *priority inversion*. Priority inversion takes place when a higher priority thread is suspended because a lower priority thread has a needed resource. Of

course, in some instances it is necessary for two threads of different priority to share a common resource. If these threads are the only ones active, the priority inversion time is bounded by the time the lower priority thread holds the resource. This condition is both deterministic and quite normal. However, if threads of intermediate priority become active during this priority inversion condition, the priority inversion time is no longer deterministic and could cause an application failure.

There are principally three distinct methods of preventing nondeterministic priority inversion in ThreadX. First, the application priority selections and run-time behavior can be designed in a manner that prevents the priority inversion problem. Second, lower priority threads can utilize *preemption-threshold* to block preemption from intermediate threads while they share resources with higher priority threads. Finally, threads using ThreadX mutex objects to protect system resources may utilize the optional mutex *priority inheritance* to eliminate nondeterministic priority inversion.

#### **Priority Overhead**

One of the most overlooked ways to reduce overhead in multithreading is to reduce the number of context switches. As previously mentioned, a context switch occurs when execution of a higher priority thread is favored over that of the executing thread. It is worthwhile to mention that higher priority threads can become ready as a result of both external events (like interrupts) and from service calls made by the executing thread.

To illustrate the effects thread priorities have on context switch overhead, assume a three thread environment with threads named *thread\_1*, *thread\_2*, and *thread\_3*. Assume further that all of the threads are in a state of suspension waiting for a message. When thread\_1 receives a message, it immediately

forwards it to thread\_2. Thread\_2 then forwards the message to thread\_3. Thread\_3 just discards the message. After each thread processes its message, it goes back and waits for another message.

The processing required to execute these three threads varies greatly depending on their priorities. If all of the threads have the same priority, a single context switch occurs before the execution of each thread. The context switch occurs when each thread suspends on an empty message queue.

However, if thread\_2 is higher priority than thread\_1 and thread\_3 is higher priority than thread\_2, the number of context switches doubles. This is because another context switch occurs inside of the *tx\_queue\_send* service when it detects that a higher priority thread is now ready.

The ThreadX preemption-threshold mechanism can avoid these extra context switches and still allow the previously mentioned priority selections. This is an important feature because it allows several thread priorities during scheduling, while at the same time eliminating some of the unwanted context switching between them during thread execution.

## Run-time Thread Performance Information

ThreadX provides optional run-time thread performance information. If the ThreadX library and application is built with

TX\_THREAD\_ENABLE\_PERFORMANCE\_INFO defined, ThreadX accumulates the following information:

Total number for the overall system:

- thread resumptions
- thread suspensions
- · service call preemptions
- interrupt preemptions

- priority inversions
- time-slices
- relinquishes
- thread timeouts
- suspension aborts
- idle system returns
- non-idle system returns

#### Total number for each thread:

- resumptions
- suspensions
- service call preemptions
- interrupt preemptions
- priority inversions
- time-slices
- thread relinquishes
- thread timeouts
- suspension aborts

This information is available at run-time through the services  $tx\_thread\_performance\_info\_get$  and  $tx\_thread\_performance\_system\_info\_get$ . Thread performance information is useful in determining if the application is behaving properly. It is also useful in optimizing the application. For example, a relatively high number of service call preemptions might suggest the thread's priority and/or preemption-threshold is too low. Furthermore, a relatively low number of idle system returns might suggest that lower priority threads are not suspending enough.

#### **Debugging Pitfalls**

Debugging multithreaded applications is a little more difficult because the same program code can be executed from multiple threads. In such cases, a break-point alone may not be enough. The debugger



must also view the current thread pointer \_tx\_thread\_current\_ptr using a conditional breakpoint to see if the calling thread is the one to debug.

Much of this is being handled in multithreading support packages offered through various development tool vendors. Because of its simple design, integrating ThreadX with different development tools is relatively easy.

Stack size is always an important debug topic in multithreading. Whenever unexplained behavior is observed, it is usually a good first guess to increase stack sizes for all threads—especially the stack size of the last thread to execute!



It is also a good idea to build the ThreadX library with TX\_ENABLE\_STACK\_CHECKING defined. This will help isolate stack corruption problems as early in the processing as possible!

#### **Message Queues**

Message queues are the primary means of interthread communication in ThreadX. One or more messages can reside in a message queue. A message queue that holds a single message is commonly called a *mailbox*.

Messages are copied to a queue by  $tx\_queue\_send$  and are copied from a queue by  $tx\_queue\_receive$ . The only exception to this is when a thread is suspended while waiting for a message on an empty queue. In this case, the next message sent to the queue is placed directly into the thread's destination area.

Each message queue is a public resource. ThreadX places no constraints on how message queues are used.

#### Creating Message Queues

Message queues are created either during initialization or during run-time by application threads. There is no limit on the number of message queues in an application.

#### Message Size

Each message queue supports a number of fixedsized messages. The available message sizes are 1 through 16 32-bit words inclusive. The message size is specified when the queue is created.

Application messages greater than 16 words must be passed by pointer. This is accomplished by creating a queue with a message size of 1 word (enough to hold a pointer) and then sending and receiving message pointers instead of the entire message.

### Message Queue Capacity

The number of messages a queue can hold is a function of its message size and the size of the memory area supplied during creation. The total message capacity of the queue is calculated by dividing the number of bytes in each message into the total number of bytes in the supplied memory area.

For example, if a message queue that supports a message size of 1 32-bit word (4 bytes) is created with a 100-byte memory area, its capacity is 25 messages.

#### Queue Memory Area

As mentioned before, the memory area for buffering messages is specified during queue creation. Like other memory areas in ThreadX, it can be located anywhere in the target's address space.

This is an important feature because it gives the application considerable flexibility. For example, an application might locate the memory area of an important queue in high-speed RAM to improve performance.

### Thread Suspension

Application threads can suspend while attempting to send or receive a message from a queue. Typically, thread suspension involves waiting for a message from an empty queue. However, it is also possible for a thread to suspend trying to send a message to a full queue.

After the condition for suspension is resolved, the service requested is completed and the waiting thread is resumed. If multiple threads are suspended on the same queue, they are resumed in the order they were suspended (FIFO).

However, priority resumption is also possible if the application calls *tx\_queue\_prioritize* prior to the queue service that lifts thread suspension. The queue prioritize service places the highest priority thread at the front of the suspension list, while leaving all other suspended threads in the same FIFO order.

Time-outs are also available for all queue suspensions. Basically, a time-out specifies the maximum number of timer ticks the thread will stay suspended. If a time-out occurs, the thread is resumed and the service returns with the appropriate error code.

#### Queue Send Notification

Some applications may find it advantageous to be notified whenever a message is placed on a queue. ThreadX provides this ability through the <code>tx\_queue\_send\_notify</code> service. This service registers the supplied application notification function with the specified queue. ThreadX will subsequently invoke this application notification function whenever a message is sent to the queue. The exact processing within the application notification function is determined by the application; however, it typically consists of resuming the appropriate thread for processing the new message.

#### Queue Eventchaining™

The notification capabilities in ThreadX can be used to chain various synchronization events together. This is typically useful when a single thread must process multiple synchronization events.

For example, suppose a single thread is responsible for processing messages from five different queues and must also suspend when no messages are available. This is easily accomplished by registering an application notification function for each queue and introducing an additional counting semaphore. Specifically, the application notification function performs a tx semaphore put whenever it is called (the semaphore count represents the total number of messages in all five queues). The processing thread suspends on this semaphore via the tx semaphore get service. When the semaphore is available (in this case, when a message is available!), the processing thread is resumed. It then interrogates each queue for a message, processes the found message, and performs another tx semaphore get to wait for the next message. Accomplishing this without event-chaining is quite difficult and likely would require more threads and/or additional application code.

In general, event-chaining results in fewer threads, less overhead, and smaller RAM requirements. It also provides a highly flexible mechanism to handle synchronization requirements of more complex systems.

#### Run-time Queue Performance Information

ThreadX provides optional run-time queue performance information. If the ThreadX library and application is built with

TX\_QUEUE\_ENABLE\_PERFORMANCE\_INFO defined, ThreadX accumulates the following information:

Total number for the overall system:

- · messages sent
- · messages received
- queue empty suspensions
- queue full suspensions
- queue full error returns (suspension not specified)
- queue timeouts

#### Total number for each queue:

- messages sent
- messages received
- queue empty suspensions
- queue full suspensions
- queue full error returns (suspension not specified)
- queue timeouts

This information is available at run-time through the services  $tx\_queue\_performance\_info\_get$  and  $tx\_queue\_performance\_system\_info\_get$ . Queue performance information is useful in determining if the application is behaving properly. It is also useful in optimizing the application. For example, a relatively high number of "queue full suspensions"

suggests an increase in the queue size might be beneficial.

#### Queue Control Block TX\_QUEUE

The characteristics of each message queue are found in its control block. It contains interesting information such as the number of messages in the queue. This structure is defined in the *tx\_api.h* file.

Message queue control blocks can also be located anywhere in memory, but it is most common to make the control block a global structure by defining it outside the scope of any function.

#### Message Destination Pitfall

As mentioned previously, messages are copied between the queue area and application data areas. It is important to ensure the destination for a received message is large enough to hold the entire message. If not, the memory following the message destination will likely be corrupted.



This is especially lethal when a too-small message destination is on the stack—nothing like corrupting the return address of a function!

#### **Counting Semaphores**

ThreadX provides 32-bit counting semaphores that range in value between 0 and 4,294,967,295. There are two operations for counting semaphores:  $tx\_semaphore\_get$  and  $tx\_semaphore\_put$ . The get operation decreases the semaphore by one. If the semaphore is 0, the get operation is not successful. The inverse of the get operation is the put operation. It increases the semaphore by one.

Each counting semaphore is a public resource. ThreadX places no constraints on how counting semaphores are used.

Counting semaphores are typically used for *mutual exclusion*. However, counting semaphores can also be used as a method for event notification.

#### **Mutual Exclusion**

Mutual exclusion pertains to controlling the access of threads to certain application areas (also called *critical sections* or *application resources*). When used for mutual exclusion, the "current count" of a semaphore represents the total number of threads that are allowed access. In most cases, counting semaphores used for mutual exclusion will have an initial value of 1, meaning that only one thread can access the associated resource at a time. Counting semaphores that only have values of 0 or 1 are commonly called *binary semaphores*.



If a binary semaphore is being used, the user must prevent the same thread from performing a get operation on a semaphore it already owns. A second get would be unsuccessful and could cause indefinite suspension of the calling thread and permanent unavailability of the resource.

## **Event Notification**

It is also possible to use counting semaphores as event notification, in a producer-consumer fashion. The consumer attempts to get the counting semaphore while the producer increases the semaphore whenever something is available. Such semaphores usually have an initial value of 0 and will not increase until the producer has something ready for the consumer. Semaphores used for event notification may also benefit from use of the tx\_semaphore\_ceiling\_put service call. This service ensures that the semaphore count never exceeds the value supplied in the call.

# Creating Counting Semaphores

Counting semaphores are created either during initialization or during run-time by application threads. The initial count of the semaphore is specified during creation. There is no limit on the number of counting semaphores in an application.

# Thread Suspension

Application threads can suspend while attempting to perform a get operation on a semaphore with a current count of 0.

After a put operation is performed, the suspended thread's get operation is performed and the thread is resumed. If multiple threads are suspended on the same counting semaphore, they are resumed in the same order they were suspended (FIFO).

However, priority resumption is also possible if the application calls *tx\_semaphore\_prioritize* prior to the semaphore put call that lifts thread suspension. The semaphore prioritize service places the highest priority thread at the front of the suspension list, while leaving all other suspended threads in the same FIFO order.

# Semaphore Put Notification

Some applications may find it advantageous to be notified whenever a semaphore is put. ThreadX provides this ability through the tx\_semaphore\_put\_notify service. This service registers the supplied application notification function with the specified semaphore. ThreadX will subsequently invoke this application notification function whenever the semaphore is put. The exact processing within the application notification function is determined by the application; however, it typically consists of resuming the appropriate thread for processing the new semaphore put event.

## Semaphore Eventchaining™

The notification capabilities in ThreadX can be used to chain various synchronization events together. This is typically useful when a single thread must process multiple synchronization events.

For example, instead of having separate threads suspend for a queue message, event flags, and a semaphore, the application can register a notification routine for each object. When invoked, the application notification routine can then resume a single thread, which can interrogate each object to find and process the new event.

In general, event-chaining results in fewer threads, less overhead, and smaller RAM requirements. It also provides a highly flexible mechanism to handle synchronization requirements of more complex systems.

## Run-time Semaphore Performance Information

ThreadX provides optional run-time semaphore performance information. If the ThreadX library and application is built with

TX\_SEMAPHORE\_ENABLE\_PERFORMANCE\_INFO defined, ThreadX accumulates the following information.

Total number for the overall system:

- semaphore puts
- · semaphore gets
- semaphore get suspensions
- · semaphore get timeouts

Total number for each semaphore:

- · semaphore puts
- semaphore gets
- semaphore get suspensions
- semaphore get timeouts

This information is available at run-time through the services *tx\_semaphore\_performance\_info\_get* and *tx\_semaphore\_performance\_system\_info\_get*. Semaphore performance information is useful in determining if the application is behaving properly. It is also useful in optimizing the application. For example, a relatively high number of "semaphore get timeouts" might suggest that other threads are holding resources too long.

## Semaphore Control Block TX SEMAPHORE

The characteristics of each counting semaphore are found in its control block. It contains information such as the current semaphore count. This structure is defined in the *tx api.h* file.

Semaphore control blocks can be located anywhere in memory, but it is most common to make the control block a global structure by defining it outside the scope of any function.

## **Deadly Embrace**

One of the most interesting and dangerous pitfalls associated with semaphores used for mutual exclusion is the *deadly embrace*. A deadly embrace, or *deadlock*, is a condition in which two or more threads are suspended indefinitely while attempting to get semaphores already owned by each other.

This condition is best illustrated by a two thread, two semaphore example. Suppose the first thread owns the first semaphore and the second thread owns the second semaphore. If the first thread attempts to get the second semaphore and at the same time the second thread attempts to get the first semaphore, both threads enter a deadlock condition. In addition, if these threads stay suspended forever, their associated resources are locked-out forever as well. Figure 8 on page 77 illustrates this example.

# Deadly Embrace (example)

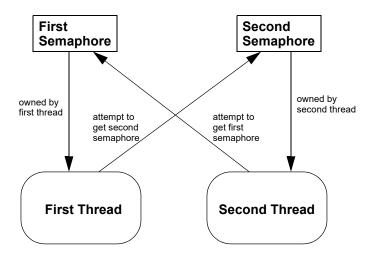


FIGURE 8. Example of Suspended Threads

For real-time systems, deadly embraces can be prevented by placing certain restrictions on how threads obtain semaphores. Threads can only have one semaphore at a time. Alternatively, threads can own multiple semaphores if they gather them in the same order. In the previous example, if the first and second thread obtain the first and second semaphore in order, the deadly embrace is prevented.



It is also possible to use the suspension time-out associated with the get operation to recover from a deadly embrace.

## **Priority Inversion**

Another pitfall associated with mutual exclusion semaphores is priority inversion. This topic is discussed more fully in "Thread Priority Pitfalls" on page 63.

The basic problem results from a situation in which a lower-priority thread has a semaphore that a higher priority thread needs. This in itself is normal. However, threads with priorities in between them may cause the priority inversion to last a non-deterministic amount of time. This can be handled through careful selection of thread priorities, using preemption-threshold, and temporarily raising the priority of the thread that owns the resource to that of the high priority thread.

## **Mutexes**

In addition to semaphores, ThreadX also provides a mutex object. A mutex is basically a binary semaphore, which means that only one thread can own a mutex at a time. In addition, the same thread may perform a successful mutex get operation on an owned mutex multiple times, 4,294,967,295 to be exact. There are two operations on the mutex object:  $tx\_mutex\_get$  and  $tx\_mutex\_put$ . The get operation obtains a mutex not owned by another thread, while the put operation releases a previously obtained mutex. For a thread to release a mutex, the number of put operations must equal the number of prior get operations.

Each mutex is a public resource. ThreadX places no constraints on how mutexes are used.

ThreadX mutexes are used solely for *mutual exclusion*. Unlike counting semaphores, mutexes have no use as a method for event notification.

Mutexes 79

## Mutex Mutual Exclusion

Similar to the discussion in the counting semaphore section, mutual exclusion pertains to controlling the access of threads to certain application areas (also called *critical sections* or *application resources*). When available, a ThreadX mutex will have an ownership count of 0. After the mutex is obtained by a thread, the ownership count is incremented once for every successful get operation performed on the mutex and decremented for every successful put operation.

## **Creating Mutexes**

ThreadX mutexes are created either during initialization or during run-time by application threads. The initial condition of a mutex is always "available." A mutex may also be created with *priority inheritance* selected.

## Thread Suspension

Application threads can suspend while attempting to perform a get operation on a mutex already owned by another thread.

After the same number of put operations are performed by the owning thread, the suspended thread's get operation is performed, giving it ownership of the mutex, and the thread is resumed. If multiple threads are suspended on the same mutex, they are resumed in the same order they were suspended (FIFO).

However, priority resumption is done automatically if the mutex priority inheritance was selected during creation. Priority resumption is also possible if the application calls *tx\_mutex\_prioritize* prior to the mutex put call that lifts thread suspension. The mutex prioritize service places the highest priority thread at the front of the suspension list, while leaving all other suspended threads in the same FIFO order.

## Run-time Mutex Performance Information

ThreadX provides optional run-time mutex performance information. If the ThreadX library and application is built with

**TX\_MUTEX\_ENABLE\_PERFORMANCE\_INFO** defined, ThreadX accumulates the following information.

Total number for the overall system:

- mutex puts
- mutex gets
- · mutex get suspensions
- mutex get timeouts
- mutex priority inversions
- mutex priority inheritances

#### Total number for each mutex:

- mutex puts
- mutex gets
- mutex get suspensions
- mutex get timeouts
- mutex priority inversions
- mutex priority inheritances

This information is available at run-time through the services *tx\_mutex\_performance\_info\_get* and *tx\_mutex\_performance\_system\_info\_get*. Mutex performance information is useful in determining if the application is behaving properly. It is also useful in optimizing the application. For example, a relatively high number of "mutex get timeouts" might suggest that other threads are holding resources too long.

Mutexes 81

## Mutex Control Block TX\_MUTEX

The characteristics of each mutex are found in its control block. It contains information such as the current mutex ownership count along with the pointer of the thread that owns the mutex. This structure is defined in the *tx\_api.h* file.

Mutex control blocks can be located anywhere in memory, but it is most common to make the control block a global structure by defining it outside the scope of any function.

## **Deadly Embrace**

One of the most interesting and dangerous pitfalls associated with mutex ownership is the *deadly embrace*. A deadly embrace, or *deadlock*, is a condition where two or more threads are suspended indefinitely while attempting to get a mutex already owned by the other threads. The discussion of *deadly embrace* and its remedies found on page 76 is completely valid for the mutex object as well.

## **Priority Inversion**

As mentioned previously, a major pitfall associated with mutual exclusion is priority inversion. This topic is discussed more fully in "Thread Priority Pitfalls" on page 63.

The basic problem results from a situation in which a lower priority thread has a semaphore that a higher priority thread needs. This in itself is normal. However, threads with priorities in between them may cause the priority inversion to last a non-deterministic amount of time. Unlike semaphores discussed previously, the ThreadX mutex object has optional *priority inheritance*. The basic idea behind priority inheritance is that a lower priority thread has its priority raised temporarily to the priority of a high priority thread that wants the same mutex owned by the lower priority thread. When the lower priority thread releases the mutex, its original priority is then restored and the higher priority thread is given

ownership of the mutex. This feature eliminates nondeterministic priority inversion by bounding the amount of inversion to the time the lower priority thread holds the mutex. Of course, the techniques discussed earlier in this chapter to handle nondeterministic priority inversion are also valid with mutexes as well.

## **Event Flags**

Event flags provide a powerful tool for thread synchronization. Each event flag is represented by a single bit. Event flags are arranged in groups of 32.

Threads can operate on all 32 event flags in a group at the same time. Events are set by  $tx\_event\_flags\_set$  and are retrieved by  $tx\_event\_flags\_get$ .

Setting event flags is done with a logical AND/OR operation between the current event flags and the new event flags. The type of logical operation (either an AND or OR) is specified in the *tx\_event\_flags\_set* call.

There are similar logical options for retrieval of event flags. A get request can specify that all specified event flags are required (a logical AND).

Alternatively, a get request can specify that any of the specified event flags will satisfy the request (a logical OR). The type of logical operation associated with event flags retrieval is specified in the tx\_event\_flags\_get\_call.



Event flags that satisfy a get request are consumed, i.e., set to zero, if TX\_OR\_CLEAR or TX\_AND\_CLEAR are specified by the request.

Each event flags group is a public resource. ThreadX places no constraints on how event flags groups are used.

# Creating Event Flags Groups

Event flags groups are created either during initialization or during run-time by application threads. At the time of their creation, all event flags in the group are set to zero. There is no limit on the number of event flags groups in an application.

# Thread Suspension

Application threads can suspend while attempting to get any logical combination of event flags from a group. After an event flag is set, the get requests of all suspended threads are reviewed. All the threads that now have the required event flags are resumed.



All suspended threads on an event flags group are reviewed when its event flags are set. This, of course, introduces additional overhead. Therefore, it is good practice to limit the number of threads using the same event flags group to a reasonable number.

# Event Flags Set Notification

Some applications may find it advantageous to be notified whenever an event flag is set. ThreadX provides this ability through the tx\_event\_flags\_set\_notify service. This service registers the supplied application notification function with the specified event flags group. ThreadX will subsequently invoke this application notification function whenever an event flag in the group is set. The exact processing within the application notification function is determined by the application, but it typically consists of resuming the appropriate thread for processing the new event flag.

## Event Flags Eventchaining™

The notification capabilities in ThreadX can be used to "chain" various synchronization events together. This is typically useful when a single thread must process multiple synchronization events.

For example, instead of having separate threads suspend for a queue message, event flags, and a semaphore, the application can register a notification routine for each object. When invoked, the application notification routine can then resume a single thread, which can interrogate each object to find and process the new event.

In general, event-chaining results in fewer threads, less overhead, and smaller RAM requirements. It also provides a highly flexible mechanism to handle synchronization requirements of more complex systems.

# Run-time Event Flags Performance Information

ThreadX provides optional run-time event flags performance information. If the ThreadX library and application is built with

TX\_EVENT\_FLAGS\_ENABLE\_PERFORMANCE\_INFO defined, ThreadX accumulates the following information.

Total number for the overall system:

- · event flags sets
- · event flags gets
- event flags get suspensions
- event flags get timeouts

Total number for each event flags group:

- event flags sets
- event flags gets
- event flags get suspensions
- event flags get timeouts



This information is available at run-time through the services  $tx\_event\_flags\_performance\_info\_get$  and  $tx\_event\_flags\_performance\_system\_info\_get$ . Event Flags performance information is useful in determining if the application is behaving properly. It is also useful in optimizing the application. For example, a relatively high number of timeouts on the  $tx\_event\_flags\_get$  service might suggest that the event flags suspension timeout is too short.

# Event Flags Group Control Block TX EVENT FLAGS GROUP

The characteristics of each event flags group are found in its control block. It contains information such as the current event flags settings and the number of threads suspended for events. This structure is defined in the *tx\_api.h* file.

Event group control blocks can be located anywhere in memory, but it is most common to make the control block a global structure by defining it outside the scope of any function.

## **Memory Block Pools**

Allocating memory in a fast and deterministic manner is always a challenge in real-time applications. With this in mind, ThreadX provides the ability to create and manage multiple pools of fixed-size memory blocks.

Because memory block pools consist of fixed-size blocks, there are never any fragmentation problems. Of course, fragmentation causes behavior that is inherently nondeterministic. In addition, the time required to allocate and free a fixed-size memory block is comparable to that of simple linked-list manipulation. Furthermore, memory block allocation and de-allocation is done at the head of the available list. This provides the fastest possible linked list

processing and might help keep the actual memory block in cache.

Lack of flexibility is the main drawback of fixed-size memory pools. The block size of a pool must be large enough to handle the worst case memory requirements of its users. Of course, memory may be wasted if many different size memory requests are made to the same pool. A possible solution is to make several different memory block pools that contain different sized memory blocks.

Each memory block pool is a public resource. ThreadX places no constraints on how pools are used.

# Creating Memory Block Pools

Memory block pools are created either during initialization or during run-time by application threads. There is no limit on the number of memory block pools in an application.

## Memory Block Size

As mentioned earlier, memory block pools contain a number of fixed-size blocks. The block size, in bytes, is specified during creation of the pool.



ThreadX adds a small amount of overhead—the size of a C pointer—to each memory block in the pool. In addition, ThreadX might have to pad the block size to keep the beginning of each memory block on proper alignment.

## **Pool Capacity**

The number of memory blocks in a pool is a function of the block size and the total number of bytes in the memory area supplied during creation. The capacity of a pool is calculated by dividing the block size (including padding and the pointer overhead bytes) into the total number of bytes in the supplied memory area.

## Pool's Memory Area

As mentioned before, the memory area for the block pool is specified during creation. Like other memory areas in ThreadX, it can be located anywhere in the target's address space.

This is an important feature because of the considerable flexibility it provides. For example, suppose that a communication product has a high-speed memory area for I/O. This memory area is easily managed by making it into a ThreadX memory block pool.

# Thread Suspension

Application threads can suspend while waiting for a memory block from an empty pool. When a block is returned to the pool, the suspended thread is given this block and the thread is resumed.

If multiple threads are suspended on the same memory block pool, they are resumed in the order they were suspended (FIFO).

However, priority resumption is also possible if the application calls *tx\_block\_pool\_prioritize* prior to the block release call that lifts thread suspension. The block pool prioritize service places the highest priority thread at the front of the suspension list, while leaving all other suspended threads in the same FIFO order.

## Run-time Block Pool Performance Information

ThreadX provides optional run-time block pool performance information. If the ThreadX library and application is built with

TX\_BLOCK\_POOL\_ENABLE\_PERFORMANCE\_INFO

defined, ThreadX accumulates the following information.

Total number for the overall system:

- blocks allocated
- · blocks released
- · allocation suspensions
- · allocation timeouts

#### Total number for each block pool:

- blocks allocated
- blocks released
- · allocation suspensions
- allocation timeouts

This information is available at run-time through the services  $tx\_block\_pool\_performance\_info\_get$  and  $tx\_block\_pool\_performance\_system\_info\_get$ . Block pool performance information is useful in determining if the application is behaving properly. It is also useful in optimizing the application. For example, a relatively high number of "allocation suspensions" might suggest that the block pool is too small.

## Memory Block Pool Control Block TX\_BLOCK\_POOL

The characteristics of each memory block pool are found in its control block. It contains information such as the number of memory blocks available and the memory pool block size. This structure is defined in the *tx api.h* file.

Pool control blocks can also be located anywhere in memory, but it is most common to make the control block a global structure by defining it outside the scope of any function.

## Overwriting Memory Blocks

It is important to ensure that the user of an allocated memory block does not write outside its boundaries. If this happens, corruption occurs in an adjacent (usually subsequent) memory area. The results are unpredictable and often fatal!

## **Memory Byte Pools**

ThreadX memory byte pools are similar to a standard C heap. Unlike the standard C heap, it is possible to have multiple memory byte pools. In addition, threads can suspend on a pool until the requested memory is available.

Allocations from memory byte pools are similar to traditional *malloc* calls, which include the amount of memory desired (in bytes). Memory is allocated from the pool in a *first-fit* manner; i.e., the first free memory block that satisfies the request is used. Excess memory from this block is converted into a new block and placed back in the free memory list. This process is called *fragmentation*.

Adjacent free memory blocks are *merged* together during a subsequent allocation search for a large enough free memory block. This process is called *de-fragmentation*.

Each memory byte pool is a public resource. ThreadX places no constraints on how pools are used, except that memory byte services cannot be called from ISRs.

## Creating Memory Byte Pools

Memory byte pools are created either during initialization or during run-time by application threads. There is no limit on the number of memory byte pools in an application.

## **Pool Capacity**

The number of allocatable bytes in a memory byte pool is slightly less than what was specified during creation. This is because management of the free memory area introduces some overhead. Each free memory block in the pool requires the equivalent of two C pointers of overhead. In addition, the pool is created with two blocks, a large free block and a small permanently allocated block at the end of the memory area. This allocated block is used to improve performance of the allocation algorithm. It eliminates the need to continuously check for the end of the pool area during merging.

During run-time, the amount of overhead in the pool typically increases. Allocations of an odd number of bytes are padded to ensure proper alignment of the next memory block. In addition, overhead increases as the pool becomes more fragmented.

## Pool's Memory Area

The memory area for a memory byte pool is specified during creation. Like other memory areas in ThreadX, it can be located anywhere in the target's address space.

This is an important feature because of the considerable flexibility it provides. For example, if the target hardware has a high-speed memory area and a low-speed memory area, the user can manage memory allocation for both areas by creating a pool in each of them.

# Thread Suspension

Application threads can suspend while waiting for memory bytes from a pool. When sufficient contiguous memory becomes available, the suspended threads are given their requested memory and the threads are resumed.

If multiple threads are suspended on the same memory byte pool, they are given memory (resumed) in the order they were suspended (FIFO).

However, priority resumption is also possible if the application calls *tx\_byte\_pool\_prioritize* prior to the byte release call that lifts thread suspension. The byte pool prioritize service places the highest priority thread at the front of the suspension list, while leaving all other suspended threads in the same FIFO order.

## Run-time Byte Pool Performance Information

ThreadX provides optional run-time byte pool performance information. If the ThreadX library and application is built with

TX\_BYTE\_POOL\_ENABLE\_PERFORMANCE\_INFO defined, ThreadX accumulates the following information.

Total number for the overall system:

- allocations
- releases
- fragments searched
- fragments merged
- fragments created
- allocation suspensions
- allocation timeouts

Total number for each byte pool:

- allocations
- releases
- fragments searched
- fragments merged
- fragments created
- allocation suspensions
- allocation timeouts

This information is available at run-time through the services  $tx\_byte\_pool\_performance\_info\_get$  and  $tx\_byte\_pool\_performance\_system\_info\_get$ . Byte pool performance information is useful in determining if the application is behaving properly. It is also useful in optimizing the application. For example, a relatively high number of "allocation suspensions" might suggest that the byte pool is too small.

## Memory Byte Pool Control Block TX BYTE POOL

The characteristics of each memory byte pool are found in its control block. It contains useful information such as the number of available bytes in the pool. This structure is defined in the *tx\_api.h* file.

Pool control blocks can also be located anywhere in memory, but it is most common to make the control block a global structure by defining it outside the scope of any function.

# Nondeterministic Behavior

Although memory byte pools provide the most flexible memory allocation, they also suffer from somewhat nondeterministic behavior. For example, a memory byte pool may have 2,000 bytes of memory available but may not be able to satisfy an allocation request of 1,000 bytes. This is because there are no guarantees on how many of the free bytes are contiguous. Even if a 1,000 byte free block exists, there are no guarantees on how long it might take to find the block. It is completely possible that the entire memory pool would need to be searched to find the 1,000 byte block.



Because of this, it is generally good practice to avoid using memory byte services in areas where deterministic, real-time behavior is required. Many applications pre-allocate their required memory during initialization or run-time configuration.

## Overwriting Memory Blocks

It is important to ensure that the user of allocated memory does not write outside its boundaries. If this happens, corruption occurs in an adjacent (usually subsequent) memory area. The results are unpredictable and often fatal!

## **Application Timers**

Fast response to asynchronous external events is the most important function of real-time, embedded applications. However, many of these applications must also perform certain activities at pre-determined intervals of time.

ThreadX application timers provide applications with the ability to execute application C functions at specific intervals of time. It is also possible for an application timer to expire only once. This type of timer is called a *one-shot timer*, while repeating interval timers are called *periodic timers*.

Each application timer is a public resource. ThreadX places no constraints on how application timers are used.

#### **Timer Intervals**

In ThreadX time intervals are measured by periodic timer interrupts. Each timer interrupt is called a timer *tick*. The actual time between timer ticks is specified by the application, but 10ms is the norm for most implementations. The periodic timer setup is typically found in the *tx initialize low level* assembly file.

It is worth mentioning that the underlying hardware must have the ability to generate periodic interrupts for application timers to function. In some cases, the processor has a built-in periodic interrupt capability. If the processor doesn't have this ability, the user's board must have a peripheral device that can generate periodic interrupts.



ThreadX can still function even without a periodic interrupt source. However, all timer-related processing is then disabled. This includes timeslicing, suspension time-outs, and timer services.

## **Timer Accuracy**

Timer expirations are specified in terms of ticks. The specified expiration value is decreased by one on each timer tick. Because an application timer could be enabled just prior to a timer interrupt (or timer tick), the actual expiration time could be up to one tick early.

If the timer tick rate is 10ms, application timers may expire up to 10ms early. This is more significant for 10ms timers than 1 second timers. Of course, increasing the timer interrupt frequency decreases this margin of error.

## **Timer Execution**

Application timers execute in the order they become active. For example, if three timers are created with the same expiration value and activated, their corresponding expiration functions are guaranteed to execute in the order they were activated.

# **Creating Application Timers**

Application timers are created either during initialization or during run-time by application threads. There is no limit on the number of application timers in an application.

# Run-time Application Timer Performance Information

ThreadX provides optional run-time application timer performance information. If the ThreadX library and application are built with

TX\_TIMER\_ENABLE\_PERFORMANCE\_INFO defined, ThreadX accumulates the following information.

Total number for the overall system:

- activations
- deactivations
- reactivations (periodic timers)
- expirations
- · expiration adjustments

Total number for each application timer:

- activations
- deactivations
- reactivations (periodic timers)
- expirations
- · expiration adjustments

This information is available at run-time through the services  $tx\_timer\_performance\_info\_get$  and  $tx\_timer\_performance\_system\_info\_get$ . Application Timer performance information is useful in determining if the application is behaving properly. It is also useful in optimizing the application.

## Application Timer Control Block TX TIMER

The characteristics of each application timer are found in its control block. It contains useful information such as the 32-bit expiration identification value. This structure is defined in the *tx api.h* file.

Application timer control blocks can be located anywhere in memory, but it is most common to make the control block a global structure by defining it outside the scope of any function.

#### **Excessive Timers**

By default, application timers execute from within a hidden system thread that runs at priority zero, which is typically higher than any application thread. Because of this, processing inside application timers should be kept to a minimum.

It is also important to avoid, whenever possible, timers that expire every timer tick. Such a situation might induce excessive overhead in the application.



As mentioned previously, application timers are executed from a hidden system thread. It is, therefore, important not to select suspension on any ThreadX service calls made from within the application timer's expiration function.

## **Relative Time**

In addition to the application timers mentioned previously, ThreadX provides a single continuously incrementing 32-bit tick counter. The tick counter or *time* is increased by one on each timer interrupt.

The application can read or set this 32-bit counter through calls to *tx\_time\_get* and *tx\_time\_set*, respectively. The use of this tick counter is determined completely by the application. It is not used internally by ThreadX.

## **Interrupts**

Fast response to asynchronous events is the principal function of real-time, embedded applications. The application knows such an event is present through hardware interrupts.

An interrupt is an asynchronous change in processor execution. Typically, when an interrupt occurs, the

Interrupts 97

processor saves a small portion of the current execution on the stack and transfers control to the appropriate interrupt vector. The interrupt vector is basically just the address of the routine responsible for handling the specific type interrupt. The exact interrupt handling procedure is processor specific.

## Interrupt Control

The *tx\_interrupt\_control* service allows applications to enable and disable interrupts. The previous interrupt enable/disable posture is returned by this service. It is important to mention that interrupt control only affects the currently executing program segment. For example, if a thread disables interrupts, they only remain disabled during execution of that thread.



A Non-Maskable Interrupt (NMI) is an interrupt that cannot be disabled by the hardware. Such an interrupt may be used by ThreadX applications. However, the application's NMI handling routine is not allowed to use ThreadX context management or any API services.

# ThreadX Managed Interrupts

ThreadX provides applications with complete interrupt management. This management includes saving and restoring the context of the interrupted execution. In addition, ThreadX allows certain services to be called from within Interrupt Service Routines (ISRs). The following is a list of ThreadX services allowed from application ISRs:

```
tx_block_allocate
tx_block_pool_info_get
tx_block_pool_prioritize
tx_block_pool_performance_info_get
tx_block_pool_performance_system_info_get
tx_block_release
tx_byte_pool_info_get
tx_byte_pool_performance_info_get
tx_byte_pool_performance_system_info_get
tx_byte_pool_performance_system_info_get
tx_byte_pool_performance_system_info_get
```

```
tx event flags info get
tx event flags get
tx event flags set
tx event flags performance info get
tx event flags performance system info get
tx event flags set notify
tx interrupt control
tx mutex performance info get
tx mutex performance system info get
tx queue front send
tx queue info get
tx queue performance info get
tx queue performance system info get
tx queue prioritize
tx queue receive
tx queue send
tx semaphore get
tx queue send notify
tx semaphore ceiling put
tx semaphore info get
tx semaphore performance info get
tx semaphore performance system info get
tx semaphore prioritize
tx semaphore put
tx thread identify
tx semaphore put notify
tx thread entry exit notify
tx thread info get
tx thread resume
tx thread performance info get
tx thread performance system info get
tx thread stack error notify
tx thread wait abort
tx time get
tx time set
tx timer activate
tx timer change
tx timer deactivate
tx timer info get
tx timer performance info get
tx timer performance system info get
```



Suspension is not allowed from ISRs. Therefore, the wait\_option parameter for all ThreadX service calls made from an ISR must be set to TX NO WAIT.

Interrupts 99

## **ISR Template**

To manage application interrupts, several ThreadX utilities must be called in the beginning and end of application ISRs. The exact format for interrupt handling varies between ports. Review the *readme\_threadx.txt* file on the distribution disk for specific instructions on managing ISRs.

The following small code segment is typical of most ThreadX managed ISRs. In most cases, this processing is in assembly language.

```
_application_ISR_vector_entry:
; Save context and prepare for
; ThreadX use by calling the ISR
; entry function.

CALL _tx_thread_context_save

; The ISR can now call ThreadX
; services and its own C functions

; When the ISR is finished, context
; is restored (or thread preemption)
; by calling the context restore
; function. Control does not return!

JUMP tx thread context restore
```

# High-frequency Interrupts

Some interrupts occur at such a high frequency that saving and restoring full context upon each interrupt would consume excessive processing bandwidth. In such cases, it is common for the application to have a small assembly language ISR that does a limited amount of processing for a majority of these high-frequency interrupts.

After a certain point in time, the small ISR may need to interact with ThreadX. This is accomplished by calling the entry and exit functions described in the above template.

## Interrupt Latency

ThreadX locks out interrupts over brief periods of time. The maximum amount of time interrupts are disabled is on the order of the time required to save or restore a thread's context.

# Description of ThreadX Services

This chapter contains a description of all ThreadX services in alphabetic order. Their names are designed so all similar services are grouped together. In the "Return Values" section in the following descriptions, values in **BOLD** are not affected by the **TX\_DISABLE\_ERROR\_CHECKING** define used to disable API error checking; while values shown in non-bold are completely disabled. In addition, a "Yes" listed under the "Preemption Possible" heading indicates that

calling the service may resume a higher-priority thread,

- thus preempting the calling thread.

  tx\_block\_allocate 108

  Allocate fixed-size block of memory
- tx\_block\_pool\_create 112

  Create pool of fixed-size memory blocks
- tx\_block\_pool\_delete 114

  Delete memory block pool
- tx\_block\_pool\_info\_get 116

  Retrieve information about block pool
- tx\_block\_pool\_performance\_info\_get 118

  Get block pool performance information
- tx\_block\_pool\_performance\_system\_info\_get 120

  Get block pool system performance information
- tx\_block\_pool\_prioritize 122

  Prioritize block pool suspension list
- tx\_block\_release 124

  Release fixed-size block of memory
- tx\_byte\_allocate 126

  Allocate bytes of memory

- tx\_byte\_pool\_create 130

  Create memory pool of bytes
- tx\_byte\_pool\_delete 132

  Delete memory byte pool
- tx\_byte\_pool\_info\_get 134

  Retrieve information about byte pool
- tx\_byte\_pool\_performance\_info\_get

  Get byte pool performance information 136
- tx\_byte\_pool\_performance\_system\_info\_get 138

  Get byte pool system performance information
- tx\_byte\_pool\_prioritize 140

  Prioritize byte pool suspension list
- tx\_byte\_release 142

  Release bytes back to memory pool
- tx\_event\_flags\_create 144

  Create event flags group
- tx\_event\_flags\_delete 146

  Delete event flags group
- tx\_event\_flags\_get 148

  Get event flags from event flags group
- tx\_event\_flags\_info\_get 152

  Retrieve information about event flags group
- tx\_event\_flags\_performance info\_get 154

  Get event flags group performance information
- tx\_event\_flags\_performance\_system\_info\_get 156

  Retrieve performance system information
- tx\_event\_flags\_set 158
  Set event flags in an event flags group
- tx\_event\_flags\_set\_notify 160

  Notify application when event flags are set
- tx\_interrupt\_control 162

  Enable and disable interrupts

- tx\_mutex\_create 164

  Create mutual exclusion mutex
- tx\_mutex\_delete 166

  Delete mutual exclusion mutex
- tx\_mutex\_get 168

  Obtain ownership of mutex
- tx\_mutex\_info\_get 170

  Retrieve information about mutex
- tx\_mutex\_performance\_info\_get 172

  Get mutex performance information
- tx\_mutex\_performance\_system\_info\_get 174

  Get mutex system performance information
- tx\_mutex\_prioritize 176

  Prioritize mutex suspension list
- tx\_mutex\_put 178

  Release ownership of mutex
- tx\_queue\_create 180

  Create message queue
- tx\_queue\_delete 182

  Delete message queue
- tx\_queue\_flush 184

  Empty messages in message queue
- tx\_queue\_front\_send 186

  Send message to the front of queue
- tx\_queue\_info\_get 188

  Retrieve information about queue
- tx\_queue\_performance\_info\_get 190

  Get queue performance information
- tx\_queue\_performance\_system\_info\_get 192

  Get queue system performance information
- tx\_queue\_prioritize 194

  Prioritize queue suspension list

- tx\_queue\_receive 196

  Get message from message queue
- tx\_queue\_send 200
  Send message to message queue
- tx\_queue\_send\_notify 202

  Notify application when message is sent to queue
- tx\_semaphore\_ceiling\_put 204

  Place an instance in counting semaphore with ceiling
- tx\_semaphore\_create 206

  Create counting semaphore
- tx\_semaphore\_delete 208

  Delete counting semaphore
- tx\_semaphore\_get 210

  Get instance from counting semaphore
- tx\_semaphore\_info\_get 212

  Retrieve information about semaphore
- tx\_semaphore\_performance\_info\_get 214

  Get semaphore performance information
- tx\_semaphore\_performance\_system\_info\_get 216

  Get semaphore system performance information
- tx\_semaphore\_prioritize 218

  Prioritize semaphore suspension list
- tx\_semaphore\_put 220

  Place an instance in counting seaphore
- tx\_semaphore\_put\_notify 222

  Notify application when semaphore is put
- tx\_thread\_create 224

  Create application thread
- tx\_thread\_delete 228

  Delete application thread
- tx\_thread\_entry\_exit\_notify 230

  Notify application upon thread entry and exit

- tx\_thread\_identify 232

  Retrieves pointer to currently executing thread
- tx\_thread\_info\_get 234

  Retrieve information about thread
- tx\_thread\_performance\_info\_get 238

  Get thread performance information
- tx\_thread\_performance\_system\_info\_get 242

  Get thread system performance information
- tx\_thread\_preemption\_change 246

  Change preemption-threshold of application thread
- tx\_thread\_priority\_change 248
  Change priority of application thread
- tx\_thread\_relinquish 250

  Relinquish control to other application threads
- tx\_thread\_reset 252
  Reset thread
- tx\_thread\_resume 254

  Resume suspended application thread
- tx\_thread\_sleep 256
  Suspend current thread for specified time
- tx\_thread\_stack\_error\_notify 258

  Register thread stack error notification callback
- tx\_thread\_suspend 260
  Suspend application thread
- tx\_thread\_terminate 262

  Terminates application thread
- tx\_thread\_time\_slice\_change 264
  Changes time-slice of application thread
- tx\_thread\_wait\_abort 266

  Abort suspension of specified thread
- tx\_time\_get 268

  Retrieves the current time

- tx\_time\_set 270
  Sets the current time
- tx\_timer\_activate 272

  Activate application timer
- tx\_timer\_change 274

  Change application timer
- tx\_timer\_create 276

  Create application timer
- tx\_timer\_deactivate 278

  Deactivate application timer
- tx\_timer\_delete 280

  Delete application timer
- tx\_timer\_info\_get 282

  Retrieve information about an application timer
- tx\_timer\_performance\_info\_get 284

  Get timer performance information
- tx\_timer\_performance\_system\_info\_get 286

  Get timer system performance information

# T H R E A D

## tx block allocate

## Allocate fixed-size block of memory

## **Prototype**

## **Description**

This service allocates a fixed-size memory block from the specified memory pool. The actual size of the memory block is determined during memory pool creation.



It is important to ensure application code does not write outside the allocated memory block. If this happens, corruption occurs in an adjacent (usually subsequent) memory block. The results are unpredictable and often fatal!

#### **Parameters**

**pool\_ptr** Pointer to a previously created memory block

pool.

**block\_ptr** Pointer to a destination block pointer. On

successful allocation, the address of the allocated memory block is placed where this

parameter points.

**wait option** Defines how the service behaves if there are no

memory blocks available. The wait options are

defined as follows:

 TX\_NO\_WAIT
 (0x00000000)

 TX\_WAIT\_FOREVER
 (0xFFFFFFFF)

 timeout value
 (0x00000001 through)

0xFFFFFFE)

Selecting TX\_NO\_WAIT results in an immediate return from this service regardless if it was successful or not. This is the only valid option if the service is called from a non-thread; e.g.,

Initialization, timer, or ISR.



Selecting TX\_WAIT\_FOREVER causes the calling thread to suspend indefinitely until a memory block is available.

Selecting a numeric value (1-0xFFFFFFE) specifies the maximum number of timer-ticks to stay suspended while waiting for a memory block.

## **Return Values**

TX_SUCCESS	(0x00)	Successful memory block allocation.
TX_DELETED	(0x01)	Memory block pool was deleted while thread was suspended.
TX_NO_MEMORY	(0x10)	Service was unable to allocate a block of memory within the specified time to wait.
TX_WAIT_ABORTED	(0x1A)	Suspension was aborted by another thread, timer or ISR.
TX_POOL_ERROR	(0x02)	Invalid memory block pool pointer.
TX_PTR_ERROR	(0x03)	Invalid pointer to destination pointer.
TX_WAIT_ERROR	(0x04)	A wait option other than TX_NO_WAIT was specified on a call from a non-thread.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Preemption Possible**

Yes

#### See Also

tx\_block\_pool\_create, tx\_block\_pool\_delete, tx\_block\_pool\_info\_get, tx\_block\_pool\_performance\_info\_get, tx\_block\_pool\_performance\_system\_info\_get, tx\_block\_pool\_prioritize, tx\_block\_release

# THREAD

## tx block pool create

## Create pool of fixed-size memory blocks

## **Prototype**

```
UINT tx_block_pool_create(TX_BLOCK_POOL *pool_ptr,

CHAR *name_ptr, ULONG block_size,

VOID *pool start, ULONG pool size)
```

## **Description**

This service creates a pool of fixed-size memory blocks. The memory area specified is divided into as many fixed-size memory blocks as possible using the formula:

```
total blocks = (total bytes) / (block size + sizeof(void *))
```

i

Each memory block contains one pointer of overhead that is invisible to the user and is represented by the "sizeof(void \*)" in the preceding formula.

#### **Parameters**

pool_ptr	Pointer to a memory block pool control block.
name_ptr	Pointer to the name of the memory block pool.
block_size	Number of bytes in each memory block.
pool_start	Starting address of the memory block pool. The starting address must be aligned to the size of the ULONG data type.
pool_size	Total number of bytes available for the memory block pool.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful memory block pool creation.
TX_POOL_ERROR	(0x02)	Invalid memory block pool pointer. Either the pointer is NULL or the pool is already created.
TX_PTR_ERROR	(0x03)	Invalid starting address of the pool.
TX_SIZE_ERROR	(0x05)	Size of pool is invalid.
TX CALLER ERROR	(0x13)	Invalid caller of this service.

#### **Allowed From**

Initialization and threads

## **Preemption Possible**

No

## **Example**

```
tx_block_allocate, tx_block_pool_delete, tx_block_pool_info_get, tx_block_pool_performance_info_get, tx_block_pool_performance_system_info_get, tx_block_pool_prioritize, tx_block_release
```

## tx block pool delete

## Delete memory block pool

### **Prototype**

UINT tx\_block\_pool\_delete(TX BLOCK POOL \*pool\_ptr)

## **Description**

This service deletes the specified block-memory pool. All threads suspended waiting for a memory block from this pool are resumed and given a TX\_DELETED return status.



It is the application's responsibility to manage the memory area associated with the pool, which is available after this service completes. In addition, the application must prevent use of a deleted pool or its former memory blocks.

#### **Parameters**

**pool\_ptr** Pointer to a previously created memory block

pool.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful memory block pool

deletion.

TX POOL ERROR (0x02) Invalid memory block pool pointer.

TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

#### Allowed From

**Threads** 

## **Preemption Possible**

Yes

```
TX_BLOCK_POOL my_pool;
UINT status;

/* Delete entire memory block pool. Assume that the pool has already been created with a call to tx_block_pool_create. */
status = tx_block_pool_delete(&my_pool);

/* If status equals TX_SUCCESS, the memory block pool is deleted. */
```

```
tx_block_allocate, tx_block_pool_create, tx_block_pool_info_get, tx_block_pool_performance_info_get, tx_block_pool_performance_system_info_get, tx_block_pool_prioritize, tx_block_release
```

# tx\_block\_pool\_info\_get

## Retrieve information about block pool

## **Prototype**

## Description

This service retrieves information about the specified block memory pool.

#### **Parameters**

**pool\_ptr** Pointer to previously created memory block pool.

**name** Pointer to destination for the pointer to the block

pool's name.

available Pointer to destination for the number of available

blocks in the block pool.

**total blocks** Pointer to destination for the total number of

blocks in the block pool.

**first\_suspended** Pointer to destination for the pointer to the thread

that is first on the suspension list of this block

pool.

**suspended\_count** Pointer to destination for the number of threads

currently suspended on this block pool.

**next pool** Pointer to destination for the pointer of the next

created block pool.

j Sup

Supplying a TX\_NULL for any parameter indicates the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful block pool information retrieve.

TX POOL ERROR (0x02) Invalid memory block pool pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

## Example

```
TX_BLOCK_POOL my_pool;
CHAR
                  *name;
                *name;
available;
ULONG available;
ULONG total_blocks;
TX_THREAD *first_suspended;
ULONG suspended_count;
TX_BLOCK_POOL *next_pool;
UINT
                status;
/* Retrieve information about the previously created
   block pool "my pool." */
status = tx block pool info get(&my pool, &name,
                   &available, &total blocks,
                   &first suspended, &suspended count,
                   &next pool);
/\star If status equals TX SUCCESS, the information requested is
   valid. */
```

```
tx_block_allocate, tx_block_pool_create, tx_block_pool_delete, tx_block_pool_info_get, tx_block_pool_performance_info_get, tx_block_pool_performance_system_info_get, tx_block_pool_prioritize, tx_block_release
```

# tx\_block\_pool\_performance\_info\_get

## Get block pool performance information

## **Prototype**

## **Description**

This service retrieves performance information about the specified memory block pool.

i J

The ThreadX library and application must be built with TX\_BLOCK\_POOL\_ENABLE\_PERFORMANCE\_INFO defined for this service to return performance information.

#### **Parameters**

**pool\_ptr** Pointer to previously created memory block pool.

**allocates** Pointer to destination for the number of allocate

requests performed on this pool.

**releases** Pointer to destination for the number of release

requests performed on this pool.

**suspensions** Pointer to destination for the number of thread

allocation suspensions on this pool.

**timeouts** Pointer to destination for the number of allocate

suspension timeouts on this pool.

i

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful block pool performance get.
TX_PTR_ERROR	(0x03)	Invalid block pool pointer.
TX_FEATURE_NOT_ENABLED	(0xFF)	The system was not compiled with performance information enabled.

#### Allowed From

Initialization, threads, timers, and ISRs

## Example

```
TX_BLOCK_POOL my_pool;
ULONG allocates;
ULONG releases;
ULONG suspensions;
ULONG timeouts;

/* Retrieve performance information on the previously created block pool. */
status = tx_block_pool_performance_info_get(&my_pool, &allocates, &releases, &suspensions, &timeouts);

/* If status is TX_SUCCESS the performance information was successfully retrieved. */
```

```
tx_block_allocate, tx_block_pool_create, tx_block_pool_delete, tx_block_pool_info_get, tx_block_pool_performance_info_get, tx_block_pool_performance_system_info_get, tx_block_release
```

# tx\_block\_pool\_performance\_system\_info\_get

## Get block pool system performance information

### **Prototype**

### Description

This service retrieves performance information about all memory block pools in the application.

\_*i*\_

The ThreadX library and application must be built with TX\_BLOCK\_POOL\_ENABLE\_PERFORMANCE\_INFO defined for this service to return performance information.

#### **Parameters**

**allocates** Pointer to destination for the total number of

allocate requests performed on all block pools.

**releases** Pointer to destination for the total number of

release requests performed on all block pools.

**suspensions** Pointer to destination for the total number of

thread allocation suspensions on all block pools.

**timeouts** Pointer to destination for the total number of

allocate suspension timeouts on all block pools.

i

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful block pool

system performance get.

**TX\_FEATURE\_NOT\_ENABLED** (0xFF) The system was not

compiled with performance

information enabled.

#### **Allowed From**

Initialization, threads, timers, and ISRs

## **Example**

```
ULONG allocates;
ULONG releases;
ULONG suspensions;
ULONG timeouts;

/* Retrieve performance information on all the block pools in the system. */
status = tx_block_pool_performance_system_info_get(&allocates, &releases, &suspensions, &timeouts);

/* If status is TX_SUCCESS the performance information was successfully retrieved. */
```

```
tx_block_allocate, tx_block_pool_create, tx_block_pool_delete, tx_block_pool_info_get, tx_block_pool_performance_info_get, tx_block_pool_prioritize, tx_block_release
```

# tx\_block\_pool\_prioritize

## Prioritize block pool suspension list

### **Prototype**

UINT tx\_block\_pool\_prioritize(TX BLOCK POOL \*pool\_ptr)

## **Description**

This service places the highest priority thread suspended for a block of memory on this pool at the front of the suspension list. All other threads remain in the same FIFO order they were suspended in.

#### **Parameters**

**pool\_ptr** Pointer to a memory block pool control block.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful block pool prioritize.

TX\_POOL\_ERROR (0x02) Invalid memory block pool pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Preemption Possible**

No

```
TX_BLOCK_POOL my_pool;
UINT status;

/* Ensure that the highest priority thread will receive
    the next free block in this pool. */
status = tx_block_pool_prioritize(&my_pool);

/* If status equals TX_SUCCESS, the highest priority
    suspended thread is at the front of the list. The
    next tx block release call will wake up this thread. */
```

#### See Also

tx\_block\_allocate, tx\_block\_pool\_create, tx\_block\_pool\_delete, tx\_block\_pool\_info\_get, tx\_block\_pool\_performance\_info\_get, tx\_block\_pool\_performance\_system\_info\_get, tx\_block\_release

# tx\_block\_release

## Release fixed-size block of memory

### **Prototype**

UINT tx\_block\_release(VOID \*block\_ptr)

## **Description**

This service releases a previously allocated block back to its associated memory pool. If there are one or more threads suspended waiting for memory blocks from this pool, the first thread suspended is given this memory block and resumed.



The application must prevent using a memory block area after it has been released back to the pool.

#### **Parameters**

**block\_ptr** Pointer to the previously allocated memory

block.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful memory block release.

TX\_PTR\_ERROR (0x03) Invalid pointer to memory block.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Preemption Possible**

Yes

#### See Also

tx\_block\_allocate, tx\_block\_pool\_create, tx\_block\_pool\_delete, tx\_block\_pool\_info\_get, tx\_block\_pool\_performance\_info\_get, tx\_block\_pool\_performance\_system\_info\_get, tx\_block\_pool\_prioritize

# tx\_byte\_allocate

## Allocate bytes of memory

## **Prototype**

```
UINT tx_byte_allocate(TX_BYTE_POOL *pool_ptr,

VOID **memory_ptr, ULONG memory_size,

ULONG wait_option)
```

## Description

This service allocates the specified number of bytes from the specified memory byte pool.



It is important to ensure application code does not write outside the allocated memory block. If this happens, corruption occurs in an adjacent (usually subsequent) memory block. The results are unpredictable and often fatal!



The performance of this service is a function of the block size and the amount of fragmentation in the pool. Hence, this service should not be used during time-critical threads of execution.

#### **Parameters**

**pool\_ptr** Pointer to a previously created memory pool.

**memory\_ptr** Pointer to a destination memory pointer. On

successful allocation, the address of the allocated memory area is placed where this

parameter points to.

**memory\_size** Number of bytes requested.

wait\_option Defines how the service behaves if there is not

enough memory available. The wait options are

defined as follows:

 TX\_NO\_WAIT
 (0x00000000)

 TX\_WAIT\_FOREVER
 (0xFFFFFFFF)

 timeout value
 (0x00000001 through 0xFFFFFFFE)

Selecting TX\_NO\_WAIT results in an immediate return from this service regardless of whether or



not it was successful. This is the only valid option if the service is called from initialization.

Selecting TX\_WAIT\_FOREVER causes the calling thread to suspend indefinitely until enough memory is available.

Selecting a numeric value (1-0xFFFFFFE) specifies the maximum number of timer-ticks to stay suspended while waiting for the memory.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful memory allocation.
TX_DELETED	(0x01)	Memory pool was deleted while thread was suspended.
TX_NO_MEMORY	(0x10)	Service was unable to allocate the memory within the specified time to wait.
TX_WAIT_ABORTED	(0x1A)	Suspension was aborted by another thread, timer, or ISR.
TX_POOL_ERROR	(0x02)	Invalid memory pool pointer.
TX_PTR_ERROR	(0x03)	Invalid pointer to destination pointer.
TX_SIZE_ERROR	(0X05)	Requested size is zero or larger than the pool.
TX_WAIT_ERROR	(0x04)	A wait option other than TX_NO_WAIT was specified on a call from a non-thread.
TX_CALLER_ERROR	(0x13)	Invalid caller of this service.

## Allowed From

Initialization and threads

## **Preemption Possible**

Yes

#### See Also

tx\_byte\_pool\_create, tx\_byte\_pool\_delete, tx\_byte\_pool\_info\_get, tx\_byte\_pool\_performance\_info\_get, tx\_byte\_pool\_performance\_system\_info\_get, tx\_byte\_pool\_prioritize, tx\_byte\_release

# T H R E A D

# tx\_byte\_pool\_create

## Create memory pool of bytes

## **Prototype**

```
UINT tx_byte_pool_create(TX_BYTE_POOL *pool_ptr,

CHAR *name_ptr, VOID *pool_start,

ULONG pool size)
```

## **Description**

This service creates a memory byte pool in the area specified. Initially the pool consists of basically one very large free block. However, the pool is broken into smaller blocks as allocations are made.

#### **Parameters**

pool_ptr	Pointer to a memory pool control block.
name_ptr	Pointer to the name of the memory pool .
pool_start	Starting address of the memory pool. The starting address must be aligned to the size of the ULONG data type.
pool_size	Total number of bytes available for the memory pool.

#### **Return Values**

TY SUCCESS

IX_SUCCESS	(UXUU)	Successial memory poor creation.
TX_POOL_ERROR	(0x02)	Invalid memory pool pointer. Either the pointer is NULL or the pool is already created.
TX_PTR_ERROR	(0x03)	Invalid starting address of the pool.
TX_SIZE_ERROR	(0x05)	Size of pool is invalid.
TX_CALLER_ERROR	(0x13)	Invalid caller of this service.

(0x00) Successful memory pool creation

#### Allowed From

Initialization and threads

## **Preemption Possible**

No



```
tx_byte_allocate, tx_byte_pool_delete, tx_byte_pool_info_get, tx_byte_pool_performance_info_get, tx_byte_pool_performance_system_info_get, tx_byte_pool_prioritize, tx_byte_release
```

# tx\_byte\_pool\_delete

## Delete memory byte pool

### **Prototype**

UINT tx\_byte\_pool\_delete(TX BYTE POOL \*pool\_ptr)

## **Description**

This service deletes the specified memory byte pool. All threads suspended waiting for memory from this pool are resumed and given a TX\_DELETED return status.



It is the application's responsibility to manage the memory area associated with the pool, which is available after this service completes. In addition, the application must prevent use of a deleted pool or memory previously allocated from it.

#### **Parameters**

**pool\_ptr** Pointer to a previously created memory pool.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful memory pool deletion.

TX\_POOL\_ERROR (0x02) Invalid memory pool pointer.

TX CALLER ERROR (0x13) Invalid caller of this service.

#### Allowed From

Threads

## **Preemption Possible**

Yes

```
TX_BYTE_POOL my_pool;
UINT status;

/* Delete entire memory pool. Assume that the pool has already been created with a call to tx_byte_pool_create. */
status = tx_byte_pool_delete(&my_pool);

/* If status equals TX SUCCESS, memory pool is deleted. */
```

```
tx_byte_allocate, tx_byte_pool_create, tx_byte_pool_info_get, tx_byte_pool_performance_info_get, tx_byte_pool_performance_system_info_get, tx_byte_pool_prioritize, tx_byte_release
```

# tx byte pool info get

## Retrieve information about byte pool

### **Prototype**

## Description

This service retrieves information about the specified memory byte pool.

#### **Parameters**

**pool\_ptr** Pointer to previously created memory pool.

**name** Pointer to destination for the pointer to the byte

pool's name.

**available** Pointer to destination for the number of available

bytes in the pool.

**fragments** Pointer to destination for the total number of

memory fragments in the byte pool.

**first\_suspended** Pointer to destination for the pointer to the thread

that is first on the suspension list of this byte

pool.

**suspended\_count** Pointer to destination for the number of threads

currently suspended on this byte pool.

**next pool** Pointer to destination for the pointer of the next

created byte pool.

i

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful pool information retrieve.

TX POOL ERROR (0x02) Invalid memory pool pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Preemption Possible**

No

## **Example**

```
TX BYTE POOL my_pool;
             *name;
CHAR
ULONG available;
ULONG fragments;
            available;
TX_THREAD *first_suspended;
ULONG suspended_count;
TX BYTE POOL *next pool;
UINT status;
/\star Retrieve information about the previously created
  block pool "my pool." */
status = tx byte pool info get(&my pool, &name,
                    &available, &fragments,
                    &first suspended, &suspended count,
                    &next pool);
/* If status equals TX SUCCESS, the information requested is
   valid. */
```

```
tx_byte_allocate, tx_byte_pool_create, tx_byte_pool_delete, tx_byte_pool_performance_info_get, tx_byte_pool_performance_system_info_get, tx_byte_pool_prioritize, tx_byte_release
```

# tx\_byte\_pool\_performance\_info\_get

## Get byte pool performance information

### **Prototype**

```
UINT tx_byte_pool_performance_info_get(TX_BYTE_POOL *pool_ptr,

ULONG *allocates, ULONG *releases,

ULONG *fragments_searched, ULONG *merges, ULONG *splits,

ULONG *suspensions, ULONG *timeouts);
```

## **Description**

This service retrieves performance information about the specified memory byte pool.



The ThreadX library and application must be built with TX\_BYTE\_POOL\_ENABLE\_PERFORMANCE\_INFO defined for this service to return performance information.

#### **Parameters**

**pool ptr** Pointer to previously created memory byte pool.

**allocates** Pointer to destination for the number of allocate

requests performed on this pool.

releases Pointer to destination for the number of release

requests performed on this pool.

**fragments\_searched** Pointer to destination for the number of internal

memory fragments searched during allocation

requests on this pool.

**merges** Pointer to destination for the number of internal

memory blocks merged during allocation

requests on this pool.

**splits** Pointer to destination for the number of internal

memory blocks split (fragments) created during

allocation requests on this pool.

**suspensions** Pointer to destination for the number of thread

allocation suspensions on this pool.

timeouts Pointer to destination for the number of allocate

suspension timeouts on this pool.



Supplying a TX\_NULL for any parameter indicates the parameter is not required.

#### **Return Values**

TX\_SUCCESS (0x00) Successful byte pool performance get.

**TX\_PTR\_ERROR** (0x03) Invalid byte pool pointer.

**TX\_FEATURE\_NOT\_ENABLED** (0xFF) The system was not compiled

with performance information

enabled.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Example**

```
TX_BYTE_POOL my_pool;
ULONG
              fragments searched;
ULONG
              merges;
ULONG
              splits;
ULONG
              allocates;
ULONG
              releases;
ULONG
              suspensions;
ULONG
               timeouts;
/* Retrieve performance information on the previously created byte
   pool. */
status = tx byte pool performance info get(&my pool,
                      &fragments searched,
                      &merges, &splits,
                      &allocates, &releases,
                      &suspensions, &timeouts);
/* If status is TX SUCCESS the performance information was
   successfully retrieved. */
```

#### See Also

tx\_byte\_allocate, tx\_byte\_pool\_create, tx\_byte\_pool\_delete, tx\_byte\_pool\_info\_get, tx\_byte\_pool\_performance\_system\_info\_get, tx\_byte\_pool\_prioritize, tx\_byte\_release

# tx\_byte\_pool\_performance\_system\_info\_get

## Get byte pool system performance information

### **Prototype**

## **Description**

This service retrieves performance information about all memory byte pools in the system.



The ThreadX library and application must be built with TX\_BYTE\_POOL\_ENABLE\_PERFORMANCE\_INFO defined for this service to return performance information.

#### **Parameters**

**allocates** Pointer to destination for the number of allocate

requests performed on this pool.

**releases** Pointer to destination for the number of release

requests performed on this pool.

fragments\_searched Pointer to destination for the total number of

internal memory fragments searched during

allocation requests on all byte pools.

**merges** Pointer to destination for the total number of

internal memory blocks merged during allocation

requests on all byte pools.

**splits** Pointer to destination for the total number of

internal memory blocks split (fragments) created

during allocation requests on all byte pools.

**suspensions** Pointer to destination for the total number of

thread allocation suspensions on all byte pools.

timeouts Pointer to destination for the total number of

allocate suspension timeouts on all byte pools.



Supplying a TX\_NULL for any parameter indicates the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful byte pool performance get.

**TX\_FEATURE\_NOT\_ENABLED** (0xFF) The system was not compiled with performance information enabled.

#### **Allowed From**

Initialization, threads, timers, and ISRs

## **Example**

```
fragments searched;
ULONG
               merges;
ULONG
              splits;
              allocates;
ULONG
ULONG
               releases;
ULONG
               suspensions;
ULONG
               timeouts;
/* Retrieve performance information on all byte pools in the
   system. */
status =
tx byte pool performance system info get(&fragments searched,
                &merges, &splits, &allocates, &releases,
                &suspensions, &timeouts);
/* If status is TX SUCCESS the performance information was
   successfully retrieved. */
```

```
tx_byte_allocate, tx_byte_pool_create, tx_byte_pool_delete, tx_byte_pool_info_get, tx_byte_pool_performance_info_get, tx_byte_pool_prioritize, tx_byte_release
```

# tx\_byte\_pool\_prioritize

## Prioritize byte pool suspension list

### **Prototype**

UINT tx\_byte\_pool\_prioritize(TX BYTE POOL \*pool\_ptr)

## **Description**

This service places the highest priority thread suspended for memory on this pool at the front of the suspension list. All other threads remain in the same FIFO order they were suspended in.

#### **Parameters**

**pool\_ptr** Pointer to a memory pool control block.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful memory pool prioritize.

TX\_POOL\_ERROR (0x02) Invalid memory pool pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Preemption Possible**

No

#### See Also

tx\_byte\_allocate, tx\_byte\_pool\_create, tx\_byte\_pool\_delete, tx\_byte\_pool\_info\_get, tx\_byte\_pool\_performance\_info\_get, tx\_byte\_pool\_performance\_system\_info\_get, tx\_byte\_pool\_performance\_system\_info\_get, tx\_byte\_release

# tx\_byte\_release

## Release bytes back to memory pool

### **Prototype**

UINT tx\_byte\_release(VOID \*memory\_ptr)

## **Description**

This service releases a previously allocated memory area back to its associated pool. If there are one or more threads suspended waiting for memory from this pool, each suspended thread is given memory and resumed until the memory is exhausted or until there are no more suspended threads. This process of allocating memory to suspended threads always begins with the first thread suspended.



The application must prevent using the memory area after it is released.

#### **Parameters**

**memory\_ptr** Pointer to the previously allocated memory area.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful memory release.
TX_PTR_ERROR	(0x03)	Invalid memory area pointer.
TX_CALLER_ERROR	(0x13)	Invalid caller of this service.

#### Allowed From

Initialization and threads

## **Preemption Possible**

Yes

#### See Also

tx\_byte\_allocate, tx\_byte\_pool\_create, tx\_byte\_pool\_delete, tx\_byte\_pool\_info\_get, tx\_byte\_pool\_performance\_info\_get, tx\_byte\_pool\_performance\_system\_info\_get, tx\_byte\_pool\_prioritize

# tx\_event\_flags\_create

## Create event flags group

## **Prototype**

```
UINT tx_event_flags_create(TX_EVENT_FLAGS_GROUP *group_ptr,

CHAR *name ptr)
```

## **Description**

This service creates a group of 32 event flags. All 32 event flags in the group are initialized to zero. Each event flag is represented by a single bit.

#### **Parameters**

group_ptr	Pointer to an event flags group control block.
name_ptr	Pointer to the name of the event flags group.

#### **Return Values**

TX SUCCESS (0)	x00)	Successful event	group creation.
----------------	------	------------------	-----------------

TX\_GROUP\_ERROR (0x06) Invalid event group pointer. Either the

pointer is NULL or the event group is

already created.

TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

#### Allowed From

Initialization and threads

## **Preemption Possible**

No

## **Example**

```
tx_event_flags_delete, tx_event_flags_get, tx_event_flags_info_get, tx_event_flags_performance_info_get, tx_event_flags_performance_system_info_get, tx_event_flags_set, tx_event_flags_set_notify
```

# tx event flags delete

# Delete event flags group

### **Prototype**

UINT tx\_event\_flags\_delete(TX EVENT FLAGS GROUP \*group\_ptr)

## **Description**

This service deletes the specified event flags group. All threads suspended waiting for events from this group are resumed and given a TX\_DELETED return status.



The application must ensure that a set notify callback for this event flags group is completed (or disabled) before deleting the event flags group. In addition, the application must prevent all future use of a deleted event flags group.

#### **Parameters**

**group\_ptr** Pointer to a previously created event flags group.

#### **Return Values**

TX\_SUCCESS (0x00) Successful event flags group deletion.TX\_GROUP\_ERROR (0x06) Invalid event flags group pointer.TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

#### Allowed From

Threads

## **Preemption Possible**

Yes

## **Example**

```
TX_EVENT_FLAGS_GROUP my_event_flags_group;
UINT status;

/* Delete event flags group. Assume that the group has already been created with a call to tx_event_flags_create. */
status = tx_event_flags_delete(&my_event_flags_group);

/* If status equals TX_SUCCESS, the event flags group is deleted. */
```

```
tx_event_flags_create, tx_event_flags_get, tx_event_flags_info_get, tx_event_flags_performance_info_get, tx_event_flags_performance_system_info_get, tx_event_flags_set, tx_event_flags_set_notify
```

# tx\_event\_flags\_get

# Get event flags from event flags group

### **Prototype**

## **Description**

This service retrieves event flags from the specified event flags group. Each event flags group contains 32 event flags. Each flag is represented by a single bit. This service can retrieve a variety of event flag combinations, as selected by the input parameters.

#### **Parameters**

**group\_ptr** Pointer to a previously created event flags group.

**requested\_flags** 32-bit unsigned variable that represents the

requested event flags.

**get\_option** Specifies whether all or any of the requested

event flags are required. The following are valid

selections:

TX\_AND (0x02)
TX\_AND\_CLEAR (0x03)
TX\_OR (0x00)
TX\_OR\_CLEAR (0x01)

Selecting TX\_AND or TX\_AND\_CLEAR specifies that all event flags must be present in the group. Selecting TX\_OR or TX\_OR\_CLEAR specifies that any event flag is satisfactory. Event flags that satisfy the request are cleared (set to zero) if TX\_AND\_CLEAR or TX\_OR\_CLEAR are

specified.

actual\_flags\_ptr Pointer to destination of where the retrieved

event flags are placed. Note that the actual flags

obtained may contain flags that were not

requested.

#### wait\_option

Defines how the service behaves if the selected event flags are not set. The wait options are defined as follows:

TX_NO_WAIT	(0x00000000)
TX_WAIT_FOREVER	(0xFFFFFFF)
timeout value	(0x00000001
	through
	0xFFFFFFE)

Selecting TX\_NO\_WAIT results in an immediate return from this service regardless of whether or not it was successful. This is the only valid option if the service is called from a non-thread; e.g., Initialization, timer, or ISR.

Selecting TX\_WAIT\_FOREVER causes the calling thread to suspend indefinitely until the event flags are available.

Selecting a numeric value (1-0xFFFFFFE) specifies the maximum number of timer-ticks to stay suspended while waiting for the event flags.

## **Return Values**

TX_SUCCESS	(0x00)	Successful event flags get.
TX_DELETED	(0x01)	Event flags group was deleted while thread was suspended.
TX_NO_EVENTS	(0x07)	Service was unable to get the specified events within the specified time to wait.
TX_WAIT_ABORTED	(0x1A)	Suspension was aborted by another thread, timer, or ISR.
TX_GROUP_ERROR	(0x06)	Invalid event flags group pointer.
TX_PTR_ERROR	(0x03)	Invalid pointer for actual event flags.
TX_WAIT_ERROR	(0x04)	A wait option other than TX_NO_WAIT was specified on a call from a non-thread.
TX_OPTION_ERROR	(80x0)	Invalid get-option was specified.

#### **Allowed From**

Initialization, threads, timers, and ISRs

TX\_EVENT\_FLAGS\_GROUP my\_event\_flags\_group;

## **Preemption Possible**

Yes

## Example

```
tx_event_flags_create, tx_event_flags_delete, tx_event_flags_info_get, tx_event_flags_performance_info_get, tx_event_flags_performance_system_info_get, tx_event_flags_set, tx_event_flags_set notify
```

# THREAD

# tx\_event\_flags\_info\_get

# Retrieve information about event flags group

### **Prototype**

```
UINT tx_event_flags_info_get(TX_EVENT_FLAGS_GROUP *group_ptr,

CHAR **name, ULONG *current_flags,

TX_THREAD **first_suspended,

ULONG *suspended_count,

TX_EVENT_FLAGS_GROUP **next_group)
```

## **Description**

This service retrieves information about the specified event flags group.

#### **Parameters**

**group\_ptr** Pointer to an event flags group control block.

**name** Pointer to destination for the pointer to the event

flags group's name.

**current\_flags** Pointer to destination for the current set flags in

the event flags group.

**first suspended** Pointer to destination for the pointer to the thread

that is first on the suspension list of this event

flags group.

**suspended count** Pointer to destination for the number of threads

currently suspended on this event flags group.

**next\_group** Pointer to destination for the pointer of the next

created event flags group.

i

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful event group information retrieval.

TX\_GROUP\_ERROR (0x06) Invalid event group pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Preemption Possible**

No

# Example

```
tx_event_flags_create, tx_event_flags_delete, tx_event_flags_get, tx_event_flags_performance_info_get, tx_event_flags_performance_system_info_get, tx_event_flags_set, tx_event_flags_set_notify
```

# tx\_event\_flags\_performance info\_get

# Get event flags group performance information

### **Prototype**

## Description

This service retrieves performance information about the specified event flags group.



ThreadX library and application must be built with

**TX\_EVENT\_FLAGS\_ENABLE\_PERFORMANCE\_INFO** defined for this service to return performance information.

#### **Parameters**

**group\_ptr** Pointer to previously created event flags group.

**sets** Pointer to destination for the number of event

flags set requests performed on this group.

**gets** Pointer to destination for the number of event

flags get requests performed on this group.

**suspensions** Pointer to destination for the number of thread

event flags get suspensions on this group.

**timeouts** Pointer to destination for the number of event

flags get suspension timeouts on this group.



Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful event flags group performance get.
TX_PTR_ERROR	(0x03)	Invalid event flags group pointer.
TX_FEATURE_NOT_ENABLED	(0xFF)	The system was not compiled with performance information enabled.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Example**

```
TX_EVENT_FLAGS_GROUP my_event_flag_group;
ULONG
                    sets;
ULONG
                    gets;
                    suspensions;
ULONG
ULONG
                    timeouts;
/* Retrieve performance information on the previously created event
  flag group. */
status = tx event flags performance info get(&my event flag group,
                                    &sets, &gets, &suspensions,
                                    &timeouts);
/* If status is TX SUCCESS the performance information was successfully
  retrieved. */
```

```
tx_event_flags_create, tx_event_flags_delete, tx_event_flags_get, tx_event_flags_info_get, tx_event_flags_performance_system_info_get, tx_event_flags_set, tx_event_flags_set_notify
```

# tx\_event\_flags\_performance\_system\_info\_get

## Retrieve performance system information

### **Prototype**

## **Description**

This service retrieves performance information about all event flags groups in the system.

ThreadX library and application must be built with

**TX\_EVENT\_FLAGS\_ENABLE\_PERFORMANCE\_INFO** defined for this service to return performance information.

#### **Parameters**

**sets** Pointer to destination for the total number of

event flags set requests performed on all groups.

**gets** Pointer to destination for the total number of

event flags get requests performed on all groups.

**suspensions** Pointer to destination for the total number of

thread event flags get suspensions on all groups.

timeouts Pointer to destination for the total number of

event flags get suspension timeouts on all

groups.

i

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful event flags system performance get.

TX FEATURE NOT ENABLED (0xFF) The system was not

compiled with performance

information enabled.

### **Allowed From**

Initialization, threads, timers, and ISRs

## **Example**

```
tx_event_flags_create, tx_event_flags_delete, tx_event_flags_get, tx_event_flags_info_get, tx_event_flags_performance_info_get, tx_event_flags_set, tx_event_flags_set_notify
```

# tx\_event\_flags\_set

# Set event flags in an event flags group

## **Prototype**

## **Description**



This service sets or clears event flags in an event flags group, depending upon the specified set-option. All suspended threads whose event flags request is now satisfied are resumed.

#### **Parameters**

**group\_ptr** Pointer to the previously created event flags

group control block.

flags\_to\_set Specifies the event flags to set or clear based

upon the set option selected.

**set\_option** Specifies whether the event flags specified are

ANDed or ORed into the current event flags of the group. The following are valid selections:

TX\_AND (0x02) TX OR (0x00)

Selecting TX\_AND specifies that the specified event flags are **AND**ed into the current event flags in the group. This option is often used to clear event flags in a group. Otherwise, if TX\_OR is specified, the specified event flags are **OR**ed with the current event in the group.

#### **Return Values**

**TX SUCCESS** (0x00) Successful event flags set.

TX\_GROUP\_ERROR (0x06) Invalid pointer to event flags group.

TX OPTION ERROR (0x08) Invalid set-option specified.

### **Allowed From**

Initialization, threads, timers, and ISRs

## **Preemption Possible**

Yes

## Example

#### See Also

tx\_event\_flags\_create, tx\_event\_flags\_delete, tx\_event\_flags\_get, tx\_event\_flags\_info\_get, tx\_event\_flags\_performance\_info\_get, tx\_event\_flags\_performance\_system\_info\_get, tx\_event\_flags\_set\_notify

# tx\_event\_flags\_set\_notify

## Notify application when event flags are set

## **Prototype**

## **Description**

This service registers a notification callback function that is called whenever one or more event flags are set in the specified event flags group. The processing of the notification callback is defined by the application.



Note: the application's event flags set notification callback is not allowed to call any ThreadX API with a suspension option.

#### **Parameters**

**group\_ptr** Pointer to previously created event flags group.

**events set notify** Pointer to application's event flags set

notification function. If this value is TX NULL,

notification is disabled.

#### Return Values

**TX\_SUCCESS** (0x00) Successful registration of event

flags set notification.

TX\_GROUP\_ERROR (0x06) Invalid event flags group pointer.

TX\_FEATURE\_NOT\_ENABLED(0xFF) The system was compiled with

notification capabilities disabled.

#### Allowed From

Initialization, threads, timers, and ISRs

## Example

#### See Also

tx\_event\_flags\_create, tx\_event\_flags\_delete, tx\_event\_flags\_get, tx\_event\_flags\_info\_get, tx\_event\_flags\_performance\_info\_get, tx\_event\_flags\_performance\_system\_info\_get, tx\_event\_flags\_set

# tx\_interrupt\_control

# Enable and disable interrupts

#### **Prototype**

UINT tx\_interrupt\_control(UINT new\_posture)

## **Description**

This service enables or disables interrupts as specified by the input parameter **new\_posture**.



If this service is called from an application thread, the interrupt posture remains part of that thread's context. For example, if the thread calls this routine to disable interrupts and then suspends, when it is resumed, interrupts are disabled again.



This service should not be used to enable interrupts during initialization! Doing so could cause unpredictable results.

#### **Parameters**

new posture

This parameter specifies whether interrupts are disabled or enabled. Legal values include TX\_INT\_DISABLE and TX\_INT\_ENABLE. The actual values for these parameters are port specific. In addition, some processing architectures might support additional interrupt disable postures. Please see the readme\_threadx.txt information supplied on the distribution disk for more details.

#### Return Values

previous posture

This service returns the previous interrupt posture to the caller. This allows users of the service to restore the previous posture after interrupts are disabled.

## **Allowed From**

Threads, timers, and ISRs

# **Preemption Possible**

No

## Example

```
UINT my_old_posture;
/* Lockout interrupts */
my_old_posture = tx_interrupt_control(TX_INT_DISABLE);
/* Perform critical operations that need interrupts
    locked-out... */
/* Restore previous interrupt lockout posture. */
tx interrupt control(my old posture);
```

### See Also

None

# tx\_mutex\_create

#### Create mutual exclusion mutex

### **Prototype**

```
UINT tx_mutex_create(TX_MUTEX *mutex_ptr,

CHAR *name ptr, UINT priority inherit)
```

## **Description**

This service creates a mutex for inter-thread mutual exclusion for resource protection.

#### **Parameters**

mutex\_ptrpointer to a mutex control block.name\_ptrPointer to the name of the mutex.

**priority\_inherit** Specifies whether or not this mutex supports

priority inheritance. If this value is TX\_INHERIT, then priority inheritance is supported. However, if

TX\_NO\_INHERIT is specified, priority inheritance is not supported by this mutex.

### **Return Values**

**TX\_SUCCESS** (0x00) Successful mutex creation.

TX\_MUTEX\_ERROR (0x1C) Invalid mutex pointer. Either the

pointer is NULL or the mutex is already

created.

TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

TX\_INHERIT\_ERROR (0x1F) Invalid priority inherit parameter.

#### Allowed From

Initialization and threads

# **Preemption Possible**

Nο



# **Example**

```
tx_mutex_delete, tx_mutex_get, tx_mutex_info_get, tx_mutex_performance_info_get, tx_mutex_performance_system_info_get, tx_mutex_prioritize, tx_mutex_put
```

# tx\_mutex\_delete

### Delete mutual exclusion mutex

### **Prototype**

UINT tx\_mutex\_delete(TX MUTEX \*mutex\_ptr)

## **Description**

This service deletes the specified mutex. All threads suspended waiting for the mutex are resumed and given a TX\_DELETED return status.



It is the application's responsibility to prevent use of a deleted mutex.

#### **Parameters**

**mutex\_ptr** Pointer to a previously created mutex.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful mutex deletion.

TX\_MUTEX\_ERROR (0x1C) Invalid mutex pointer.

TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

#### Allowed From

**Threads** 

# **Preemption Possible**

Yes

## **Example**

```
tx_mutex_create, tx_mutex_get, tx_mutex_info_get,
tx_mutex_performance_info_get,
tx_mutex_performance_system_info_get, tx_mutex_prioritize,
tx_mutex_put
```

# tx\_mutex\_get

## Obtain ownership of mutex

## **Prototype**

UINT tx\_mutex\_get(TX MUTEX \*mutex\_ptr, ULONG wait\_option)

## **Description**

This service attempts to obtain exclusive ownership of the specified mutex. If the calling thread already owns the mutex, an internal counter is incremented and a successful status is returned.

If the mutex is owned by another thread and this thread is higher priority and priority inheritance was specified at mutex create, the lower priority thread's priority will be temporarily raised to that of the calling thread.



The priority of the lower priority thread owning a mutex with priority-inheritance should never be modified by an external thread during mutex ownership.

#### **Parameters**

mutex\_ptr

wait\_option

Pointer to a previously created mutex.

Defines how the service behaves if the mutex is already owned by another thread. The wait options are defined as follows:

**TX\_NO\_WAIT** (0x00000000) **TX\_WAIT\_FOREVER** (0xFFFFFFF)

timeout value (0x00000001 through

0xFFFFFFE)

Selecting TX\_NO\_WAIT results in an immediate return from this service regardless of whether or not it was successful. This is the only valid option if the service is called from Initialization.

Selecting TX\_WAIT\_FOREVER causes the calling thread to suspend indefinitely until the mutex is available.

Selecting a numeric value (1-0xFFFFFFE) specifies the maximum number of timer-ticks to stay suspended while waiting for the mutex.



#### **Return Values**

TX_SUCCESS	(0x00)	Successful mutex get operation.
TX_DELETED	(0x01)	Mutex was deleted while thread was suspended.
TX_NOT_AVAILABLE	(0x1D)	Service was unable to get ownership of the mutex within the specified time to wait.
TX_WAIT_ABORTED	(0x1A)	Suspension was aborted by another thread, timer, or ISR.
TX_MUTEX_ERROR	(0x1C)	Invalid mutex pointer.
TX_WAIT_ERROR	(0x04)	A wait option other than TX_NO_WAIT was specified on a call from a non-thread.
TX_CALLER_ERROR	(0x13)	Invalid caller of this service.

#### **Allowed From**

Initialization and threads and timers

## **Preemption Possible**

Yes

## **Example**

```
tx_mutex_create, tx_mutex_delete, tx_mutex_info_get, tx_mutex_performance_info_get, tx_mutex_performance_system_info_get, tx_mutex_prioritize, tx_mutex_put
```

# tx mutex info get

#### Retrieve information about mutex

## **Prototype**

```
UINT tx_mutex_info_get(TX_MUTEX *mutex_ptr, CHAR **name,

ULONG *count, TX_THREAD **owner,

TX_THREAD **first_suspended,

ULONG *suspended count, TX MUTEX **next mutex)
```

## **Description**

This service retrieves information from the specified mutex.

#### **Parameters**

**mutex\_ptr** Pointer to mutex control block.

**name** Pointer to destination for the pointer to the

mutex's name.

**count** Pointer to destination for the ownership count of

the mutex.

**owner** Pointer to destination for the owning thread's

pointer.

**first\_suspended** Pointer to destination for the pointer to the thread

that is first on the suspension list of this mutex.

**suspended\_count** Pointer to destination for the number of threads

currently suspended on this mutex.

**next mutex** Pointer to destination for the pointer of the next

created mutex.

not

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

**TX SUCCESS** (0x00) Successful mutex information

retrieval.

TX MUTEX ERROR (0x1C) Invalid mutex pointer.

#### **Allowed From**

Initialization, threads, timers, and ISRs

## **Preemption Possible**

No

## **Example**

```
tx_mutex_create, tx_mutex_delete, tx_mutex_get, tx_mutex_performance_info_get, tx_mutex_performance_system_info_get, tx_mutex_prioritize, tx_mutex_put
```

# tx\_mutex\_performance\_info\_get

## Get mutex performance information

### **Prototype**

## **Description**

This service retrieves performance information about the specified mutex.

The ThreadX library and application must be built with TX\_MUTEX\_ENABLE\_PERFORMANCE\_INFO defined for this service to return performance information.

#### **Parameters**

**mutex\_ptr** Pointer to previously created mutex.

**puts** Pointer to destination for the number of put

requests performed on this mutex.

**gets** Pointer to destination for the number of get

requests performed on this mutex.

**suspensions** Pointer to destination for the number of thread

mutex get suspensions on this mutex.

**timeouts** Pointer to destination for the number of mutex

get suspension timeouts on this mutex.

**inversions** Pointer to destination for the number of thread

priority inversions on this mutex.

**inheritances** Pointer to destination for the number of thread

priority inheritance operations on this mutex.

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

information enabled.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful mutex performance get.
TX_PTR_ERROR	(0x03)	Invalid mutex pointer.
TX_FEATURE_NOT_ENABLED	(0xFF)	The system was not compiled with performance

#### Allowed From

Initialization, threads, timers, and ISRs

## **Example**

```
TX_MUTEX my_mutex; ULONG puts;
ULONG
              gets;
suspensions;
ULONG
              timeouts;
ULONG
              inversions;
ULONG
               inheritances;
ULONG
/* Retrieve performance information on the previously created
   mutex. */
status = tx_mutex_performance_info_get(&my_mutex_ptr, &puts, &gets,
                &suspensions, &timeouts, &inversions,
                &inheritances);
/\star If status is TX SUCCESS the performance information was
   successfully retrieved. */
```

```
tx_mutex_create, tx_mutex_delete, tx_mutex_get, tx_mutex_info_get, tx_mutex_performance_system_info_get, tx_mutex_prioritize, tx_mutex_put
```

# tx\_mutex\_performance\_system\_info\_get

# Get mutex system performance information

## **Prototype**

## Description

This service retrieves performance information about all the mutexes in the system.

\_*i*\_

The ThreadX library and application must be built with TX\_MUTEX\_ENABLE\_PERFORMANCE\_INFO defined for this service to return performance information.

#### **Parameters**

**puts** Pointer to destination for the total number of put

requests performed on all mutexes.

**gets** Pointer to destination for the total number of get

requests performed on all mutexes.

**suspensions** Pointer to destination for the total number of

thread mutex get suspensions on all mutexes.

**timeouts** Pointer to destination for the total number of

mutex get suspension timeouts on all mutexes.

**inversions** Pointer to destination for the total number of

thread priority inversions on all mutexes.

**inheritances** Pointer to destination for the total number of

thread priority inheritance operations on all

mutexes.

*i* [

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful mutex system performance get.

TX\_FEATURE\_NOT\_ENABLED (0xFF) The system was not

compiled with performance information enabled.

#### **Allowed From**

Initialization, threads, timers, and ISRs

## **Example**

```
ULONG
              puts;
ULONG
              gets;
ULONG
              suspensions;
ULONG
              timeouts;
ULONG
               inversions;
              inheritances;
ULONG
/* Retrieve performance information on all previously created
   mutexes. */
status = tx_mutex_performance_system_info_get(&puts, &gets,
                &suspensions, &timeouts,
                &inversions, &inheritances);
/* If status is TX SUCCESS the performance information was
   successfully retrieved. */
```

#### See Also

tx\_mutex\_create, tx\_mutex\_delete, tx\_mutex\_get, tx\_mutex\_info\_get, tx\_mutex\_performance\_info\_get, tx\_mutex\_prioritize, tx\_mutex\_put

# tx\_mutex\_prioritize

# Prioritize mutex suspension list

### **Prototype**

UINT tx\_mutex\_prioritize(TX MUTEX \*mutex\_ptr)

## **Description**

This service places the highest priority thread suspended for ownership of the mutex at the front of the suspension list. All other threads remain in the same FIFO order they were suspended in.

#### **Parameters**

**mutex\_ptr** Pointer to the previously created mutex.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful mutex prioritize.

TX\_MUTEX\_ERROR (0x1C) Invalid mutex pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

# **Preemption Possible**

No

# **Example**

```
tx_mutex_create, tx_mutex_delete, tx_mutex_get, tx_mutex_info_get, tx_mutex_performance_info_get, tx_mutex_performance_system_info_get, tx_mutex_put
```

# tx\_mutex\_put

# Release ownership of mutex

### **Prototype**

UINT tx\_mutex\_put(TX MUTEX \*mutex\_ptr)

## **Description**

This service decrements the ownership count of the specified mutex. If the ownership count is zero, the mutex is made available.



If priority inheritance was selected during mutex creation, the priority of the releasing thread will be restored to the priority it had when it originally obtained ownership of the mutex. Any other priority changes made to the releasing thread during ownership of the mutex may be undone.

#### **Parameters**

**mutex\_ptr** Pointer to the previously created mutex.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful mutex release.
TX_NOT_OWNED	(0x1E)	Mutex is not owned by caller.
TX_MUTEX_ERROR	(0x1C)	Invalid pointer to mutex.
TX CALLER ERROR	(0x13)	Invalid caller of this service

#### Allowed From

Initialization and threads and timers

# **Preemption Possible**

Yes

## **Example**

### See Also

tx\_mutex\_create, tx\_mutex\_delete, tx\_mutex\_get, tx\_mutex\_info\_get, tx\_mutex\_performance\_info\_get, tx\_mutex\_performance\_system\_info\_get, tx\_mutex\_prioritize

# tx queue create

## Create message queue

## **Prototype**

## Description

This service creates a message queue that is typically used for interthread communication. The total number of messages is calculated from the specified message size and the total number of bytes in the queue.



If the total number of bytes specified in the queue's memory area is not evenly divisible by the specified message size, the remaining bytes in the memory area are not used.

#### **Parameters**

queue\_ptr Pointer to a message queue control block. name\_ptr Pointer to the name of the message queue. Specifies the size of each message in the queue. message\_size Message sizes range from 1 32-bit word to 16 32-bit words. Valid message size options are numerical values from 1 through 16, inclusive. queue\_start Starting address of the message queue. The starting address must be aligned to the size of the ULONG data type. queue\_size Total number of bytes available for the message queue.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful message queue creation.
TX_QUEUE_ERROR	(0x09)	Invalid message queue pointer. Either the pointer is NULL or the queue is already created.
TX_PTR_ERROR	(0x03)	Invalid starting address of the message queue.
TX_SIZE_ERROR	(0x05)	Size of message queue is invalid.
TX_CALLER_ERROR	(0x13)	Invalid caller of this service.

#### Allowed From

Initialization and threads

### **Preemption Possible**

No

## **Example**

```
tx_queue_delete, tx_queue_flush, tx_queue_front_send, tx_queue_info_get, tx_queue_performance_info_get, tx_queue_performance_system_info_get, tx_queue_prioritize, tx_queue_receive, tx_queue_send, tx_queue_send_notify
```

# tx\_queue\_delete

### Delete message queue

### **Prototype**

UINT tx\_queue\_delete(TX QUEUE \*queue\_ptr)

### **Description**

This service deletes the specified message queue. All threads suspended waiting for a message from this queue are resumed and given a TX\_DELETED return status.



The application must ensure that any send notify callback for this queue is completed (or disabled) before deleting the queue. In addition, the application must prevent any future use of a deleted queue.

It is also the application's responsibility to manage the memory area associated with the queue, which is available after this service completes.

#### **Parameters**

**queue\_ptr** Pointer to a previously created message queue.

#### Return Values

TX\_SUCCESS (0x00) Successful message queue deletion.TX\_QUEUE\_ERROR (0x09) Invalid message queue pointer.TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

#### Allowed From

Threads

# **Preemption Possible**

Yes

```
tx_queue_create, tx_queue_flush, tx_queue_front_send, tx_queue_info_get, tx_queue_performance_info_get, tx_queue_performance_system_info_get, tx_queue_prioritize, tx_queue_receive, tx_queue_send, tx_queue_send_notify
```

# tx\_queue\_flush

### Empty messages in message queue

### **Prototype**

UINT tx\_queue\_flush(TX QUEUE \*queue\_ptr)

### **Description**

This service deletes all messages stored in the specified message queue. If the queue is full, messages of all suspended threads are discarded. Each suspended thread is then resumed with a return status that indicates the message send was successful. If the queue is empty, this service does nothing.

#### **Parameters**

**queue\_ptr** Pointer to a previously created message queue.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful message queue flush. TX\_QUEUE\_ERROR (0x09) Invalid message queue pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Preemption Possible**

Yes

```
tx_queue_create, tx_queue_delete, tx_queue_front_send, tx_queue_info_get, tx_queue_performance_info_get, tx_queue_performance_system_info_get, tx_queue_prioritize, tx_queue_receive, tx_queue_send, tx_queue_send_notify
```

# tx queue front send

### Send message to the front of queue

### **Prototype**

### **Description**

This service sends a message to the front location of the specified message queue. The message is **copied** to the front of the queue from the memory area specified by the source pointer.

#### **Parameters**

**queue\_ptr** Pointer to a message queue control block.

**source ptr** Pointer to the message.

wait\_option Defines how the service behaves if the message queue is full. The wait options are defined as

follows:

TX\_NO\_WAIT (0x00000000)

TX\_WAIT\_FOREVER (0xFFFFFFFF)
timeout value (0x00000001 through 0xFFFFFFFE)

Selecting TX\_NO\_WAIT results in an immediate return from this service regardless of whether or not it was successful. This is the only valid option if the service is called from a non-thread; e.g., Initialization, timer, or ISR.

Selecting TX\_WAIT\_FOREVER causes the calling thread to suspend indefinitely until there is room in the queue.

Selecting a numeric value (1-0xFFFFFFE) specifies the maximum number of timer-ticks to stay suspended while waiting for room in the queue.

### **Return Values**

**TX\_SUCCESS** (0x00) Successful sending of message.



TX_DELETED	(0x01)	Message queue was deleted while thread was suspended.
TX_QUEUE_FULL	(0x0B)	Service was unable to send message because the queue was full for the duration of the specified time to wait.
TX_WAIT_ABORTED	(0x1A)	Suspension was aborted by another thread, timer, or ISR.
TX_QUEUE_ERROR	(0x09)	Invalid message queue pointer.
TX_PTR_ERROR	(0x03)	Invalid source pointer for message.
TX_WAIT_ERROR	(0x04)	A wait option other than TX_NO_WAIT was specified on a call from a non-thread.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Preemption Possible**

Yes

# **Example**

```
tx_queue_create, tx_queue_delete, tx_queue_flush, tx_queue_info_get, tx_queue_performance_info_get, tx_queue_performance_system_info_get, tx_queue_prioritize, tx_queue_receive, tx_queue_send, tx_queue_send_notify
```

# tx queue info get

### Retrieve information about queue

### **Prototype**

### **Description**

This service retrieves information about the specified message queue.

#### **Parameters**

**queue\_ptr** Pointer to a previously created message queue.

**name** Pointer to destination for the pointer to the

queue's name.

**enqueued** Pointer to destination for the number of

messages currently in the queue.

available\_storage Pointer to destination for the number of

messages the queue currently has space for.

**first\_suspended** Pointer to destination for the pointer to the thread

that is first on the suspension list of this queue.

**suspended\_count** Pointer to destination for the number of threads

currently suspended on this queue.

**next\_queue** Pointer to destination for the pointer of the next

created queue.

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful queue information get.

TX QUEUE ERROR (0x09) Invalid message queue pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Preemption Possible**

No

#### **Example**

```
tx_queue_create, tx_queue_delete, tx_queue_flush, tx_queue_front_send, tx_queue_performance_info_get, tx_queue_performance_system_info_get, tx_queue_prioritize, tx_queue_receive, tx_queue_send, tx_queue_send_notify
```

# tx\_queue\_performance\_info\_get

### Get queue performance information

### **Prototype**

```
UINT tx_queue_performance_info_get(TX_QUEUE *queue_ptr,

ULONG *messages_sent, ULONG *messages_received,

ULONG *empty_suspensions, ULONG *full_suspensions,

ULONG *full errors, ULONG *timeouts);
```

### Description

This service retrieves performance information about the specified queue.



The ThreadX library and application must be built with TX\_QUEUE\_ENABLE\_PERFORMANCE\_INFO defined for this service to return performance information.

#### **Parameters**

**queue\_ptr** Pointer to previously created queue.

messages\_sent Pointer to destination for the number of send

requests performed on this queue.

**messages\_received** Pointer to destination for the number of receive

requests performed on this queue.

**empty\_suspensions** Pointer to destination for the number of queue

empty suspensions on this queue.

**full\_suspensions** Pointer to destination for the number of queue

full suspensions on this queue.

**full\_errors** Pointer to destination for the number of queue

full errors on this queue.

**timeouts** Pointer to destination for the number of thread

suspension timeouts on this gueue.



Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful queue performance
		aet.

**TX\_PTR\_ERROR** (0x03) Invalid queue pointer.

TX\_FEATURE\_NOT\_ENABLED(0xFF) The system was not compiled with performance information

with performance information enabled.

#### Allowed From

Initialization, threads, timers, and ISRs

### Example

```
TX QUEUE
              my queue;
ULONG
              messages sent;
              messages_received;
empty_suspensions;
ULONG
ULONG
ULONG
              full suspensions;
               full errors;
ULONG
ULONG
                timeouts;
/* Retrieve performance information on the previously created
   queue. */
status = tx_queue_performance_info_get(&my_queue, &messages_sent,
             &messages received, &empty suspensions,
             &full suspensions, &full errors, &timeouts);
/\star If status is TX SUCCESS the performance information was
   successfully retrieved. */
```

```
tx_queue_create, tx_queue_delete, tx_queue_flush, tx_queue_front_send, tx_queue_info_get, tx_queue_performance_system_info_get, tx_queue_prioritize, tx_queue_receive, tx_queue_send, tx_queue_send_notify
```

# tx\_queue\_performance\_system\_info\_get

### Get queue system performance information

### **Prototype**

### Description

This service retrieves performance information about all the queues in the system.

 $i\int_{t_0}^{t_1}$ 

The ThreadX library and application must be built with TX\_QUEUE\_ENABLE\_PERFORMANCE\_INFO defined for this service to return performance information.

#### **Parameters**

messages\_sent Pointer to destination for the total number of

send requests performed on all queues.

messages\_received Pointer to destination for the total number of

receive requests performed on all queues.

**empty\_suspensions** Pointer to destination for the total number of

queue empty suspensions on all queues.

**full\_suspensions** Pointer to destination for the total number of

queue full suspensions on all queues.

**full errors** Pointer to destination for the total number of

queue full errors on all queues.

**timeouts** Pointer to destination for the total number of

thread suspension timeouts on all queues.

i

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful queue system
		performance get.

TX\_FEATURE\_NOT\_ENABLED (0xFF) The system was not

compiled with performance information enabled.

#### Allowed From

Initialization, threads, timers, and ISRs

### **Example**

```
ULONG
              messages sent;
ULONG
              messages received;
ULONG
              empty suspensions;
              full suspensions;
ULONG
ULONG
               full errors;
ULONG
               timeouts;
/* Retrieve performance information on all previously created
   queues. */
status = tx queue performance system info get(&messages sent,
                &messages received, &empty suspensions,
                &full suspensions, &full errors, &timeouts);
/\star If status is TX SUCCESS the performance information was
   successfully retrieved. */
```

```
tx_queue_create, tx_queue_delete, tx_queue_flush, tx_queue_front_send, tx_queue_info_get, tx_queue_performance_info_get, tx_queue_prioritize, tx_queue_receive, tx_queue_send, tx_queue_send_notify
```

# tx\_queue\_prioritize

# Prioritize queue suspension list

### **Prototype**

UINT tx\_queue\_prioritize(TX QUEUE \*queue\_ptr)

### **Description**

This service places the highest priority thread suspended for a message (or to place a message) on this queue at the front of the suspension list. All other threads remain in the same FIFO order they were suspended in.

#### **Parameters**

**queue\_ptr** Pointer to a previously created message queue.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful queue prioritize.

TX\_QUEUE\_ERROR (0x09) Invalid message queue pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

# **Preemption Possible**

No

```
tx_queue_create, tx_queue_delete, tx_queue_flush, tx_queue_front_send, tx_queue_info_get, tx_queue_performance_info_get, tx_queue_performance_system_info_get, tx_queue_receive, tx_queue_send, tx_queue_send_notify
```

# tx\_queue\_receive

### Get message from message queue

### **Prototype**

```
UINT tx_queue_receive(TX_QUEUE *queue_ptr,

VOID *destination ptr, ULONG wait option)
```

### Description

This service retrieves a message from the specified message queue. The retrieved message is **copied** from the queue into the memory area specified by the destination pointer. That message is then removed from the queue.



The specified destination memory area must be large enough to hold the message; i.e., the message destination pointed to by **destination\_ptr** must be at least as large as the message size for this queue. Otherwise, if the destination is not large enough, memory corruption occurs in the following memory area.

#### **Parameters**

queue\_ptr

destination ptr

wait option

Pointer to a previously created message queue.

Location of where to copy the message.

Defines how the service behaves if the message queue is empty. The wait options are defined as follows:

TX\_NO\_WAIT
TX\_WAIT\_FOREVER
timeout value

(0x00000000) (0xFFFFFFF) (0x00000001 through 0xFFFFFFFE)

Selecting TX\_NO\_WAIT results in an immediate return from this service regardless of whether or not it was successful. This is the only valid option if the service is called from a non-thread; e.g., Initialization, timer, or ISR.

Selecting TX\_WAIT\_FOREVER causes the calling thread to suspend indefinitely until a message is available.



Selecting a numeric value (1-0xFFFFFFE) specifies the maximum number of timer-ticks to stay suspended while waiting for a message.

### **Return Values**

TX_SUCCESS	(0x00)	Successful retrieval of message.
TX_DELETED	(0x01)	Message queue was deleted while thread was suspended.
TX_QUEUE_EMPTY	(0x0A)	Service was unable to retrieve a message because the queue was empty for the duration of the specified time to wait.
TX_WAIT_ABORTED	(0x1A)	Suspension was aborted by another thread, timer, or ISR.
TX_QUEUE_ERROR	(0x09)	Invalid message queue pointer.
TX_PTR_ERROR	(0x03)	Invalid destination pointer for message.
TX_WAIT_ERROR	(0x04)	A wait option other than TX_NO_WAIT was specified on a call from a non-thread.

#### Allowed From

Initialization, threads, timers, and ISRs

# **Preemption Possible**

Yes

```
tx_queue_create, tx_queue_delete, tx_queue_flush, tx_queue_front_send, tx_queue_info_get, tx_queue_performance_info_get, tx_queue_performance_system_info_get, tx_queue_prioritize, tx_queue_send, tx_queue_send_notify
```

# THREAD

# tx\_queue\_send

### Send message to message queue

### **Prototype**

### Description

This service sends a message to the specified message queue. The sent message is **copied** to the queue from the memory area specified by the source pointer.

#### **Parameters**

**queue\_ptr** Pointer to a previously created message queue.

**source\_ptr** Pointer to the message.

wait\_option Defines how the service behaves if the message queue is full. The wait options are defined as

follows:

 TX\_NO\_WAIT
 (0x00000000)

 TX\_WAIT\_FOREVER
 (0xFFFFFFFF)

 timeout value
 (0x00000001 through 0xFFFFFFE)

Selecting TX\_NO\_WAIT results in an immediate return from this service regardless of whether or not it was successful. This is the only valid option if the service is called from a non-thread; e.g., Initialization, timer, or ISR.

Selecting TX\_WAIT\_FOREVER causes the calling thread to suspend indefinitely until there is room in the queue.

Selecting a numeric value (1-0xFFFFFFE) specifies the maximum number of timer-ticks to stay suspended while waiting for room in the queue.

### Return Values

**TX\_SUCCESS** (0x00) Successful sending of message.

THREAD X User Guide

TX_DELETED	(0x01)	Message queue was deleted while thread was suspended.
TX_QUEUE_FULL	(0x0B)	Service was unable to send message because the queue was full for the duration of the specified time to wait.
TX_WAIT_ABORTED	(0x1A)	Suspension was aborted by another thread, timer, or ISR.
TX_QUEUE_ERROR	(0x09)	Invalid message queue pointer.
TX_PTR_ERROR	(0x03)	Invalid source pointer for message.
TX_WAIT_ERROR	(0x04)	A wait option other than TX_NO_WAIT was specified on a call from a non-thread.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Preemption Possible**

Yes

# Example

```
tx_queue_create, tx_queue_delete, tx_queue_flush, tx_queue_front_send, tx_queue_info_get, tx_queue_performance_info_get, tx_queue_performance_system_info_get, tx_queue_prioritize, tx_queue_receive, tx_queue_send_notify
```

# tx\_queue\_send\_notify

# Notify application when message is sent to queue

### **Prototype**

# **Description**

This service registers a notification callback function that is called whenever a message is sent to the specified queue. The processing of the notification callback is defined by the application.



Note: the application's queue send notification callback is not allowed to call any ThreadX API with a suspension option.

#### **Parameters**

**queue\_ptr** Pointer to previously created queue.

**queue\_send\_notify** Pointer to application's queue send notification

function. If this value is TX\_NULL, notification is

disabled.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful registration of

queue send notification.

TX\_QUEUE\_ERROR (0x09) Invalid queue pointer.

TX\_FEATURE\_NOT\_ENABLED(0xFF) The system was compiled with notification capabilities

disabled.

#### Allowed From

Initialization, threads, timers, and ISRs

```
tx_queue_create, tx_queue_delete, tx_queue_flush, tx_queue_front_send, tx_queue_info_get, tx_queue_performance_info_get, tx_queue_performance_system_info_get, tx_queue_prioritize, tx_queue_receive, tx_queue_send
```

# tx\_semaphore\_ceiling\_put

# Place an instance in counting semaphore with ceiling

### **Prototype**

### Description

This service puts an instance into the specified counting semaphore, which in reality increments the counting semaphore by one. If the counting semaphore's current value is greater than or equal to the specified ceiling, the instance will not be put and a TX\_CEILING\_EXCEEDED error will be returned.

#### **Parameters**

semaphore_ptr	Pointer to previously created semaphore.
ceiling	Maximum limit allowed for the semaphore (valid
	values range from 1 through 0xFFFFFFF).

### **Return Values**

TX_SUCCESS	(0x00)	Successful semaphore ceiling put.
TX_CEILING_EXCEEDED	(0x21)	Put request exceeds ceiling.
TX_INVALID_CEILING	(0x22)	An invalid value of zero was supplied for ceiling.
TX_SEMAPHORE_ERROR	(0x0C)	Invalid semaphore pointer.

### Allowed From

Initialization, threads, timers, and ISRs

```
TX_SEMAPHORE my_semaphore;

/* Increment the counting semaphore "my_semaphore" but make sure that it never exceeds 7 as specified in the call. */
status = tx_semaphore_ceiling_put(&my_semaphore, 7);

/* If status is TX_SUCCESS the semaphore count has been incremented. */
```

```
tx_semaphore_create, tx_semaphore_delete, tx_semaphore_get, tx_semaphore_info_get, tx_semaphore_performance_info_get, tx_semaphore_performance_system_info_get, tx_semaphore_prioritize, tx_semaphore_put, tx_semaphore_put_notify
```

# tx\_semaphore\_create

# Create counting semaphore

### **Prototype**

```
UINT tx_semaphore_create(TX_SEMAPHORE *semaphore_ptr,
CHAR *name ptr, ULONG initial count)
```

### **Description**

This service creates a counting semaphore for inter-thread synchronization. The initial semaphore count is specified as an input parameter.

#### **Parameters**

semaphore\_ptrPointer to a semaphore control block.name\_ptrPointer to the name of the semaphore.

initial\_count Specifies the initial count for this semaphore.

Legal values range from 0x00000000 through

0xFFFFFFF.

#### Return Values

**TX\_SUCCESS** (0x00) Successful semaphore

creation.

TX\_SEMAPHORE\_ERROR (0x0C) Invalid semaphore pointer.

Either the pointer is NULL or the semaphore is already

created.

TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

#### Allowed From

Initialization and threads

## **Preemption Possible**

No

#### See Also

tx\_semaphore\_ceiling\_put, tx\_semaphore\_delete, tx\_semaphore\_get, tx\_semaphore\_info\_get, tx\_semaphore\_performance\_info\_get, tx\_semaphore\_performance\_system\_info\_get, tx\_semaphore\_prioritize, tx\_semaphore\_put, tx\_semaphore\_put\_notify

# tx\_semaphore\_delete

### Delete counting semaphore

## **Prototype**

UINT tx\_semaphore\_delete(TX SEMAPHORE \*semaphore\_ptr)

## Description

This service deletes the specified counting semaphore. All threads suspended waiting for a semaphore instance are resumed and given a TX\_DELETED return status.



The application must ensure that a put notify callback for this semaphore is completed (or disabled) before deleting the semaphore. In addition, the application must prevent all future use of a deleted semaphore.

#### **Parameters**

**semaphore\_ptr** Pointer to a previously created semaphore.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful counting semaphore deletion.
TX_SEMAPHORE_ERROR	(0x0C)	Invalid counting semaphore pointer.
TX_CALLER_ERROR	(0x13)	Invalid caller of this service.

#### Allowed From

Threads

## **Preemption Possible**

Yes

#### See Also

tx\_semaphore\_ceiling\_put, tx\_semaphore\_create, tx\_semaphore\_get, tx\_semaphore\_info\_get, tx\_semaphore\_performance\_info\_get, tx\_semaphore\_performance\_system\_info\_get, tx\_semaphore\_prioritize, tx\_semaphore\_put, tx\_semaphore\_put\_notify

# tx\_semaphore\_get

### Get instance from counting semaphore

### **Prototype**

### **Description**

This service retrieves an instance (a single count) from the specified counting semaphore. As a result, the specified semaphore's count is decreased by one.

#### **Parameters**

semaphore ptr

Pointer to a previously created counting

semaphore.

wait\_option

Defines how the service behaves if there are no instances of the semaphore available; i.e., the semaphore count is zero. The wait options are defined as follows:

TX\_NO\_WAIT
TX\_WAIT\_FOREVER
timeout value

(0x00000000) (0xFFFFFFFF) (0x00000001 through 0xFFFFFFFE)

Selecting TX\_NO\_WAIT results in an immediate return from this service regardless of whether or not it was successful. This is the only valid option if the service is called from a non-thread; e.g., initialization, timer, or ISR.

Selecting TX\_WAIT\_FOREVER causes the calling thread to suspend indefinitely until a semaphore instance is available.

Selecting a numeric value (1-0xFFFFFFE) specifies the maximum number of timer-ticks to stay suspended while waiting for a semaphore instance.

## **Return Values**

TX\_SUCCESS

(0x00)

Successful retrieval of a semaphore instance.



TX_DELETED	(0x01)	Counting semaphore was deleted while thread was suspended.
TX_NO_INSTANCE	(0x0D)	Service was unable to retrieve an instance of the counting semaphore (semaphore count is zero within the specified time to wait).
TX_WAIT_ABORTED	(0x1A)	Suspension was aborted by another thread, timer, or ISR.
TX_SEMAPHORE_ERROR	(0x0C)	Invalid counting semaphore pointer.
TX_WAIT_ERROR	(0x04)	A wait option other than TX_NO_WAIT was specified on a call from a non-thread.

#### Allowed From

Initialization, threads, timers, and ISRs

# **Preemption Possible**

Yes

### **Example**

```
TX_SEMAPHORE my_semaphore;
UINT status;

/* Get a semaphore instance from the semaphore
   "my_semaphore." If the semaphore count is zero,
   suspend until an instance becomes available.
   Note that this suspension is only possible from
   application threads. */
status = tx_semaphore_get(&my_semaphore, TX_WAIT_FOREVER);

/* If status equals TX_SUCCESS, the thread has obtained
   an instance of the semaphore. */
```

#### See Also

tx\_semaphore\_ceiling\_put, tx\_semaphore\_create, tx\_semahore\_delete, tx\_semaphore\_info\_get, tx\_semaphore\_performance\_info\_get, tx\_semaphore\_put, tx\_semaphore\_put\_notify

# tx\_semaphore\_info\_get

# Retrieve information about semaphore

### **Prototype**

### Description

This service retrieves information about the specified semaphore.

#### **Parameters**

**semaphore\_ptr** Pointer to semaphore control block.

**name** Pointer to destination for the pointer to the

semaphore's name.

**current value** Pointer to destination for the current

semaphore's count.

**first suspended** Pointer to destination for the pointer to the thread

that is first on the suspension list of this

semaphore.

**suspended count** Pointer to destination for the number of threads

currently suspended on this semaphore.

**next\_semaphore** Pointer to destination for the pointer of the next

created semaphore.

i

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful semaphore
		information retrieval.

TX\_SEMAPHORE\_ERROR (0x0C) Invalid semaphore pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

### **Preemption Possible**

No

# Example

```
tx_semaphore_ceiling_put, tx_semaphore_create, tx_semaphore_delete, tx_semaphore_get, tx_semaphore_performance_info_get, tx_semaphore_performance_system_info_get, tx_semaphore_prioritize, tx_semaphore_put, tx_semaphore_put_notify
```

# tx\_semaphore\_performance\_info\_get

# Get semaphore performance information

### **Prototype**

### Description

This service retrieves performance information about the specified semaphore.



Note: The ThreadX library and application must be built with TX\_SEMAPHORE\_ENABLE\_PERFORMANCE\_INFO defined for this service to return performance information.

#### **Parameters**

**semaphore\_ptr** Pointer to previously created semaphore.

**puts** Pointer to destination for the number of put

requests performed on this semaphore.

**gets** Pointer to destination for the number of get

requests performed on this semaphore.

**suspensions** Pointer to destination for the number of thread

suspensions on this semaphore.

**timeouts** Pointer to destination for the number of thread

suspension timeouts on this semaphore.



Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful semaphore performance get.
TX_PTR_ERROR	(0x03)	Invalid semaphore pointer.
TX_FEATURE_NOT_ENABLED	(0xFF)	The system was not compiled with performance

information enabled.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Example**

```
tx_semaphore_ceiling_put, tx_semaphore_create, tx_semaphore_delete, tx_semaphore_get, tx_semaphore_info_get, tx_semaphore_performance_system_info_get, tx_semaphore_prioritize, tx_semaphore_put, tx_semaphore_put_notify
```

# tx\_semaphore\_performance\_system\_info\_get

### Get semaphore system performance information

### **Prototype**

### **Description**

This service retrieves performance information about all the semaphores in the system.



The ThreadX library and application must be built with TX\_SEMAPHORE\_ENABLE\_PERFORMANCE\_INFO defined for this service to return performance information

#### **Parameters**

**puts** Pointer to destination for the total number of put

requests performed on all semaphores.

**gets** Pointer to destination for the total number of get

requests performed on all semaphores.

**suspensions** Pointer to destination for the total number of

thread suspensions on all semaphores.

**timeouts** Pointer to destination for the total number of

thread suspension timeouts on all semaphores.



Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

TX\_SUCCESS (0x00) Successful semaphore system performance get.

TX\_FEATURE\_NOT\_ENABLED (0xFF)

The system was not compiled with performance information enabled.

#### Allowed From

Initialization, threads, timers, and ISRs

## Example

```
tx_semaphore_ceiling_put, tx_semaphore_create, tx_semaphore_delete, tx_semaphore_get, tx_semaphore_info_get, tx_semaphore_performance_info_get, tx_semaphore_prioritize, tx_semaphore_put, tx_semaphore_put_notify
```

## tx\_semaphore\_prioritize

## Prioritize semaphore suspension list

#### **Prototype**

UINT tx\_semaphore\_prioritize(TX SEMAPHORE \*semaphore\_ptr)

## **Description**

This service places the highest priority thread suspended for an instance of the semaphore at the front of the suspension list. All other threads remain in the same FIFO order they were suspended in.

#### **Parameters**

**semaphore\_ptr** Pointer to a previously created semaphore.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful semaphore

prioritize.

TX\_SEMAPHORE\_ERROR (0x0C) Invalid counting semaphore

pointer.

#### **Allowed From**

Initialization, threads, timers, and ISRs

## **Preemption Possible**

No

```
TX_SEMAPHORE my_semaphore;
UINT status;

/* Ensure that the highest priority thread will receive
    the next instance of this semaphore. */
status = tx_semaphore_prioritize(&my_semaphore);

/* If status equals TX_SUCCESS, the highest priority
    suspended thread is at the front of the list. The
    next tx_semaphore_put call made to this semaphore will
    wake up this thread. */
```

#### See Also

tx\_semaphore\_create, tx\_semaphore\_delete, tx\_semaphore\_get, tx\_semaphore\_info\_get, tx\_semaphore\_put

## tx\_semaphore\_put

## Place an instance in counting semaphore

#### **Prototype**

UINT tx\_semaphore\_put(TX SEMAPHORE \*semaphore\_ptr)

## **Description**

This service puts an instance into the specified counting semaphore, which in reality increments the counting semaphore by one.



If this service is called when the semaphore is all ones (OxFFFFFFF), the new put operation will cause the semaphore to be reset to zero.

#### **Parameters**

**semaphore\_ptr** Pointer to the previously created counting

semaphore control block.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful semaphore put.

TX\_SEMAPHORE\_ERROR (0x0C) Invalid pointer to counting

semaphore.

#### Allowed From

Initialization, threads, timers, and ISRs

## **Preemption Possible**

Yes

#### See Also

tx\_semaphore\_ceiling\_put, tx\_semaphore\_create, tx\_semaphore\_delete, tx\_semaphore\_info\_get, tx\_semaphore\_performance\_info\_get, tx\_semaphore\_performance\_system\_info\_get, tx\_semaphore\_prioritize, tx\_semaphore\_get, tx\_semaphore\_put\_notify

## tx\_semaphore\_put\_notify

## Notify application when semaphore is put

### **Prototype**

## **Description**

This service registers a notification callback function that is called whenever the specified semaphore is put. The processing of the notification callback is defined by the application.



Note: the application's semaphore notification callback is not allowed to call any ThreadX API with a suspension option.

#### **Parameters**

**semaphore\_ptr** Pointer to previously created semaphore.

**semaphore\_put\_notify** Pointer to application's semaphore put

notification function. If this value is TX\_NULL,

notification is disabled.

#### **Return Values**

Allowed From

TX\_SUCCESS (0x00) Successful registration of semaphore put notification.

TX\_SEMAPHORE\_ERROR (0x0C) Invalid semaphore pointer.

TX\_FEATURE\_NOT\_ENABLED (0xFF) The system was compiled with notification canabilities.

with notification capabilities disabled.

Initialization, threads, timers, and ISRs

```
tx_semaphore_ceiling_put, tx_semaphore_create, tx_semaphore_delete, tx_semaphore_get, tx_semaphore_info_get, tx_semaphore_performance_info_get, tx_semaphore_performance_system_info_get, tx_semaphore_prioritize, tx_semaphore_put
```

## tx thread create

## Create application thread

## **Prototype**

```
UINT tx_thread_create(TX_THREAD *thread_ptr,

CHAR *name_ptr, VOID (*entry_function)(ULONG),

ULONG entry_input, VOID *stack_start,

ULONG stack_size, UINT priority,

UINT preempt_threshold, ULONG time_slice,

UINT auto_start)
```

## Description

This service creates an application thread that starts execution at the specified task entry function. The stack, priority, preemption-threshold, and time-slice are among the attributes specified by the input parameters. In addition, the initial execution state of the thread is also specified.

#### **Parameters**

neters		
thread_ptr	Pointer to a thread control block.	
name_ptr	Pointer to the name of the thread.	
entry_function	Specifies the initial C function for thread execution. When a thread returns from this entry function, it is placed in a <i>completed</i> state and suspended indefinitely.	
entry_input	A 32-bit value that is passed to the thread's entry function when it first executes. The use for this input is determined exclusively by the application.	
stack_start	Starting address of the stack's memory area.	
stack_size	Number bytes in the stack memory area. The thread's stack area must be large enough to handle its worst-case function call nesting and local variable usage.	
priority	Numerical priority of thread. Legal values range from 0 through (TX_MAX_PRIORITES-1), where a value of 0 represents the highest priority.	



#### preempt\_threshold

Highest priority level (0 through (TX\_MAX\_PRIORITIES-1)) of disabled preemption. Only priorities higher than this level are allowed to preempt this thread. This value must be less than or equal to the specified priority. A value equal to the thread priority disables preemption-threshold.

time\_slice

Number of timer-ticks this thread is allowed to run before other ready threads of the same priority are given a chance to run. Note that using preemption-threshold disables time-slicing. Legal time-slice values range from 1 to 0xFFFFFFFF (inclusive). A value of TX\_NO\_TIME\_SLICE (a value of 0) disables time-slicing of this thread.



Using time-slicing results in a slight amount of system overhead. Since time-slicing is only useful in cases where multiple threads share the same priority, threads having a unique priority should not be assigned a time-slice.

auto\_start

Specifies whether the thread starts immediately or is placed in a suspended state. Legal options are **TX\_AUTO\_START** (0x01) and **TX\_DONT\_START** (0x00). If TX\_DONT\_START is specified, the application must later call tx thread resume in order for the thread to run.

## **Return Values**

TX_SUCCESS	(0x00)	Successful thread creation.
TX_THREAD_ERROR	(0x0E)	Invalid thread control pointer. Either the pointer is NULL or the thread is already created.
TX_PTR_ERROR	(0x03)	Invalid starting address of the entry point or the stack area is invalid, usually NULL.
TX_SIZE_ERROR	(0x05)	Size of stack area is invalid. Threads must have at least TX_MINIMUM_STACK bytes to execute.
TX_PRIORITY_ERROR	(0x0F)	Invalid thread priority, which is a value outside the range of (0 through (TX_MAX_PRIORITIES-1)).
TX_THRESH_ERROR	(0x18)	Invalid preemption- threshold specified. This value must be a valid priority less than or equal to the initial priority of the thread.
TX_START_ERROR	(0x10)	Invalid auto-start selection.
TX_CALLER_ERROR	(0x13)	Invalid caller of this service.

## **Allowed From**

Initialization and threads

## **Preemption Possible**

Yes

```
TX THREAD my thread;
ULNLI
                status;
/\star Create a thread of priority 15 whose entry point is
   "my thread entry". This thread's stack area is 1000
   bytes in size, starting at address 0x400000. The
   preemption-threshold is setup to allow preemption of threads
   with priorities ranging from 0 through 14. Time-slicing is
   disabled. This thread is automatically put into a ready
   condition. */
status = tx thread create (&my thread, "my thread name",
                my thread entry, 0x1234,
                (VOID *) 0x400000, 1000,
                15, 15, TX NO TIME SLICE,
                TX AUTO START);
/* If status equals TX SUCCESS, my thread is ready
   for execution! */
. . .
/* Thread's entry function. When "my thread" actually
   begins execution, control is transferred to this
   function. */
VOID my thread entry (ULONG initial input)
     /* When we get here, the value of initial input is
       0x1234. See how this was specified during
       creation. */
     /* The real work of the thread, including calls to
       other function should be called from here! */
     /* When this function returns, the corresponding
       thread is placed into a "completed" state. */
```

```
tx_thread_delete, tx_thread_entry_exit_notify, tx_thread_identify, tx_thread_info_get, tx_thread_performance_info_get, tx_thread_performance_system_info_get, tx_thread_preemption_change, tx_thread_priority_change, tx_thread_relinquish, tx_thread_reset, tx_thread_resume, tx_thread_sleep, tx_thread_stack_error_notify, tx_thread_suspend, tx_thread_terminate, tx_thread_time_slice_change, tx_thread_wait_abort
```

## tx thread delete

## Delete application thread

### **Prototype**

UINT tx\_thread\_delete(TX THREAD \*thread\_ptr)

## **Description**

This service deletes the specified application thread. Since the specified thread must be in a terminated or completed state, this service cannot be called from a thread attempting to delete itself.



It is the application's responsibility to manage the memory area associated with the thread's stack, which is available after this service completes. In addition, the application must prevent use of a deleted thread.

#### **Parameters**

thread\_ptr Pointer to a previously created application

thread.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful thread deletion.

TX THREAD ERROR (0x0E) Invalid application thread pointer.

**TX\_DELETE\_ERROR** (0x11) Specified thread is not in a terminated

or completed state.

TX CALLER ERROR (0x13) Invalid caller of this service.

#### Allowed From

Threads and timers

## **Preemption Possible**

No

#### See Also

```
tx_thread_create, tx_thread_entry_exit_notify, tx_thread_identify,
```

tx thread info get, tx thread performance info get,

tx\_thread\_performance\_system\_info\_get,

tx thread preemption change, tx thread priority change,

tx thread relinquish, tx thread reset, tx thread resume,

tx thread sleep, tx thread stack error notify, tx thread suspend,

tx\_thread\_terminate, tx\_thread\_time\_slice\_change, tx\_thread\_wait\_abort

## tx\_thread\_entry\_exit\_notify

## Notify application upon thread entry and exit

## **Prototype**

## Description

This service registers a notification callback function that is called whenever the specified thread is entered or exits. The processing of the notification callback is defined by the application.



Note: the application's thread entry/exit notification callback is not allowed to call any ThreadX API with a suspension option.

#### **Parameters**

**thread\_ptr** Pointer to previously created thread.

entry\_exit\_notify Pointer to application's thread entry/exit

notification function. The second parameter to the entry/exit notification function designates if an

entry or exit is present. The value

TX\_THREAD\_ENTRY (0x00) indicates the thread was entered, while the value TX\_THREAD\_EXIT (0x01) indicates the thread was exited. If this value

is TX\_NULL, notification is disabled.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful registration of the

thread entry/exit notification

function.

TX\_THREAD\_ERROR (0x0E) Invalid thread pointer.

TX\_FEATURE\_NOT\_ENABLED(0xFF) The system was compiled with

notification capabilities disabled.

#### Allowed From

Initialization, threads, timers, and ISRs



```
tx_thread_create, tx_thread_delete, tx_thread_entry_exit_notify, tx_thread_identify, tx_thread_info_get, tx_thread_performance_info_get, tx_thread_performance_system_info_get, tx_thread_preemption_change, tx_thread_priority_change, tx_thread_relinquish, tx_thread_reset, tx_thread_resume, tx_thread_sleep, tx_thread_stack_error_notify, tx_thread_suspend, tx_thread_terminate, tx_thread_time_slice_change, tx_thread_wait_abort
```

## tx\_thread\_identify

## Retrieves pointer to currently executing thread

## **Prototype**

TX\_THREAD\* tx\_thread\_identify(VOID)

## **Description**

This service returns a pointer to the currently executing thread. If no thread is executing, this service returns a null pointer.

TX\_NULL.



If this service is called from an ISR, the return value represents the thread running prior to the executing interrupt handler.

#### **Parameters**

None

#### **Return Values**

thread pointer

Pointer to the currently executing thread. If no thread is executing, the return value is

#### Allowed From

Threads and ISRs

## **Preemption Possible**

Nο

```
TX_THREAD *my_thread_ptr;

/* Find out who we are! */
my_thread_ptr = tx_thread_identify();

/* If my_thread_ptr is non-null, we are currently executing from that thread or an ISR that interrupted that thread.
   Otherwise, this service was called from an ISR when no thread was running when the interrupt occurred. */
```

- tx\_thread\_create, tx\_thread\_delete, tx\_thread\_entry\_exit\_notify,
- tx\_thread\_info\_get, tx\_thread\_performance\_info\_get,
- tx\_thread\_performance\_system\_info\_get,
- tx\_thread\_preemption\_change, tx\_thread\_priority\_change,
- tx\_thread\_relinquish, tx\_thread\_reset, tx\_thread\_resume,
- tx thread sleep, tx thread stack error notify, tx thread suspend,
- tx\_thread\_terminate, tx\_thread\_time\_slice\_change, tx\_thread\_wait\_abort

## tx\_thread\_info\_get

### Retrieve information about thread

### **Prototype**

## Description

This service retrieves information about the specified thread.

#### **Parameters**

**thread ptr** Pointer to thread control block.

**name** Pointer to destination for the pointer to the

thread's name.

**state** Pointer to destination for the thread's current

execution state. Possible values are as follows:

TX READY (0x00)TX COMPLETED (0x01)TX\_TERMINATED (0x02)TX SUSPENDED (0x03)TX\_SLEEP (0x04)TX\_QUEUE\_SUSP (0x05)TX\_SEMAPHORE\_SUSP (0x06)TX\_EVENT\_FLAG (0x07)TX\_BLOCK\_MEMORY (80x0)TX\_BYTE\_MEMORY (0x09)TX MUTEX SUSP (0x0D)

**run\_count** Pointer to destination for the thread's run count.

**priority** Pointer to destination for the thread's priority.

preemption\_threshold Pointer to destination for the thread's

preemption-threshold.

**time slice** Pointer to destination for the thread's time-slice.

**next thread** Pointer to destination for next created thread

pointer.

**suspended\_thread** Pointer to destination for pointer to next thread in

suspension list.

i

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful thread information

retrieval.

TX\_THREAD\_ERROR (0x0E) Invalid thread control pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

### **Preemption Possible**

No

## **Example**

```
TX THREAD
               my thread;
                *name;
CHAR
UINT
                state;
ULONG
               run count;
               priority;
UINT
UINT
               preemption threshold;
UINT
                time slice;
TX_THREAD *next_thread;
TX_THREAD *suspended_thread;
UINT
                status;
   /* Retrieve information about the previously created
      thread "my thread." */
   status = tx thread info get(&my thread, &name,
                       &state, &run count,
                       &priority, &preemption threshold,
                       &time slice, &next thread, &suspended thread);
   /* If status equals TX SUCCESS, the information requested is
      valid. */
```

- tx\_thread\_create, tx\_thread\_delete, tx\_thread\_entry\_exit\_notify,
- tx thread identify, tx thread performance info get,
- tx\_thread\_performance\_system\_info\_get,
- tx thread preemption change, tx thread priority change,
- tx\_thread\_relinquish, tx\_thread\_reset, tx\_thread\_resume,
- tx\_thread\_sleep, tx\_thread\_stack\_error\_notify, tx\_thread\_suspend,
- tx\_thread\_terminate, tx\_thread\_time\_slice\_change, tx\_thread\_wait\_abort

## THREAD

## tx\_thread\_performance\_info\_get

## Get thread performance information

### **Prototype**

```
UINT tx_thread_performance_info_get(TX_THREAD *thread_ptr,

ULONG *resumptions, ULONG *suspensions,

ULONG *solicited_preemptions, ULONG *interrupt_preemptions,

ULONG *priority_inversions, ULONG *time_slices,

ULONG *relinquishes, ULONG *timeouts, ULONG *wait_aborts,

TX THREAD **last preempted by);
```

## Description

This service retrieves performance information about the specified thread.

<u>i</u>]

The ThreadX library and application must be built with TX\_THREAD\_ENABLE\_PERFORMANCE\_INFO defined in order for

this service to return performance information.

#### **Parameters**

**thread\_ptr** Pointer to previously created thread.

**resumptions** Pointer to destination for the number of

resumptions of this thread.

**suspensions** Pointer to destination for the number of

suspensions of this thread.

**solicited\_preemptions** Pointer to destination for the number of

preemptions as a result of a ThreadX API

service call made by this thread.

interrupt\_preemptions Pointer to destination for the number of

preemptions of this thread as a result of

interrupt processing.

**priority\_inversions** Pointer to destination for the number of priority

inversions of this thread.

time slices Pointer to destination for the number of time-

slices of this thread.

**relinquishes** Pointer to destination for the number of thread

relinquishes performed by this thread.

**timeouts** Pointer to destination for the number of

suspension timeouts on this thread.

wait\_aborts Pointer to destination for the number of wait

aborts performed on this thread.

last\_preempted\_by Pointer to destination for the thread pointer that

last preempted this thread.

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

TX\_SUCCESS (0x00) Successful thread

performance get.

**TX\_PTR\_ERROR** (0x03) Invalid thread pointer.

**TX\_FEATURE\_NOT\_ENABLED** (0xFF) The system was not

compiled with performance

information enabled.

#### **Allowed From**

Initialization, threads, timers, and ISRs

```
TX_THREAD my_thread;
ULONG
               resumptions;
              suspensions;
solicited_preemptions;
interrupt_preemptions;
priority_inversions;
time_slices;
ULONG
ULONG
ULONG
ULONG
ULONG
ULONG
               relinquishes;
ULONG
               timeouts;
ULONG
               wait aborts;
TX_THREAD *last_preempted_by;
/* Retrieve performance information on the previously created
   thread. */
status = tx thread performance info get(&my thread, &resumptions,
                 &suspensions,
                 &solicited preemptions, &interrupt preemptions,
                 &priority inversions, &time slices,
                 &relinquishes, &timeouts,
                 &wait aborts, &last preempted by);
/* If status is TX SUCCESS the performance information was
   successfully retrieved. */
```

#### See Also

```
tx_thread_create, tx_thread_delete, tx_thread_entry_exit_notify,
```

tx\_thread\_identify, tx\_thread\_info\_get,

tx thread performance system info get,

tx thread preemption change, tx thread priority change,

tx thread relinquish, tx thread reset, tx thread resume,

tx\_thread\_sleep, tx\_thread\_stack\_error\_notify, tx\_thread\_suspend,

tx thread terminate, tx thread time slice change, tx thread wait abort

# THREAD

## tx\_thread\_performance\_system\_info\_get

## Get thread system performance information

## **Prototype**

## Description

This service retrieves performance information about all the threads in the system.

 $i \int$ 

The ThreadX library and application must be built with

TX\_THREAD\_ENABLE\_PERFORMANCE\_INFO defined in order for this service to return performance information.

#### **Parameters**

**resumptions** Pointer to destination for the total number of

thread resumptions.

**suspensions** Pointer to destination for the total number of

thread suspensions.

solicited\_preemptions Pointer to destination for the total number of

thread preemptions as a result of a thread

calling a ThreadX API service.

**interrupt\_preemptions** Pointer to destination for the total number of

thread preemptions as a result of interrupt

processing.

**priority\_inversions** Pointer to destination for the total number of

thread priority inversions.

**time\_slices** Pointer to destination for the total number of

thread time-slices.

**relinquishes** Pointer to destination for the total number of

thread relinguishes.

**timeouts** Pointer to destination for the total number of

thread suspension timeouts.

wait\_aborts Pointer to destination for the total number of

thread wait aborts.

**non\_idle\_returns** Pointer to destination for the number of times a

thread returns to the system when another

thread is ready to execute.

**idle\_returns** Pointer to destination for the number of times a

thread returns to the system when no other thread is ready to execute (idle system).

i

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful thread system

performance get.

**TX\_FEATURE\_NOT\_ENABLED** (0xFF) The system was not

compiled with performance

information enabled.

#### Allowed From

Initialization, threads, timers, and ISRs

```
ULONG
              resumptions;
ULONG
              suspensions;
              solicited preemptions;
ULONG
              interrupt preemptions;
ULONG
              priority inversions;
ULONG
ULONG
               time slices;
ULONG
              relinguishes;
ULONG
              timeouts;
             wait_aborts;
ULONG
ULONG
              non idle returns;
               idle returns;
ULONG
/* Retrieve performance information on all previously created
  thread. */
status = tx thread performance system info get(&resumptions,
                &suspensions,
                &solicited preemptions, &interrupt preemptions,
                &priority inversions, &time slices, &relinquishes,
                &timeouts, &wait aborts, &non idle returns,
                &idle returns);
/\star If status is TX SUCCESS the performance information was
   successfully retrieved. */
```

- tx\_thread\_create, tx\_thread\_delete, tx\_thread\_entry\_exit\_notify,
- tx\_thread\_identify, tx\_thread\_info\_get, tx\_thread\_performance\_info\_get,
- tx\_thread\_preemption\_change, tx\_thread\_priority\_change,
- tx\_thread\_relinquish, tx\_thread\_reset, tx\_thread\_resume,
- tx\_thread\_sleep, tx\_thread\_stack\_error\_notify, tx\_thread\_suspend,
- tx\_thread\_terminate, tx\_thread\_time\_slice\_change, tx\_thread\_wait\_abort

## T H R E A D

## tx\_thread\_preemption\_change

## Change preemption-threshold of application thread

## **Prototype**

```
UINT tx_thread_preemption_change(TX_THREAD *thread_ptr, UINT new threshold, UINT *old threshold)
```

## Description

This service changes the preemption-threshold of the specified thread. The preemption-threshold prevents preemption of the specified thread by threads equal to or less than the preemption-threshold value.

j J

Using preemption-threshold disables time-slicing for the specified thread.

#### **Parameters**

thread\_ptr Pointer to a previously created application

thread.

**new\_threshold** New preemption-threshold priority level (0

through (TX\_MAX\_PRIORITIES-1)).

old\_threshold Pointer to a location to return the previous

preemption-threshold.

## **Return Values**

**TX\_SUCCESS** (0x00) Successful preemption-threshold

change.

TX\_THREAD\_ERROR (0x0E) Invalid application thread pointer.

**TX\_THRESH\_ERROR** (0x18) Specified new preemption-threshold is

not a valid thread priority (a value other

than (0 through

(TX\_MAX\_PRIORITIES-1)) or is greater than (lower priority) than the

current thread priority.

TX\_PTR\_ERROR (0x03) Invalid pointer to previous preemption-

threshold storage location.

TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

#### Allowed From

Threads and timers

## **Preemption Possible**

Yes

## Example

```
tx_thread_create, tx_thread_delete, tx_thread_entry_exit_notify, tx_thread_identify, tx_thread_info_get, tx_thread_performance_info_get, tx_thread_performance_system_info_get, tx_thread_priority_change, tx_thread_relinquish, tx_thread_reset, tx_thread_resume, tx_thread_sleep, tx_thread_stack_error_notify, tx_thread_suspend, tx_thread_terminate, tx_thread_time_slice_change, tx_thread_wait_abort
```

## tx\_thread\_priority\_change

## Change priority of application thread

## **Prototype**

```
UINT tx_thread_priority_change(TX_THREAD *thread_ptr,

UINT new priority, UINT *old priority)
```

## Description

This service changes the priority of the specified thread. Valid priorities range from 0 through (TX\_MAX\_PRIORITES-1), where 0 represents the highest priority level.

\_*i*\_

The preemption-threshold of the specified thread is automatically set to the new priority. If a new threshold is desired, the **tx thread preemption change** service must be used after this call.

#### **Parameters**

thread\_ptr Pointer to a previously created application

thread.

**new\_priority** New thread priority level (0 through

(TX\_MAX\_PRIORITIES-1)).

**old priority** Pointer to a location to return the thread's

previous priority.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful priority change.

TX\_THREAD\_ERROR (0x0E) Invalid application thread pointer.

TX\_PRIORITY\_ERROR (0x0F) Specified new priority is not valid (a

value other than (0 through (TX\_MAX\_PRIORITIES-1)).

TX\_PTR\_ERROR (0x03) Invalid pointer to previous priority

storage location.

TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

#### Allowed From

Threads and timers

## **Preemption Possible**

Yes

## Example

```
tx_thread_create, tx_thread_delete, tx_thread_entry_exit_notify, tx_thread_identify, tx_thread_info_get, tx_thread_performance_info_get, tx_thread_performance_system_info_get, tx_thread_preemption_change, tx_thread_relinquish, tx_thread_reset, tx_thread_resume, tx_thread_sleep, tx_thread_stack_error_notify, tx_thread_suspend, tx_thread_terminate, tx_thread_time_slice_change, tx_thread_wait_abort
```

## tx\_thread\_relinquish

## Relinquish control to other application threads

### **Prototype**

VOID tx\_thread\_relinquish(VOID)

## **Description**

This service relinquishes processor control to other ready-to-run threads at the same or higher priority.



In addition to relinquishing control to threads of the same priority, this service also relinquishes control to the highest-priority thread prevented from execution because of the current thread's preemption-threshold setting.

#### **Parameters**

None

#### **Return Values**

None

#### Allowed From

Threads

## **Preemption Possible**

Yes

```
ULONG run counter 1 = 0;
ULONG run counter 2 = 0;
/* Example of two threads relinquishing control to
   each other in an infinite loop. Assume that
   both of these threads are ready and have the same
   priority. The run counters will always stay within one
   of each other. */
VOID my first thread(ULONG thread input)
    /* Endless loop of relinquish. */
    while(1)
       /* Increment the run counter. */
          run counter 1++;
       /* Relinquish control to other thread. */
       tx_thread_relinquish();
}
VOID my second thread (ULONG thread input)
    /* Endless loop of relinquish. */
    while(1)
    {
       /* Increment the run counter. */
       run counter 2++;
       /* Relinquish control to other thread. */
       tx thread relinquish();
```

```
tx_thread_create, tx_thread_delete, tx_thread_entry_exit_notify, tx_thread_identify, tx_thread_info_get, tx_thread_performance_info_get, tx_thread_performance_system_info_get, tx_thread_preemption_change, tx_thread_priority_change, tx_thread_reset, tx_thread_resume, tx_thread_sleep, tx_thread_stack_error_notify, tx_thread_suspend, tx_thread_terminate, tx_thread_time_slice_change, tx_thread_wait_abort
```

## tx\_thread\_reset

Reset thread

## **Prototype**

UINT tx\_thread\_reset(TX THREAD \*thread ptr);

## **Description**

This service resets the specified thread to execute at the entry point defined at thread creation. The thread must be in either a **TX\_COMPLETED** or **TX\_TERMINATED** state for it to be reset

The thread must be resumed for it to execute again.

#### **Parameters**

**thread\_ptr** Pointer to a previously created thread.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful thread reset.

**TX\_NOT\_DONE** (0x20) Specified thread is not in a

TX\_COMPLETED or TX\_TERMINATED state.

TX\_THREAD\_ERROR (0x0E) Invalid thread pointer.

TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

#### **Allowed From**

Threads

```
TX_THREAD my_thread;

/* Reset the previously created thread "my_thread." */
status = tx_thread_reset(&my_thread);

/* If status is TX SUCCESS the thread is reset. */
```

- tx\_thread\_create, tx\_thread\_delete, tx\_thread\_entry\_exit\_notify,
- tx\_thread\_identify, tx\_thread\_info\_get, tx\_thread\_performance\_info\_get,
- tx thread preformance system info get,
- tx\_thread\_preemption\_change, tx\_thread\_priority\_change,
- tx thread relinquish, tx thread resume, tx thread sleep,
- tx thread stack error notify, tx thread suspend, tx thread terminate,
- tx\_thread\_time\_slice\_change, tx\_thread\_wait\_abort

## tx thread resume

### Resume suspended application thread

#### **Prototype**

UINT tx\_thread\_resume(TX THREAD \*thread\_ptr)

### **Description**

This service resumes or prepares for execution a thread that was previously suspended by a *tx\_thread\_suspend* call. In addition, this service resumes threads that were created without an automatic start.

#### **Parameters**

**thread\_ptr** Pointer to a suspended application thread.

#### Return Values

**TX\_SUCCESS** (0x00) Successful thread resume.

**TX\_SUSPEND\_LIFTED**(0x19) Previously set delayed suspension

was lifted.

TX THREAD ERROR (0x0E) Invalid application thread pointer.

**TX\_RESUME\_ERROR** (0x12) Specified thread is not suspended or

was previously suspended by a

service other than tx thread suspend.

#### Allowed From

Initialization, threads, timers, and ISRs

### **Preemption Possible**

Yes

- tx\_thread\_create, tx\_thread\_delete, tx\_thread\_entry\_exit\_notify,
- tx thread identify, tx thread info get, tx thread performance info get,
- tx thread performance system info get,
- tx thread preemption change, tx thread priority change,
- tx thread relinquish, tx thread reset, tx thread sleep,
- tx thread stack error notify, tx thread suspend, tx thread terminate,
- tx thread time slice change, tx thread wait abort

## tx thread sleep

## Suspend current thread for specified time

#### **Prototype**

UINT tx\_thread\_sleep(ULONG timer\_ticks)

### **Description**

This service causes the calling thread to suspend for the specified number of timer ticks. The amount of physical time associated with a timer tick is application specific. This service can be called only from an application thread.

#### **Parameters**

timer\_ticks The number of timer ticks to suspend the calling

application thread, ranging from 0 through 0xFFFFFFF. If 0 is specified, the service returns

immediately.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful thread sleep.

**TX\_WAIT\_ABORTED** (0x1A) Suspension was aborted by another

thread, timer, or ISR.

**TX\_CALLER\_ERROR** (0x13) Service called from a non-thread.

#### Allowed From

Threads

### **Preemption Possible**

Yes

```
UINT status;

/* Make the calling thread sleep for 100
    timer-ticks. */
status = tx_thread_sleep(100);

/* If status equals TX_SUCCESS, the currently running
    application thread slept for the specified number of
    timer-ticks. */
```

```
tx_thread_create, tx_thread_delete, tx_thread_entry_exit_notify, tx_thread_identify, tx_thread_info_get, tx_thread_performance_info_get, tx_thread_performance_system_info_get, tx_thread_preemption_change, tx_thread_priority_change, tx_thread_relinquish, tx_thread_reset, tx_thread_resume, tx_thread_stack_error_notify, tx_thread_suspend, tx_thread_terminate, tx_thread_time_slice_change, tx_thread_wait_abort
```

## tx\_thread\_stack\_error\_notify

### Register thread stack error notification callback

### **Prototype**

UINT tx\_thread\_stack\_error\_notify(VOID (\*error\_handler)(TX THREAD \*));

### **Description**

This service registers a notification callback function for handling thread stack errors. When ThreadX detects a thread stack error during execution, it will call this notification function to process the error. Processing of the error is completely defined by the application. Anything from suspending the violating thread to resetting the entire system may be done.



The ThreadX library must be built with

TX ENABLE STACK CHECKING defined in order for this service to return performance information.

#### Parameters 4 8 1

error\_handler

Pointer to application's stack error handling function. If this value is TX NULL, the notification

is disabled.

#### **Return Values**

TX SUCCESS

(0x00)

Successful thread reset.

**TX\_FEATURE\_NOT\_ENABLED**(0xFF) The system was not compiled with performance information

enabled.

#### Allowed From

Initialization, threads, timers, and ISRs

```
void my_stack_error_handler(TX_THREAD *thread_ptr);

/* Register the "my_stack_error_handler" function with ThreadX
    so that thread stack errors can be handled by the application. */
status = tx_thread_stack_error_notify(my_stack_error_handler);

/* If status is TX SUCCESS the stack error handler is registered.*/
```

```
tx_thread_create, tx_thread_delete, tx_thread_entry_exit_notify, tx_thread_identify, tx_thread_info_get, tx_thread_performance_info_get, tx_thread_preformance_system_info_get, tx_thread_preemption_change, tx_thread_priority_change, tx_thread_relinquish, tx_thread_reset, tx_thread_resume, tx_thread_sleep, tx_thread_suspend, tx_thread_terminate, tx_thread_time_slice_change, tx_thread_wait_abort
```

## tx thread suspend

### Suspend application thread

#### **Prototype**

UINT tx\_thread\_suspend(TX THREAD \*thread\_ptr)

### **Description**

This service suspends the specified application thread. A thread may call this service to suspend itself.



If the specified thread is already suspended for another reason, this suspension is held internally until the prior suspension is lifted. When that happens, this unconditional suspension of the specified thread is performed. Further unconditional suspension requests have no effect.

After being suspended, the thread must be resumed by *tx thread resume* to execute again.

#### **Parameters**

**thread\_ptr** Pointer to an application thread.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful thread suspend.
TX_THREAD_ERROR	(0x0E)	Invalid application thread pointer.
TX_SUSPEND_ERROR	(0x14)	Specified thread is in a terminated or completed state.
TX_CALLER_ERROR	(0x13)	Invalid caller of this service.

#### Allowed From

Initialization, threads, timers, and ISRs

### **Preemption Possible**

Yes



- tx\_thread\_create, tx\_thread\_delete, tx\_thread\_entry\_exit\_notify,
- tx thread identify, tx thread info get, tx thread performance info get,
- tx thread performance system info get,
- tx thread preemption change, tx thread priority change,
- tx thread relinquish, tx thread reset, tx thread resume,
- tx thread sleep, tx thread stack error notify, tx thread terminate,
- tx thread time slice change, tx thread wait abort

## tx thread terminate

### Terminates application thread

### **Prototype**

UINT tx\_thread\_terminate(TX THREAD \*thread\_ptr)

### **Description**

This service terminates the specified application thread regardless of whether the thread is suspended or not. A thread may call this service to terminate itself.



It is the application's responsibility to ensure that the thread is in a state suitable for termination. For example, a thread should not be terminated during critical application processing or inside of other middleware components where it could leave such processing in an unknown state.



After being terminated, the thread must be reset for it to execute again.

#### **Parameters**

thread\_ptr

Pointer to application thread.

#### Return Values

TX SUCCESS

(0x00)

Successful thread terminate.

TX\_THREAD\_ERROR (0x0E)

Invalid application thread pointer.

TX CALLER ERROR (0x13)

Invalid caller of this service.

#### Allowed From

Threads and timers

### **Preemption Possible**

Yes

```
tx_thread_create, tx_thread_delete, tx_thread_entry_exit_notify,
```

- tx\_thread\_identify, tx\_thread\_info\_get, tx\_thread\_performance\_info\_get,
- tx thread performance system info get,
- tx thread preemption change, tx thread priority change,
- tx thread relinquish, tx thread reset, tx thread resume,
- tx thread sleep, tx thread stack error notify, tx thread suspend,
- tx thread time slice change, tx thread wait abort

## tx\_thread\_time\_slice\_change

### Changes time-slice of application thread

#### **Prototype**

```
UINT tx_thread_time_slice_change(TX_THREAD *thread_ptr,

ULONG new time slice, ULONG *old time slice)
```

### Description

This service changes the time-slice of the specified application thread. Selecting a time-slice for a thread insures that it won't execute more than the specified number of timer ticks before other threads of the same or higher priorities have a chance to execute.

i

Using preemption-threshold disables time-slicing for the specified thread.

#### **Parameters**

**thread\_ptr** Pointer to application thread.

**new\_time\_slice** New time slice value. Legal values include

TX NO TIME SLICE and numeric values from

1 through 0xFFFFFFF.

**old\_time\_slice** Pointer to location for storing the previous time-

slice value of the specified thread.

#### **Return Values**

TX\_SUCCESS (0x00) Successful time-slice chance.

TX\_THREAD\_ERROR (0x0E) Invalid application thread pointer.

TX\_PTR\_ERROR (0x03) Invalid pointer to previous time-slice storage location.

TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

#### Allowed From

Threads and timers

#### **Preemption Possible**

No

### Example

```
my thread;
TX THREAD
              my old time slice;
ULONG
UINT
                status;
/* Change the time-slice of the thread associated with
   "my thread" to 20. This will mean that "my thread"
   can only run for 20 timer-ticks consecutively before
   other threads of equal or higher priority get a chance
   to run. */
status = tx thread time slice change (&my thread, 20,
                              &my old time slice);
/\!\!\!\!^{\star} If status equals TX_SUCCESS, the thread's time-slice
   has been changed to 20 and the previous time-slice is
   in "my old time slice." */
```

```
tx_thread_create, tx_thread_delete, tx_thread_entry_exit_notify, tx_thread_identify, tx_thread_info_get, tx_thread_performance_info_get, tx_thread_performance_system_info_get, tx_thread_preemption_change, tx_thread_priority_change, tx_thread_relinquish, tx_thread_reset, tx_thread_resume, tx_thread_sleep, tx_thread_stack_error_notify, tx_thread_suspend, tx_thread_terminate, tx_thread_wait_abort
```

## tx thread wait abort

### Abort suspension of specified thread

#### **Prototype**

UINT tx\_thread\_wait\_abort(TX THREAD \*thread\_ptr)

### **Description**

This service aborts sleep or any other object suspension of the specified thread. If the wait is aborted, a TX\_WAIT\_ABORTED value is returned from the service that the thread was waiting on.



This service does not release explicit suspension that is made by the tx\_thread\_suspend service.

#### **Parameters**

**thread\_ptr** Pointer to a previously created application thread.

#### Return Values

TX_SUCCESS	(0x00)	Successful thread wait abort.
TX_THREAD_ERROR	(0x0E)	Invalid application thread pointer.
TX_WAIT_ABORT_ERROR	(0x1B)	Specified thread is not in a waiting state.

#### Allowed From

Initialization, threads, timers, and ISRs

### **Preemption Possible**

Yes

#### See Also

tx\_thread\_create, tx\_thread\_delete, tx\_thread\_entry\_exit\_notify, tx\_thread\_identify, tx\_thread\_info\_get, tx\_thread\_performance\_info\_get, tx\_thread\_performance\_system\_info\_get, tx\_thread\_preemption\_change, tx\_thread\_priority\_change, tx\_thread\_relinquish, tx\_thread\_reset, tx\_thread\_resume, tx\_thread\_sleep, tx\_thread\_stack\_error\_notify, tx\_thread\_suspend, tx\_thread\_terminate, tx\_thread\_time\_slice\_change

## tx time get

### Retrieves the current time

### **Prototype**

ULONG tx time get(VOID)

### Description

This service returns the contents of the internal system clock. Each timertick increases the internal system clock by one. The system clock is set to zero during initialization and can be changed to a specific value by the service tx\_time\_set.



The actual time each timer-tick represents is application specific.

#### **Parameters**

None

#### **Return Values**

system clock ticks Value of the internal, free running, system clock.

#### Allowed From

Initialization, threads, timers, and ISRs

### **Preemption Possible**

No

```
ULONG current_time;
/* Pickup the current system time, in timer-ticks. */
current_time = tx_time_get();
/* Current time now contains a copy of the internal system clock. */
```

#### See Also

tx\_time\_set

## tx time set

### Sets the current time

#### **Prototype**

VOID tx\_time\_set(ULONG new\_time)

### **Description**

This service sets the internal system clock to the specified value. Each timer-tick increases the internal system clock by one.

 $i \int$ 

The actual time each timer-tick represents is application specific.

#### **Parameters**

new\_time

New time to put in the system clock, legal values range from 0 through 0xFFFFFFF.

#### **Return Values**

None

#### **Allowed From**

Threads, timers, and ISRs

### **Preemption Possible**

No

```
/* Set the internal system time to 0x1234. */
tx_time_set(0x1234);
/* Current time now contains 0x1234 until the next timer interrupt. */
```

### See Also

tx\_time\_get

## tx\_timer\_activate

## Activate application timer

### **Prototype**

UINT tx\_timer\_activate(TX TIMER \*timer\_ptr)

### Description

This service activates the specified application timer. The expiration routines of timers that expire at the same time are executed in the order they were activated.



Note that an expired one-shot timer must be reset via **tx\_timer\_change** before it can be activated again.

#### **Parameters**

**timer\_ptr** Pointer to a previously created application timer.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful application timer activation.
TX_TIMER_ERROR	(0x15)	Invalid application timer pointer.
TX_ACTIVATE_ERROR	(0x17)	Timer was already active or is a one-shot timer that has already expired.

#### Allowed From

Initialization, threads, timers, and ISRs

### **Preemption Possible**

Nο

```
tx_timer_change, tx_timer_create, tx_timer_deactivate, tx_timer_delete, tx_timer_info_get, tx_timer_performance_info_get, tx_timer_performance_system_info_get
```

## tx\_timer\_change

### Change application timer

#### **Prototype**

### Description

This service changes the expiration characteristics of the specified application timer. The timer must be deactivated prior to calling this service.

i J

A call to the **tx\_timer\_activate** service is required after this service in order to start the timer again.

#### **Parameters**

**timer ptr** Pointer to a timer control block.

initial\_ticks Specifies the initial number of ticks for timer

expiration. Legal values range from 1 through

0xFFFFFFF.

**reschedule ticks** Specifies the number of ticks for all timer

expirations after the first. A zero for this parameter makes the timer a *one-shot* timer. Otherwise, for periodic timers, legal values range

from 1 through 0xFFFFFFF.



Note that an expired one-shot timer must be reset via **tx\_timer\_change** before it can be activated again.

#### Return Values

**TX\_SUCCESS** (0x00) Successful application timer change.

TX\_TIMER\_ERROR (0x15) Invalid application timer pointer.

TX\_TICK\_ERROR (0x16) Invalid value (a zero) supplied for initial

ticks.

TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

#### Allowed From

Threads, timers, and ISRs

### **Preemption Possible**

No

### Example

```
tx_timer_activate, tx_timer_create, tx_timer_deactivate, tx_timer_delete, tx_timer_info_get, tx_timer_performance_info_get, tx_timer_performance_system_info_get
```

## tx\_timer\_create

### Create application timer

#### **Prototype**

### Description

This service creates an application timer with the specified expiration function and periodic.

#### **Parameters**

timer\_ptrPointer to a timer control blockname\_ptrPointer to the name of the timer.

**expiration\_function** Application function to call when the timer

expires.

**expiration\_input** Input to pass to expiration function when timer

expires.

initial\_ticks Specifies the initial number of ticks for timer

expiration. Legal values range from 1 through

0xFFFFFFF.

**reschedule\_ticks** Specifies the number of ticks for all timer

expirations after the first. A zero for this parameter makes the timer a *one-shot* timer. Otherwise, for periodic timers, legal values range

from 1 through 0xFFFFFFF.

i

Note after a one-shot timer expires, it must be reset via tx\_timer\_change before it can be activated again.

auto\_activate Determines if the timer is automatically activated

during creation. If this value is

**TX\_AUTO\_ACTIVATE** (0x01) the timer is made

active. Otherwise, if the value

**TX\_NO\_ACTIVATE** (0x00) is selected, the timer is created in a non-active state. In this case, a



subsequent **tx\_timer\_activate** service call is necessary to get the timer actually started.

#### **Return Values**

TX_SUCCESS	(0x00)	Successful application timer creation.
TX_TIMER_ERROR	(0x15)	Invalid application timer pointer. Either the pointer is NULL or the timer is already created.
TX_TICK_ERROR	(0x16)	Invalid value (a zero) supplied for initial ticks.
TX_ACTIVATE_ERROR	(0x17)	Invalid activation selected.
TX_CALLER_ERROR	(0x13)	Invalid caller of this service.

#### Allowed From

Initialization and threads

### **Preemption Possible**

No

### **Example**

```
tx_timer_activate, tx_timer_change, tx_timer_deactivate, tx_timer_delete, tx_timer_info_get, tx_timer_performance_info_get, tx_timer_performance_system_info_get
```

## tx\_timer\_deactivate

### Deactivate application timer

#### **Prototype**

UINT tx\_timer\_deactivate(TX TIMER \*timer\_ptr)

### **Description**

This service deactivates the specified application timer. If the timer is already deactivated, this service has no effect.

#### **Parameters**

**timer\_ptr** Pointer to a previously created application timer.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful application timer deactivation.

\_\_\_\_\_\_

TX\_TIMER\_ERROR (0x15) Invalid application timer pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

### **Preemption Possible**

No

```
tx_timer_activate, tx_timer_change, tx_timer_create, tx_timer_delete, tx_timer_info_get, tx_timer_performance_info_get, tx_timer_performance_system_info_get
```

## tx timer delete

### Delete application timer

#### **Prototype**

UINT tx\_timer\_delete(TX TIMER \*timer\_ptr)

### **Description**

This service deletes the specified application timer.



It is the application's responsibility to prevent use of a deleted timer.

#### **Parameters**

**timer\_ptr** Pointer to a previously created application timer.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful application timer deletion.

TX\_TIMER\_ERROR (0x15) Invalid application timer pointer.

TX\_CALLER\_ERROR (0x13) Invalid caller of this service.

#### Allowed From

Threads

### **Preemption Possible**

No

```
tx_timer_activate, tx_timer_change, tx_timer_create, tx_timer_deactivate, tx_timer_info_get, tx_timer_performance_info_get, tx_timer_performance_system_info_get
```

## tx\_timer\_info\_get

### Retrieve information about an application timer

#### **Prototype**

### Description

This service retrieves information about the specified application timer.

#### **Parameters**

**timer\_ptr** Pointer to a previously created application timer.

**name** Pointer to destination for the pointer to the

timer's name.

**active** Pointer to destination for the timer active

indication. If the timer is inactive or this service is called from the timer itself, a TX\_FALSE value is returned. Otherwise, if the timer is active, a

TX TRUE value is returned.

**remaining ticks** Pointer to destination for the number of timer

ticks left before the timer expires.

**reschedule ticks** Pointer to destination for the number of timer

ticks that will be used to automatically

reschedule this timer. If the value is zero, then

the timer is a one-shot and won't be

rescheduled.

**next\_timer** Pointer to destination for the pointer of the next

created application timer.

Note: Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful timer information retrieval. TX\_TIMER\_ERROR (0x15) Invalid application timer pointer.

#### Allowed From

Initialization, threads, timers, and ISRs

### **Preemption Possible**

No

#### Example

```
TX_TIMER my_timer;
               *name;
CHAR
UINT
              active;
              remaining_ticks;
reschedule_ticks;
ULONG
ULONG
TX_TIMER
              *next_timer;
UINT
                status;
/* Retrieve information about the previously created
   application timer "my timer." */
status = tx timer info get(&my timer, &name,
                          &active, & remaining ticks,
                          &reschedule ticks,
                          &next timer);
/* If status equals TX SUCCESS, the information requested is
   valid. */
```

#### See Also

tx\_timer\_activate, tx\_timer\_change, tx\_timer\_create, tx\_timer\_deactivate, tx\_timer\_delete, tx\_timer\_info\_get, tx\_timer\_performance\_info\_get, tx\_timer\_performance\_system\_info\_get

## tx\_timer\_performance\_info\_get

### Get timer performance information

#### **Prototype**

### Description

This service retrieves performance information about the specified application timer.



The ThreadX library and application must be built with TX\_TIMER\_ENABLE\_PERFORMANCE\_INFO defined for this service to return performance information.

#### **Parameters**

**timer\_ptr** Pointer to previously created timer.

activates Pointer to destination for the number of activation

requests performed on this timer.

**reactivates** Pointer to destination for the number of

automatic reactivations performed on this

periodic timer.

**deactivates** Pointer to destination for the number of

deactivation requests performed on this timer.

**expirations** Pointer to destination for the number of

expirations of this timer.

**expiration\_adjusts** Pointer to destination for the number of internal

expiration adjustments performed on this timer. These adjustments are done in the timer interrupt processing for timers that are larger than the default timer list size (by default timers

with expirations greater than 32 ticks).

i

Supplying a TX\_NULL for any parameter indicates the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful timer performance get.

**TX\_PTR\_ERROR** (0x03) Invalid timer pointer.

**TX\_FEATURE\_NOT\_ENABLED**(0xFF) The system was not compiled with performance information

enabled.

#### Allowed From

Initialization, threads, timers, and ISRs

### Example

```
TX TIMER
             my timer;
ULONG
              activates;
ULONG
              reactivates;
ULONG
              deactivates;
ULONG
              expirations;
ULONG
              expiration adjusts;
/* Retrieve performance information on the previously created
  timer. */
status = tx timer performance info get(&my timer, &activates,
               &reactivates, &deactivates, &expirations,
               &expiration adjusts);
/* If status is TX SUCCESS the performance information was
   successfully retrieved. */
```

```
tx_timer_activate, tx_timer_change, tx_timer_create, tx_timer_deactivate, tx_timer_delete, tx_timer_info_get, tx_timer_performance_system_info_get
```

## tx\_timer\_performance\_system\_info\_get

### Get timer system performance information

### **Prototype**

### **Description**

This service retrieves performance information about all the application timers in the system.



The ThreadX library and application must be built with TX\_TIMER\_ENABLE\_PERFORMANCE\_INFO defined for this service to return performance information.

#### **Parameters**

**activates** Pointer to destination for the total number of

activation requests performed on all timers.

**reactivates** Pointer to destination for the total number of

automatic reactivation performed on all periodic

timers.

**deactivates** Pointer to destination for the total number of

deactivation requests performed on all timers.

**expirations** Pointer to destination for the total number of

expirations on all timers.

**expiration adjusts** Pointer to destination for the total number of

internal expiration adjustments performed on all timers. These adjustments are done in the timer interrupt processing for timers that are larger than the default timer list size (by default timers

with expirations greater than 32 ticks).

i

Supplying a TX\_NULL for any parameter indicates that the parameter is not required.

#### **Return Values**

**TX\_SUCCESS** (0x00) Successful timer system performance get.

TX\_FEATURE\_NOT\_ENABLED(0xFF)

The system was not compiled with performance information enabled.

#### **Allowed From**

ULONG

Initialization, threads, timers, and ISRs

activates;

### **Example**

```
tx_timer_activate, tx_timer_change, tx_timer_create, tx_timer_deactivate, tx_timer_delete, tx_timer_info_get, tx_timer_performance_info_get
```

# T H R E A D

## Device Drivers for ThreadX

This chapter contains a description of device drivers for ThreadX. The information presented in this chapter is designed to help developers write application specific drivers. The following lists the device driver topics covered in this chapter:

- Device Driver Introduction 290
- Driver Functions 290
   Driver Initialization 291
   Driver Control 291
   Driver Access 291
   Driver Input 291
   Driver Output 292
   Driver Interrupts 292
   Driver Status 292
- Simple Driver Example 292
   Simple Driver Initialization 293
   Simple Driver Input 294
   Simple Driver Output 295
   Simple Driver Shortcomings 296

**Driver Termination 292** 

Advanced Driver Issues 297
I/O Buffering 297
Circular Byte Buffers 297
Circular Buffer Input 297
Circular Output Buffer 299
Buffer I/O Management 300
TX\_IO\_BUFFER 300
Buffered I/O Advantage 301
Buffered Driver Responsibilities 301
Interrupt Management 303
Thread Suspension 303

## **Device Driver Introduction**

Communication with the external environment is an important component of most embedded applications. This communication is accomplished through hardware devices that are accessible to the embedded application software. The software components responsible for managing such devices are commonly called *Device Drivers*.

Device drivers in embedded, real-time systems are inherently application dependent. This is true for two principal reasons: the vast diversity of target hardware and the equally vast performance requirements imposed on real-time applications. Because of this, it is virtually impossible to provide a common set of drivers that will meet the requirements of every application. For these reasons, the information in this chapter is designed to help users customize off-the-shelf ThreadX device drivers and write their own specific drivers.

## **Driver Functions**

ThreadX device drivers are composed of eight basic functional areas, as follows:

Driver Initialization
Driver Control
Driver Access
Driver Input
Driver Output
Driver Interrupts
Driver Status
Driver Termination

With the exception of initialization, each driver functional area is optional. Furthermore, the exact

processing in each area is specific to the device driver.

#### **Driver Initialization**

This functional area is responsible for initialization of the actual hardware device and the internal data structures of the driver. Calling other driver services is not allowed until initialization is complete.



The driver's initialization function component is typically called from the **tx\_application\_define** function or from an initialization thread.

#### **Driver Control**

After the driver is initialized and ready for operation, this functional area is responsible for run-time control. Typically, run-time control consists of making changes to the underlying hardware device. Examples include changing the baud rate of a serial device or seeking a new sector on a disk.

#### **Driver Access**

Some device drivers are called only from a single application thread. In such cases, this functional area is not needed. However, in applications where multiple threads need simultaneous driver access, their interaction must be controlled by adding assign/release facilities in the device driver. Alternatively, the application may use a semaphore to control driver access and avoid extra overhead and complication inside the driver.

### **Driver Input**

This functional area is responsible for all device input. The principal issues associated with driver input usually involve how the input is buffered and how threads wait for such input.

#### **Driver Output**

This functional area is responsible for all device output. The principal issues associated with driver output usually involve how the output is buffered and how threads wait to perform output.

#### **Driver Interrupts**

Most real-time systems rely on hardware interrupts to notify the driver of device input, output, control, and error events. Interrupts provide a guaranteed response time to such external events. Instead of interrupts, the driver software may periodically check the external hardware for such events. This technique is called *polling*. It is less real-time than interrupts, but polling may make sense for some less real-time applications.

#### **Driver Status**

This function area is responsible for providing runtime status and statistics associated with the driver operation. Information managed by this function area typically includes the following:

Current device status Input bytes Output bytes Device error counts

#### **Driver Termination**

This functional area is optional. It is only required if the driver and/or the physical hardware device need to be shut down. After being terminated, the driver must not be called again until it is re-initialized.

## Simple Driver Example

An example is the best way to describe a device driver. In this example, the driver assumes a simple serial hardware device with a configuration register,



an input register, and an output register. This simple driver example illustrates the initialization, input, output, and interrupt functional areas.

#### Simple Driver Initialization

The *tx\_sdriver\_initialize* function of the simple driver creates two counting semaphores that are used to manage the driver's input and output operation. The input semaphore is set by the input ISR when a character is received by the serial hardware device. Because of this, the input semaphore is created with an initial count of zero.

Conversely, the output semaphore indicates the availability of the serial hardware transmit register. It is created with a value of one to indicate the transmit register is initially available.

The initialization function is also responsible for installing the low-level interrupt vector handlers for input and output notifications. Like other ThreadX interrupt service routines, the low-level handler must call **\_tx\_thread\_context\_save** before calling the simple driver ISR. After the driver ISR returns, the low-level handler must call

\_tx\_thread\_context\_restore.



It is important that initialization is called before any of the other driver functions. Typically, driver initialization is called from **tx\_application\_define**.

See Figure 9 on page 294 for the initialization source code of the simple driver.

#### FIGURE 9. Simple Driver Initialization

# Simple Driver Input

Input for the simple driver centers around the input semaphore. When a serial device input interrupt is received, the input semaphore is set. If one or more threads are waiting for a character from the driver, the thread waiting the longest is resumed. If no threads are waiting, the semaphore simply remains set until a thread calls the drive input function.

There are several limitations to the simple driver input handling. The most significant is the potential for dropping input characters. This is possible because there is no ability to buffer input characters that arrive before the previous character is processed. This is easily handled by adding an input character buffer.

 $\int_{\mathcal{I}} \int_{\mathcal{I}} dx$ 

Only threads are allowed to call the **tx\_sdriver\_input** function.

Figure 10 shows the source code associated with simple driver input.

#### FIGURE 10. Simple Driver Input

## Simple Driver Output

Output processing utilizes the output semaphore to signal when the serial device's transmit register is free. Before an output character is actually written to the device, the output semaphore is obtained. If it is not available, the previous transmit is not yet complete.

The output ISR is responsible for handling the transmit complete interrupt. Processing of the output ISR amounts to setting the output semaphore, thereby allowing output of another character.



Only threads are allowed to call the tx\_sdriver\_output function.

Figure 11 shows the source code associated with simple driver output.

```
VOID
      tx sdriver output (UCHAR alpha)
    /* Determine if the hardware is ready to transmit a
      character. If not, suspend until the previous output
       completes. */
    tx semaphore get (&tx sdriver output semaphore,
                                            TX WAIT FOREVER);
    /* Send the character through the hardware. */
    *serial hardware output ptr = alpha;
}
VOID
      tx sdriver output ISR(VOID)
    /* Notify thread last character transmit is
       complete. */
   tx semaphore put(&tx sdriver output semaphore);
}
```

#### FIGURE 11. Simple Driver Output

## Simple Driver Shortcomings

This simple device driver example illustrates the basic idea of a ThreadX device driver. However, because the simple device driver does not address data buffering or any overhead issues, it does not fully represent real-world ThreadX drivers. The following section describes some of the more advanced issues associated with device drivers.

## **Advanced Driver Issues**

As mentioned previously, device drivers have requirements as unique as their applications. Some applications may require an enormous amount of data buffering while another application may require optimized driver ISRs because of high-frequency device interrupts.

### I/O Buffering

Data buffering in real-time embedded applications requires considerable planning. Some of the design is dictated by the underlying hardware device. If the device provides basic byte I/O, a simple circular buffer is probably in order. However, if the device provides block, DMA, or packet I/O, a buffer management scheme is probably warranted.

# Circular Byte Buffers

Circular byte buffers are typically used in drivers that manage a simple serial hardware device like a UART. Two circular buffers are most often used in such situations—one for input and one for output.

Each circular byte buffer is comprised of a byte memory area (typically an array of UCHARs), a read pointer, and a write pointer. A buffer is considered empty when the read pointer and the write pointers reference the same memory location in the buffer. Driver initialization sets both the read and write buffer pointers to the beginning address of the buffer.

## Circular Buffer Input

The input buffer is used to hold characters that arrive before the application is ready for them. When an input character is received (usually in an interrupt service routine), the new character is retrieved from the hardware device and placed into the input buffer at the location pointed to by the write pointer. The write pointer is then advanced to the next position in

the buffer. If the next position is past the end of the buffer, the write pointer is set to the beginning of the buffer. The queue full condition is handled by canceling the write pointer advancement if the new write pointer is the same as the read pointer.

Application input byte requests to the driver first examine the read and write pointers of the input buffer. If the read and write pointers are identical, the buffer is empty. Otherwise, if the read pointer is not the same, the byte pointed to by the read pointer is copied from the input buffer and the read pointer is advanced to the next buffer location. If the new read pointer is past the end of the buffer, it is reset to the beginning. Figure 12 shows the logic for the circular input buffer.

```
UCHAR tx input buffer[MAX SIZE];
       tx input_write_ptr;
UCHAR
UCHAR tx input read ptr;
/* Initialization. */
tx input write ptr = &tx input buffer[0];
tx input read ptr =    &tx input buffer[0];
/* Input byte ISR... UCHAR alpha has character from device. */
save ptr = tx input write ptr;
*tx input write ptr++ = alpha;
if (tx input write ptr > &tx input buffer[MAX SIZE-1])
   tx input write ptr = &tx input buffer[0]; /* Wrap */
if (tx input write ptr == tx input read ptr)
   tx input write ptr = save ptr; /* Buffer full */
/* Retrieve input byte from buffer... */
if (tx input read ptr != tx input write ptr)
{
   alpha = *tx input read ptr++;
   if (tx input read ptr > &tx input buffer[MAX SIZE-1])
       tx input read ptr = &tx input buffer[0];
```

FIGURE 12. Logic for Circular Input Buffer





For reliable operation, it may be necessary to lockout interrupts when manipulating the read and write pointers of both the input and output circular buffers.

# Circular Output Buffer

The output buffer is used to hold characters that have arrived for output before the hardware device finished sending the previous byte. Output buffer processing is similar to input buffer processing, except the transmit complete interrupt processing manipulates the output read pointer, while the application output request utilizes the output write pointer. Otherwise, the output buffer processing is the same. Figure 13 shows the logic for the circular output buffer.

```
UCHAR tx output buffer[MAX SIZE];
UCHAR tx output write ptr;
UCHAR tx output read ptr;
/* Initialization. */
tx output write ptr = &tx output buffer[0];
tx output read ptr =  &tx output buffer[0];
/* Transmit complete ISR... Device ready to send. */
if (tx output read ptr != tx output write ptr)
   *device reg = *tx output read ptr++;
   if (tx output read reg > &tx output buffer[MAX SIZE-1])
       tx output read ptr = &tx output buffer[0];
}
/* Output byte driver service. If device busy, buffer! */
save ptr = tx output write ptr;
*tx output write ptr++ = alpha;
if (tx output write ptr > &tx output buffer[MAX SIZE-1])
   tx output write ptr = &tx output buffer[0]; /* Wrap */
if (tx output write ptr == tx output read ptr)
   tx output write ptr = save ptr; /* Buffer full! */
```

FIGURE 13. Logic for Circular Output Buffer

### Buffer I/O Management

To improve the performance of embedded microprocessors, many peripheral device devices transmit and receive data with buffers supplied by software. In some implementations, multiple buffers may be used to transmit or receive individual packets of data.

The size and location of I/O buffers is determined by the application and/or driver software. Typically, buffers are fixed in size and managed within a ThreadX block memory pool. Figure 14 describes a typical I/O buffer and a ThreadX block memory pool that manages their allocation.

#### FIGURE 14. I/O Buffer

### TX\_IO\_BUFFER

The typedef TX\_IO\_BUFFER consists of two pointers. The *tx\_next\_packet* pointer is used to link multiple packets on either the input or output list. The



tx\_next\_buffer pointer is used to link together buffers that make up an individual packet of data from the device. Both of these pointers are set to NULL when the buffer is allocated from the pool. In addition, some devices may require another field to indicate how much of the buffer area actually contains data.

### Buffered I/O Advantage

What are the advantages of a buffer I/O scheme? The biggest advantage is that data is not copied between the device registers and the application's memory. Instead, the driver provides the device with a series of buffer pointers. Physical device I/O utilizes the supplied buffer memory directly.

Using the processor to copy input or output packets of information is extremely costly and should be avoided in any high throughput I/O situation.


Another advantage to the buffered I/O approach is that the input and output lists do not have full conditions. All of the available buffers can be on either list at any one time. This contrasts with the simple byte circular buffers presented earlier in the chapter. Each had a fixed size determined at compilation.

# Buffered Driver Responsibilities


Buffered device drivers are only concerned with managing linked lists of I/O buffers. An input buffer list is maintained for packets that are received before the application software is ready. Conversely, an output buffer list is maintained for packets being sent faster than the hardware device can handle them. Figure 15 on page 302 shows simple input and

output linked lists of data packets and the buffer(s) that make up each packet.

#### Input List

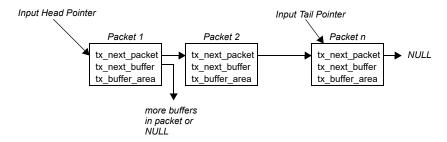

#### **Output List**



#### FIGURE 15. Input-Output Lists

Applications interface with buffered drivers with the same I/O buffers. On transmit, application software provides the driver with one or more buffers to transmit. When the application software requests input, the driver returns the input data in I/O buffers.



In some applications, it may be useful to build a driver input interface that requires the application to exchange a free buffer for an input buffer from the driver. This might alleviate some buffer allocation processing inside of the driver.

### Interrupt Management

In some applications, the device interrupt frequency may prohibit writing the ISR in C or to interact with ThreadX on each interrupt. For example, if it takes 25us to save and restore the interrupted context, it would not be advisable to perform a full context save if the interrupt frequency was 50us. In such cases, a small assembly language ISR is used to handle most of the device interrupts. This low-overhead ISR would only interact with ThreadX when necessary.

A similar discussion can be found in the interrupt management discussion at the end of Chapter 3.

# Thread Suspension

In the simple driver example presented earlier in this chapter, the caller of the input service suspends if a character is not available. In some applications, this might not be acceptable.

For example, if the thread responsible for processing input from a driver also has other duties, suspending on just the driver input is probably not going to work. Instead, the driver needs to be customized to request processing similar to the way other processing requests are made to the thread.

In most cases, the input buffer is placed on a linked list and an input event message is sent to the thread's input queue.

# T H R E A D

# Demonstration System for ThreadX

This chapter contains a description of the demonstration system that is delivered with all ThreadX processor support packages. The following lists specific demonstration areas that are covered in this chapter:

- Overview 306
- Application Define 306
   Initial Execution 307
- Thread 0 308
- Thread 1 308
- Thread 2 308
- Threads 3 and 4 309
- Thread 5 309
- Threads 6 and 7 310
- Observing the Demonstration 310
- Distribution file: demo\_threadx.c 311

## **Overview**

Each ThreadX product distribution contains a demonstration system that runs on all supported microprocessors.

This example system is defined in the distribution file **demo\_threadx.c** and is designed to illustrate how ThreadX is used in an embedded multithread environment. The demonstration consists of initialization, eight threads, one byte pool, one block pool, one queue, one semaphore, one mutex, and one event flags group.

i

Except for the thread's stack size, the demonstration application is identical on all ThreadX supported processors.

The complete listing of *demo\_threadx.c*, including the line numbers referenced throughout the remainder of this chapter, is displayed on page 312 and following.

## **Application Define**

The *tx\_application\_define* function executes after the basic ThreadX initialization is complete. It is responsible for setting up all of the initial system resources, including threads, queues, semaphores, mutexes, event flags, and memory pools.

The demonstration system's **tx\_application\_define** (line numbers 60-164) creates the demonstration objects in the following order:

```
byte_pool_0
thread_0
thread_1
thread_2
thread 3
```



```
thread_4
thread_5
thread_6
thread_7
queue_0
semaphore_0
event_flags_0
mutex_0
block pool 0
```

The demonstration system does not create any other additional ThreadX objects. However, an actual application may create system objects during runtime inside of executing threads.

#### Initial Execution

All threads are created with the **TX\_AUTO\_START** option. This makes them initially ready for execution. After **tx\_application\_define** completes, control is transferred to the thread scheduler and from there to each individual thread.

The order in which the threads execute is determined by their priority and the order that they were created. In the demonstration system, **thread\_0** executes first because it has the highest priority (it was created with a priority of 1). After **thread\_0** suspends, **thread\_5** is executed, followed by the execution of **thread\_3**, **thread\_4**, **thread\_6**, **thread\_7**, **thread\_1**, and finally **thread\_2**.



Even though thread\_3 and thread\_4 have the same priority (both created with a priority of 8), thread\_3 executes first. This is because thread\_3 was created and became ready before thread\_4. Threads of equal priority execute in a FIFO fashion.

## Thread 0

The function **thread\_0\_entry** marks the entry point of the thread (*lines 167-190*). **Thread\_0** is the first thread in the demonstration system to execute. Its processing is simple: it increments its counter, sleeps for 10 timer ticks, sets an event flag to wake up **thread\_5**, then repeats the sequence.

**Thread\_0** is the highest priority thread in the system. When its requested sleep expires, it will preempt any other executing thread in the demonstration.

## Thread 1

The function *thread\_1\_entry* marks the entry point of the thread (*lines 193-216*). *Thread\_1* is the second-to-last thread in the demonstration system to execute. Its processing consists of incrementing its counter, sending a message to *thread\_2* (*through queue\_0*), and repeating the sequence. Notice that *thread\_1* suspends whenever *queue\_0* becomes full (*line 207*).

## Thread 2

The function *thread\_2\_entry* marks the entry point of the thread *(lines 219-243)*. *Thread\_2* is the last thread in the demonstration system to execute. Its processing consists of incrementing its counter, getting a message from *thread\_1* (through *queue\_0*), and repeating the sequence. Notice that *thread\_2* suspends whenever *queue\_0* becomes empty *(line 233)*.

Although *thread\_1* and *thread\_2* share the lowest priority in the demonstration system (*priority 16*), they

are also the only threads that are ready for execution most of the time. They are also the only threads created with time-slicing (*lines 87 and 93*). Each thread is allowed to execute for a maximum of 4 timer ticks before the other thread is executed.

## Threads 3 and 4

The function *thread\_3\_and\_4\_entry* marks the entry point of both *thread\_3* and *thread\_4* (*lines 246-280*). Both threads have a priority of 8, which makes them the third and fourth threads in the demonstration system to execute. The processing for each thread is the same: incrementing its counter, getting *semaphore\_0*, sleeping for 2 timer ticks, releasing *semaphore\_0*, and repeating the sequence. Notice that each thread suspends whenever *semaphore\_0* is unavailable (*line 264*).

Also both threads use the same function for their main processing. This presents no problems because they both have their own unique stack, and C is naturally reentrant. Each thread determines which one it is by examination of the thread input parameter (*line 258*), which is setup when they are created (*lines 102 and 109*).



It is also reasonable to obtain the current thread point during thread execution and compare it with the control block's address to determine thread identity.

## Thread 5

The function *thread\_5\_entry* marks the entry point of the thread *(lines 283-305)*. *Thread\_5* is the second thread in the demonstration system to execute. Its processing consists of incrementing its

counter, getting an event flag from *thread\_0* (through *event\_flags\_0*), and repeating the sequence. Notice that *thread\_5* suspends whenever the event flag in *event\_flags\_0* is not available (*line 298*).

## Threads 6 and 7

The function *thread\_6\_and\_7\_entry* marks the entry point of both *thread\_6* and *thread\_7* (*lines 307-358*). Both threads have a priority of 8, which makes them the fifth and sixth threads in the demonstration system to execute. The processing for each thread is the same: incrementing its counter, getting *mutex\_0* twice, sleeping for 2 timer ticks, releasing *mutex\_0* twice, and repeating the sequence. Notice that each thread suspends whenever *mutex\_0* is unavailable (*line 325*).

Also both threads use the same function for their main processing. This presents no problems because they both have their own unique stack, and C is naturally reentrant. Each thread determines which one it is by examination of the thread input parameter (*line 319*), which is setup when they are created (*lines 126 and 133*).

## Observing the Demonstration

Each of the demonstration threads increments its own unique counter. The following counters may be examined to check on the demo's operation:

thread\_0\_counter thread\_1\_counter thread\_2\_counter thread\_3\_counter thread\_4\_counter thread\_5\_counter thread\_6\_counter thread\_7\_counter Each of these counters should continue to increase as the demonstration executes, with *thread\_1\_counter* and *thread\_2\_counter* increasing at the fastest rate.

## Distribution file: demo\_threadx.c

This section displays the complete listing of **demo\_threadx.c**, including the line numbers referenced throughout this chapter.

```
001
       threads of different priorities, using a message queue, semaphore, mutex, event flags group,
002
       byte pool, and block pool. */
003
004 #include "tx api.h"
005
006 #define DEMO STACK SIZE
                                  1024
007 #define DEMO_BYTE POOL SIZE
                                  9120
008 #define DEMO_BLOCK_POOL_SIZE
                                  100
009 #define DEMO_QUEUE_SIZE
010
011 /* Define the ThreadX object control blocks... */
012
013 TX_THREAD
                           thread 0;
014 TX THREAD
                           thread 1:
015 TX THREAD
                          thread 2;
016 TX_THREAD
017 TX THREAD
                          thread_3;
thread 4;
                         thread 5;
018 TX_THREAD
019 TX THREAD
                           thread 6;
                         thread_7;
020 TX THREAD
021 TX_QUEUE
022 TX_SEMAPHORE
                         queue_0;
semaphore 0;
023 TX MUTEX
                          mutex 0;
024 TX_EVENT_FLAGS_GROUP event_flags_0;
                   byte_pool_0;
block_pool_0;
025 TX BYTE POOL
026 TX_BLOCK_POOL
027
028 /* Define the counters used in the demo application... */
029
0.30 ULONG
                            thread_0_counter;
031 ULONG
                            thread_1_counter;
032 ULONG
                            thread 1 messages sent;
                            thread_2_counter;
033 ULONG
034 ULONG
                            thread_2_messages_received;
035 ULONG
                            thread 3 counter;
                           thread 4 counter;
036 ULONG
                           thread_5_counter;
thread_6_counter;
037 ULONG
038 ULONG
039 ULONG
                           thread_7_counter;
040
041 /* Define thread prototypes. */
042
043 void
           thread_0_entry(ULONG thread_input);
044 void thread_1_entry(ULONG thread_input);
045 void thread 2 entry(ULONG thread input);
046 void thread 3 and 4 entry(ULONG thread input);
047 void thread_5_entry(ULONG thread_input);
048 void thread_6 and 7 entry(ULONG thread_input);
050
051 /* Define main entry point. */
052
053 int main()
054 {
0.5.5
056
       /* Enter the ThreadX kernel. */
057
      tx_kernel_enter();
058 }
059
060 /* Define what the initial system looks like. */
061 void tx application define (void *first unused memory)
062 {
0.63
064 CHAR *pointer;
065
       066
067
068
                                 DEMO_BYTE_POOL_SIZE);
069
070
       /* Put system definition stuff in here, e.g., thread creates and other assorted
071
         create information. */
```



```
072
073
        /* Allocate the stack for thread 0. */
074
        tx_byte_allocate(&byte_pool_0, &pointer, DEMO_STACK_SIZE, TX_NO_WAIT);
075
076
        /* Create the main thread. */
        tx_thread_create(&thread_0, "thread_0", thread_0_entry, 0,
077
078
                                   pointer, DEMO STACK SIZE,
079
                                   1, 1, TX NO TIME SLICE, TX AUTO START);
080
        /\!\!^{\star} Allocate the stack for thread 1. \!\!^{\star}/\!\!
0.81
082
        tx_byte_allocate(&byte_pool_0, &pointer, DEMO_STACK_SIZE, TX_NO_WAIT);
083
084
        /* Create threads 1 and 2. These threads pass information through a ThreadX
085
          message queue. It is also interesting to note that these threads have a time
086
        tx_thread_create(&thread_1, "thread 1", thread_1_entry, 1,
087
088
                                   pointer, DEMO_STACK_SIZE,
                                   16, 16, 4, TX_AUTO_START);
089
090
091
        /* Allocate the stack for thread 2. */
092
        tx_byte_allocate(&byte_pool_0, &pointer, DEMO_STACK_SIZE, TX_NO_WAIT);
093
        tx_thread_create(&thread_2, "thread_2", thread_2_entry, 2,
094
                                  pointer, DEMO STACK SIZE,
095
                                   16, 16, 4, TX_AUTO_START);
096
097
        /* Allocate the stack for thread 3. */
        tx_byte_allocate(&byte_pool_0, &pointer, DEMO_STACK_SIZE, TX_NO_WAIT);
098
099
100
        /* Create threads 3 and 4. These threads compete for a ThreadX counting semaphore.
101
          An interesting thing here is that both threads share the same instruction area. */
        tx_thread_create(&thread_3, "thread_3", thread_3_and_4_entry, 3,
                                   pointer, DEMO_STACK_SIZE,
104
                                   8, 8, TX NO TIME SLICE, TX AUTO START);
        /\,^\star Allocate the stack for thread 4. \,^\star/\,
106
        tx_byte_allocate(&byte_pool_0, &pointer, DEMO_STACK_SIZE, TX_NO WAIT);
107
108
        109
111
                                   8, 8, TX_NO_TIME_SLICE, TX_AUTO_START);
112
113
        /* Allocate the stack for thread 5. */
        tx_byte_allocate(&byte_pool_0, &pointer, DEMO_STACK_SIZE, TX_NO_WAIT);
114
115
        /* Create thread 5. This thread simply pends on an event flag, which will be set
116
117
          by thread 0. */
        tx_thread_create(&thread_5, "thread 5", thread_5_entry, 5,
118
                                  pointer, DEMO_STACK_SIZE,
119
120
                                   4, 4, TX NO TIME SLICE, TX AUTO START);
121
122
        /* Allocate the stack for thread 6. */
        tx_byte_allocate(&byte_pool_0, &pointer, DEMO_STACK_SIZE, TX_NO_WAIT);
123
124
125
        /* Create threads 6 and 7. These threads compete for a ThreadX mutex. */
126
        tx_thread_create(&thread_6, "thread 6", thread_6_and_7_entry, 6,
                                   pointer, DEMO_STACK_SIZE,
128
                                   8, 8, TX_NO_TIME_SLICE, TX_AUTO_START);
129
        /* Allocate the stack for thread 7. */
130
        tx_byte_allocate(&byte_pool_0, &pointer, DEMO_STACK_SIZE, TX_NO_WAIT);
131
132
133
        tx_thread_create(&thread_7, "thread 7", thread_6_and_7_entry, 7,
                                  pointer, DEMO STACK SIZE,
134
                                   8, 8, TX_NO_TIME_SLICE, TX_AUTO_START);
136
        /* Allocate the message queue. */
137
138
        tx_byte_allocate(&byte_pool_0, &pointer, DEMO_QUEUE_SIZE*sizeof(ULONG), TX_NO_WAIT);
139
140
        /st Create the message queue shared by threads 1 and 2. st/
141
        tx queue create (&queue 0, "queue 0", TX 1 ULONG, pointer, DEMO QUEUE SIZE*sizeof(ULONG));
142
143
        /* Create the semaphore used by threads 3 and 4. */
```

```
144
        tx semaphore create (&semaphore 0, "semaphore 0", 1);
145
146
        /st Create the event flags group used by threads 1 and 5. st/
147
        tx event flags create (&event flags 0, "event flags 0");
148
        /\star Create the mutex used by thread 6 and 7 without priority inheritance. \,\,\star/
149
150
        tx mutex create(&mutex 0, "mutex 0", TX NO INHERIT);
151
152
        /* Allocate the memory for a small block pool. */
        tx_byte_allocate(&byte_pool_0, &pointer, DEMO_BLOCK_POOL_SIZE, TX_NO_WAIT);
154
155
        /* Create a block memory pool to allocate a message buffer from. */
        tx_block_pool_create(&block_pool_0, "block pool 0", sizeof(ULONG), pointer,
156
157
                                   DEMO_BLOCK_POOL_SIZE);
158
        /* Allocate a block and release the block memory. */
159
160
        tx_block_allocate(&block_pool_0, &pointer, TX_NO_WAIT);
161
162
        /* Release the block back to the pool. */
163
        tx block release(pointer);
164 }
165
166 /* Define the test threads. */
167 void thread_0_entry(ULONG thread_input)
168 {
169
170 UINT status;
171
172
       /* This thread simply sits in while-forever-sleep loop. */
173
174
       while(1)
175
176
177
          /* Increment the thread counter. */
178
          thread_0_counter++;
179
           /* Sleep for 10 ticks. */
180
181
          tx_thread_sleep(10);
182
183
           /* Set event flag 0 to wakeup thread 5. */
184
           status = tx event flags set(&event flags 0, 0x1, TX OR);
185
           /* Check status. */
if (status != TX SUCCESS)
186
187
188
              break;
189
190 }
191
192
193 void
             thread 1 entry (ULONG thread input)
194 {
195
196 UINT status;
197
198
199
        /^{\star} This thread simply sends messages to a queue shared by thread 2. ^{\star}/
200
        while(1)
201
          /* Increment the thread counter. */
203
204
           thread 1 counter++;
205
206
          /* Send message to queue 0. */
          status = tx_queue_send(&queue_0, &thread_1_messages_sent, TX_WAIT_FOREVER);
208
209
           /* Check completion status. */
210
          if (status != TX_SUCCESS)
211
              break;
212
213
           /* Increment the message sent. */
214
           thread 1 messages sent++;
215
```

```
216 }
217
218
219 void
             thread 2 entry (ULONG thread input)
220 {
221
222 ULONG received message;
223 UINT
           status;
224
       /st This thread retrieves messages placed on the queue by thread 1. st/
225
226
       while(1)
227
228
           /\!\!\!\!\!\!^\star Increment the thread counter. \!\!\!\!\!\!\!^\star/
229
230
           thread_2_counter++;
231
232
          /* Retrieve a message from the gueue. */
233
          status = tx_queue_receive(&queue_0, &received_message, TX_WAIT_FOREVER);
234
235
          /* Check completion status and make sure the message is what we
236
             expected. */
          if ((status != TX_SUCCESS) || (received_message != thread_2_messages_received))
237
238
             break;
239
240
           /* Otherwise, all is okay. Increment the received message count. */
          thread_2_messages_received++;
241
242
243 }
244
245
246 void
            thread_3_and_4_entry(ULONG thread_input)
247 {
248
249 UINT
           status;
250
251
      /* This function is executed from thread 3 and thread 4. As the loop
252
253
          below shows, these function compete for ownership of semaphore 0. */
       while(1)
254
255
256
257
          /* Increment the thread counter. */
258
         if (thread_input == 3)
259
              thread_3_counter++;
260
          else
261
             thread 4 counter++;
262
263
          /* Get the semaphore with suspension. */
264
          status = tx semaphore get(&semaphore 0, TX WAIT FOREVER);
265
           /* Check status. */
266
          if (status != TX_SUCCESS)
267
268
             break;
269
270
          /* Sleep for 2 ticks to hold the semaphore. */
          tx_thread_sleep(2);
272
273
          /* Release the semaphore. */
274
          status = tx_semaphore_put(&semaphore_0);
275
276
           /* Check status. */
277
           if (status != TX SUCCESS)
278
             break;
279
280 }
281
282
283 void
            thread_5_entry(ULONG thread_input)
284 {
285
286 UINT
            status;
287 ULONG actual_flags;
```

```
288
289
290
       /* This thread simply waits for an event in a forever loop. */
291
       while(1)
292
293
294
          /* Increment the thread counter. */
295
          thread 5 counter++;
296
297
          /* Wait for event flag 0. */
298
         status = tx_event_flags_get(&event_flags_0, 0x1, TX_OR_CLEAR,
299
                                  &actual flags, TX WAIT FOREVER);
300
301
          /* Check status. */
302
          if ((status != TX_SUCCESS) || (actual_flags != 0x1))
303
             break;
304
305 }
306
307 void
            thread 6 and 7 entry (ULONG thread input)
308 {
309
310 UINT status;
311
312
       /* This function is executed from thread 6 and thread 7. As the loop
313
314
         below shows, these function compete for ownership of mutex_0. */
315
       while(1)
316
317
318
          /* Increment the thread counter. */
319
          if (thread_input == 6)
320
             thread_6_counter++;
321
          else
             thread_7_counter++;
322
323
          /st Get the mutex with suspension. st/
324
325
         status = tx_mutex_get(&mutex_0, TX_WAIT_FOREVER);
326
327
           /* Check status. */
          if (status != TX SUCCESS)
328
329
             break;
330
331
          /st Get the mutex again with suspension. This shows
332
            that an owning thread may retrieve the mutex it
333
             owns multiple times. */
334
          status = tx_mutex_get(&mutex_0, TX_WAIT_FOREVER);
335
336
          /* Check status. */
337
          if (status != TX SUCCESS)
338
             break;
339
340
          /* Sleep for 2 ticks to hold the mutex. */
341
          tx thread sleep(2);
342
          /* Release the mutex. */
343
344
          status = tx_mutex_put(&mutex_0);
345
346
          /* Check status. */
          if (status != TX SUCCESS)
347
348
349
350
         /* Release the mutex again. This will actually
351
            release ownership since it was obtained twice. */
352
          status = tx_mutex_put(&mutex_0);
353
354
           /* Check status. */
          if (status != TX_SUCCESS)
355
356
             break;
357
358 }
```

## ThreadX API Services

- → Entry Function 318
- → Block Memory Services 318
- Byte Memory Services 318
- Event Flags Services 319
- Interrupt Control 319
- Mutex Services 319
- Queue Services 320
- Semaphore Services 320
- Thread Control Services 321
- Time Services 322
- Timer Services 322

```
Entry
                     VOID
                               tx kernel enter(VOID);
Function
Block
                     UINT
                               tx_block_allocate(TX BLOCK POOL *pool ptr,
                                  VOID **block ptr, ULONG wait option);
Memory
                     UINT
                               tx block pool create (TX BLOCK POOL *pool ptr,
Services
                                  CHAR *name_ptr, ULONG block_size,
                                  VOID *pool start, ULONG pool size);
                     UINT
                               tx_block_pool_delete(TX BLOCK POOL *pool ptr);
                     UINT
                               tx_block_pool_info_get(TX BLOCK POOL *pool ptr,
                                  CHAR **name,
                                  ULONG *available_blocks, ULONG *total_blocks,
                                  TX THREAD **first suspended,
                                  ULONG *suspended count,
                                  TX BLOCK POOL **next pool);
                     UINT
                               tx block pool performance info get(TX BLOCK POOL *pool ptr,
                                  ULONG *allocates, ULONG *releases, ULONG *suspensions,
                                  ULONG *timeouts);
                     UINT
                               tx block pool performance system info get(ULONG *allocates,
                                  ULONG *releases, ULONG *suspensions, ULONG *timeouts);
                     UINT
                               tx block pool prioritize (TX BLOCK POOL *pool ptr);
                               tx_block_release(VOID *block ptr);
                     UINT
Byte
                     UINT
                               tx byte allocate (TX BYTE POOL *pool ptr,
                                  VOID **memory_ptr,
Memory
                                  ULONG memory size, ULONG wait option);
Services
                               tx_byte_pool_create(TX_BYTE POOL *pool ptr,
                     UINT
                                  CHAR *name ptr,
                                  VOID *pool_start, ULONG pool_size);
                     UINT
                               tx byte pool delete(TX BYTE POOL *pool ptr);
                               tx byte pool info get (TX BYTE POOL *pool ptr,
                     UINT
                                  CHAR **name, ULONG *available bytes,
                                  ULONG *fragments, TX THREAD **first suspended,
                                  ULONG *suspended count,
                                  TX BYTE POOL **next pool);
                     UINT
                               tx_byte_pool_performance_info_get(TX_BYTE_POOL *pool_ptr,
                                  ULONG *allocates,
                                  ULONG *releases, ULONG *fragments_searched, ULONG *merges,
                                  ULONG *splits, ULONG *suspensions, ULONG *timeouts);
                     UINT
                               tx_byte_pool_performance_system_info_get(ULONG *allocates,
                                  ULONG *releases, ULONG *fragments searched, ULONG *merges,
                                  ULONG *splits, ULONG *suspensions, ULONG *timeouts);
                     UINT
                               tx_byte_pool_prioritize(TX_BYTE_POOL *pool_ptr);
                     UINT
                               tx byte release (VOID *memory ptr);
```



Event Flags	UINT	<pre>tx_event_flags_create(TX_EVENT_FLAGS_GROUP *group_ptr,</pre>
Services	UINT	<pre>tx_event_flags_delete(TX_EVENT_FLAGS_GROUP *group_ptr);</pre>
	UINT	<pre>tx_event_flags_get(TX_EVENT_FLAGS_GROUP *group_ptr,     ULONG requested_flags, UINT get_option,     ULONG *actual_flags_ptr, ULONG wait_option);</pre>
	UINT	<pre>tx_event_flags_info_get(TX_EVENT_FLAGS_GROUP *group_ptr,</pre>
	UINT	<pre>tx_event_flags_performance_info_get(TX_EVENT_FLAGS_GROUP     *group_ptr, ULONG *sets, ULONG *gets, ULONG *suspensions,     ULONG *timeouts);</pre>
	UINT	<pre>tx_event_flags_performance_system_info_get(ULONG *sets,     ULONG *gets,     ULONG *suspensions, ULONG *timeouts);</pre>
	UINT	<pre>tx_event_flags_set(TX_EVENT_FLAGS_GROUP *group_ptr,     ULONG flags_to_set, UINT set_option);</pre>
	UINT	<pre>tx_event_flags_set_notify(TX_EVENT_FLAGS_GROUP *group_ptr,</pre>
Interrupt Control	UINT	<pre>tx_interrupt_control(UINT new_posture);</pre>
Mutex Services	UINT	<pre>tx_mutex_create(TX_MUTEX *mutex_ptr, CHAR *name_ptr,</pre>
	UINT	<pre>tx_mutex_delete(TX_MUTEX *mutex_ptr);</pre>
	UINT	<pre>tx_mutex_get(TX_MUTEX *mutex_ptr, ULONG wait_option);</pre>
	UINT	<pre>tx_mutex_info_get(TX_MUTEX *mutex_ptr, CHAR **name,     ULONG *count, TX_THREAD **owner,     TX_THREAD **first_suspended,     ULONG *suspended_count,     TX_MUTEX **next_mutex);</pre>
	UINT	<pre>tx_mutex_performance_info_get(TX_MUTEX *mutex_ptr, ULONG     *puts, ULONG *gets, ULONG *suspensions, ULONG *timeouts,     ULONG *inversions, ULONG *inheritances);</pre>
	UINT	<pre>tx_mutex_performance_system_info_get(ULONG *puts, ULONG     *gets,     ULONG *suspensions, ULONG *timeouts, ULONG *inversions,     ULONG *inheritances);</pre>
	UINT	<pre>tx_mutex_prioritize(TX_MUTEX *mutex_ptr);</pre>
	UINT	<pre>tx_mutex_put(TX_MUTEX *mutex_ptr);</pre>

```
Queue
                 UINT
                           tx queue create (TX QUEUE *queue ptr, CHAR *name ptr,
                               UINT message size, VOID *queue start,
Services
                              ULONG queue_size);
                 UINT
                           tx queue delete(TX QUEUE *queue ptr);
                 UINT
                           tx_queue_flush(TX_QUEUE *queue_ptr);
                           tx_queue_front_send(TX_QUEUE *queue_ptr, VOID *source_ptr,
                 UINT
                               ULONG wait option);
                 UINT
                           tx queue info get (TX QUEUE *queue ptr, CHAR **name,
                               ULONG *enqueued, ULONG *available storage,
                              TX_THREAD **first_suspended,
                              ULONG *suspended count, TX QUEUE **next queue);
                 UINT
                           tx_queue_performance_info_get(TX QUEUE *queue ptr,
                               ULONG *messages_sent, ULONG *messages received,
                              ULONG *empty_suspensions, ULONG *full_suspensions,
                              ULONG *full errors, ULONG *timeouts);
                           {\tt tx\_queue\_performance\_system\_info\_get} ({\tt ULONG \ *messages\_sent},
                 UINT
                               ULONG *messages received, ULONG *empty suspensions,
                              ULONG *full_suspensions, ULONG *full_errors,
                              ULONG *timeouts);
                 UINT
                           tx_queue_prioritize(TX QUEUE *queue ptr);
                 UINT
                           tx queue receive (TX QUEUE *queue ptr,
                              VOID *destination ptr, ULONG wait option);
                           tx_queue_send(TX_QUEUE *queue_ptr, VOID *source_ptr,
                 UINT
                              ULONG wait option);
                           tx_queue_send_notify(TX_QUEUE *queue_ptr, VOID
                 UINT
                               (*queue send notify)(TX QUEUE *));
Semaphore
                 UINT
                           tx_semaphore_ceiling_put(TX_SEMAPHORE *semaphore_ptr,
                              ULONG ceiling);
Services
                 UINT
                           tx semaphore create (TX SEMAPHORE *semaphore ptr,
                              CHAR *name ptr, ULONG initial count);
                 UINT
                           tx semaphore delete (TX SEMAPHORE *semaphore ptr);
                 UINT
                           tx_semaphore_get(TX SEMAPHORE *semaphore ptr,
                              ULONG wait_option);
                 UINT
                           tx semaphore info get (TX SEMAPHORE *semaphore ptr, CHAR **name,
                              ULONG *current value,
                              TX THREAD **first suspended,
                              ULONG *suspended_count,
                               TX SEMAPHORE **next semaphore);
                 UINT
                           tx semaphore performance info get (TX SEMAPHORE *semaphore ptr,
                              ULONG *puts, ULONG *gets, ULONG *suspensions,
                              ULONG *timeouts);
                 UINT
                           tx_semaphore_performance_system_info_get(ULONG *puts,
```

ULONG \*gets, ULONG \*suspensions, ULONG \*timeouts);

tx semaphore prioritize(TX SEMAPHORE \*semaphore ptr);



UINT

```
UINT
                           tx semaphore put(TX SEMAPHORE *semaphore ptr);
                 UINT
                           tx_semaphore_put_notify(TX SEMAPHORE *semaphore ptr,
                              VOID (*semaphore put notify) (TX SEMAPHORE *));
Thread
                 UINT
                           tx thread create (TX THREAD *thread ptr,
                              CHAR *name ptr,
Control
                              VOID (*entry function) (ULONG), ULONG entry input,
Services
                              VOID *stack_start, ULONG stack_size,
                              UINT priority, UINT preempt_threshold,
                              ULONG time slice, UINT auto start);
                 UINT
                           tx thread delete(TX THREAD *thread ptr);
                 UINT
                           tx_thread_entry_exit_notify(TX_THREAD *thread ptr,
                              VOID (*thread_entry_exit_notify)(TX_THREAD *, UINT));
                 TX THREAD *tx thread identify(VOID);
                 UINT
                           tx_thread_info_get(TX THREAD *thread ptr, CHAR **name,
                              UINT *state, ULONG *run count, UINT *priority,
                              UINT *preemption_threshold, ULONG *time_slice,
                              TX_THREAD **next_thread,
                              TX THREAD **next suspended thread);
                           tx thread performance info get(TX THREAD *thread ptr,
                 UINT
                              ULONG *resumptions, ULONG *suspensions,
                              ULONG *solicited preemptions,
                              ULONG *interrupt_preemptions,
                              ULONG *priority inversions, ULONG *time slices, ULONG
                              *relinquishes, ULONG *timeouts,
                              ULONG *wait aborts, TX THREAD **last preempted by);
                 UINT
                           tx_thread_performance_system_info_get(ULONG *resumptions,
                              ULONG *suspensions,
                              ULONG *solicited_preemptions,
                              ULONG *interrupt_preemptions,
                              ULONG *priority_inversions,ULONG *time_slices, ULONG
                              *relinquishes, ULONG *timeouts,
                              ULONG *wait_aborts, ULONG *non_idle_returns,
                              ULONG *idle returns);
                 UINT
                           tx thread preemption change (TX THREAD *thread ptr,
                              UINT new threshold, UINT *old threshold);
                 HINT
                           tx_thread_priority_change(TX_THREAD *thread_ptr,
                              UINT new priority, UINT *old priority);
                 VOID
                           tx thread relinquish(VOID);
                 UINT
                           tx thread reset(TX THREAD *thread ptr);
                           tx thread resume(TX THREAD *thread ptr);
                 UINT
                           tx thread sleep(ULONG timer ticks);
                 UINT
                 UINT
                           tx thread stack error notify
                              VOID(*stack error handler)(TX THREAD *));
                 UINT
                           tx thread suspend(TX THREAD *thread ptr);
```

```
UINT
                                        tx_thread_terminate(TX THREAD *thread ptr);
                              UINT
                                        tx_thread_time_slice_change(TX_THREAD *thread ptr,
                                           ULONG new time slice, ULONG *old time slice);
                              UINT
                                        tx_thread_wait_abort(TX THREAD *thread ptr);
Time Services
                              ULONG
                                        tx_time_get(VOID);
                                        tx_time_set(ULONG new time);
                              VOID
Timer Services
                              UINT
                                        tx_timer_activate(TX_TIMER *timer_ptr);
                              UINT
                                        tx timer change (TX TIMER *timer ptr,
                                           ULONG initial ticks,
                                           ULONG reschedule_ticks);
                              ULNL
                                        tx_timer_create(TX TIMER *timer ptr,
                                           CHAR *name_ptr,
                                           VOID (*expiration function) (ULONG),
                                           ULONG expiration input, ULONG initial ticks,
                                           ULONG reschedule_ticks, UINT auto_activate);
                              UINT
                                        tx_timer_deactivate(TX_TIMER *timer_ptr);
                              UINT
                                        tx_timer_delete(TX_TIMER *timer_ptr);
                                        tx_timer_info_get(TX_TIMER *timer_ptr, CHAR **name,
                              UINT
                                           UINT *active, ULONG *remaining ticks,
                                           ULONG *reschedule ticks,
                                           TX_TIMER **next_timer);
                              UINT
                                        tx_timer_performance_info_get(TX_TIMER *timer_ptr,
                                           ULONG *activates,
                                           ULONG *reactivates, ULONG *deactivates,
                                           ULONG *expirations,
                                           ULONG *expiration adjusts);
                                        tx_timer_performance_system_info_get
                              UINT
                                           ULONG *activates, ULONG *reactivates,
                                           ULONG *deactivates, ULONG *expirations,
                                           ULONG *expiration adjusts);
```



## ThreadX Constants

- Alphabetic Listings 324
- Listing by Value 326

Alphabetic	TX_1_ULONG	1
Listings	TX_2_ULONG	2
	TX_4_ULONG	4
	TX_8_ULONG	8
	TX_16_ULONG	16
	TX_ACTIVATE_ERROR	0x17
	TX_AND	2
	TX_AND_CLEAR	3
	TX_AUTO_ACTIVATE	1
	TX_AUTO_START	1
	TX_BLOCK_MEMORY	8
	TX_BYTE_MEMORY	9
	TX_CALLER_ERROR	0x13
	TX_CEILING_EXCEEDED	0x21
	TX_COMPLETED	1
	TX_DELETE_ERROR	0x11
	TX_DELETED	0x01
	TX_DONT_START	0
	TX_EVENT_FLAG	7
	TX_FALSE	0
	TX_FEATURE_NOT_ENABLED	0xFF
	TX_FILE	11
	TX_GROUP_ERROR	0x06
	TX_INHERIT	1
	TX_INHERIT_ERROR	0x1F
	TX_INVALID_CEILING	0x22
	TX_IO_DRIVER	10
	TX_LOOP_FOREVER	1
	TX_MUTEX_ERROR	0x1C
	TX_MUTEX_SUSP	13
	TX_NO_ACTIVATE	0

TX_NO_EVENTS	0x07
TX_NO_INHERIT	0
TX_NO_INSTANCE	0x0D
TX_NO_MEMORY	0x10
TX_NO_TIME_SLICE	0
TX_NO_WAIT	0
TX_NOT_AVAILABLE	0x1D
TX_NOT_DONE	0x20
TX_NOT_OWNED	0x1E
TX_NULL	0
TX_OPTION_ERROR	80x0
TX_OR	0
TX_OR_CLEAR	1
TX_POOL_ERROR	0x02
TX_PRIORITY_ERROR	0x0F
TX_PTR_ERROR	0x03
TX_QUEUE_EMPTY	0x0A
TX_QUEUE_ERROR	0x09
TX_QUEUE_FULL	0x0B
TX_QUEUE_SUSP	5
TX_READY	0
TX_RESUME_ERROR	0x12
TX_SEMAPHORE_ERROR	0x0C
TX_SEMAPHORE_SUSP	6
TX_SIZE_ERROR	0x05
TX_SLEEP	4
TX_STACK_FILL	0xEFEFEFEFUL
TX_START_ERROR	0x10
TX_SUCCESS	0x00
TX_SUSPEND_ERROR	0x14
TX_SUSPEND_LIFTED	0x19

TX_SUSPENDED	3
TX_TCP_IP	12
TX_TERMINATED	2
TX_THREAD_ENTRY	0
TX_THREAD_ERROR	0x0E
TX_THREAD_EXIT	1
TX_THRESH_ERROR	0x18
TX_TICK_ERROR	0x16
TX_TIMER_ERROR	0x15
TX_TRUE	1
TX_WAIT_ABORT_ERROR	0x1B
TX_WAIT_ABORTED	0x1A
TX_WAIT_ERROR	0x04
TX_WAIT_FOREVER	0xFFFFFFFUL

## Listing by Value

TX_DONT_START	0
TX_FALSE	0
TX_NO_ACTIVATE	0
TX_NO_INHERIT	0
TX_NO_TIME_SLICE	0
TX_NO_WAIT	0
TX_NULL	0
TX_OR	0
TX_READY	0
TX_SUCCESS	0x00
TX_THREAD_ENTRY	0
TX_1_ULONG	1
TX_AUTO_ACTIVATE	1
TX_AUTO_START	1
TX_COMPLETED	1
TX_INHERIT	1

TX_LOOP_FOREVER	1
TX_DELETED	0x01
TX_OR_CLEAR	1
TX_THREAD_EXIT	1
TX_TRUE	1
TX_2_ULONG	2
TX_AND	2
TX_POOL_ERROR	0x02
TX_TERMINATED	2
TX_AND_CLEAR	3
TX_PTR_ERROR	0x03
TX_SUSPENDED	3
TX_4_ULONG	4
TX_SLEEP	4
TX_WAIT_ERROR	0x04
TX_QUEUE_SUSP	5
TX_SIZE_ERROR	0x05
TX_GROUP_ERROR	0x06
TX_SEMAPHORE_SUSP	6
TX_EVENT_FLAG	7
TX_NO_EVENTS	0x07
TX_8_ULONG	8
TX_BLOCK_MEMORY	8
TX_OPTION_ERROR	80x0
TX_BYTE_MEMORY	9
TX_QUEUE_ERROR	0x09
TX_IO_DRIVER	10
TX_QUEUE_EMPTY	0x0A
TX_FILE	11
TX_QUEUE_FULL	0x0B
TX_TCP_IP	12

TX_SEMAPHORE_ER	ROR 0x0C	
TX_MUTEX_SUSP	13	
TX_NO_INSTANCE	0x0D	
TX_THREAD_ERROR	0x0E	
TX_PRIORITY_ERROR	R 0x0F	
TX_16_ULONG	16	
TX_NO_MEMORY	0x10	
TX_START_ERROR	0x10	
TX_DELETE_ERROR	0x11	
TX_RESUME_ERROR	0x12	
TX_CALLER_ERROR	0x13	
TX_SUSPEND_ERRO	R 0x14	
TX_TIMER_ERROR	0x15	
TX_TICK_ERROR	0x16	
TX_ACTIVATE_ERROR	R 0x17	
TX_THRESH_ERROR	0x18	
TX_SUSPEND_LIFTED	0x19	
TX_WAIT_ABORTED	0x1A	
TX_WAIT_ABORT_ER	ROR 0x1B	
TX_MUTEX_ERROR	0x1C	
TX_NOT_AVAILABLE	0x1D	
TX_NOT_OWNED	0x1E	
TX_INHERIT_ERROR	0x1F	
TX_NOT_DONE	0x20	
TX_CEILING_EXCEED	ED 0x21	
TX_INVALID_CEILING	0x22	
TX_FEATURE_NOT_E	NABLED 0xFF	
TX_STACK_FILL	0xEFEF	FEFEFUL
TX_WAIT_FOREVER	0xFFFF	FFFFUL

# ThreadX Data Types

- TX\_BLOCK\_POOL 330
- TX\_BYTE\_POOL 330
- TX\_EVENT\_FLAGS\_GROUP 331
- TX\_MUTEX 331
- TX\_QUEUE 332
- **■** TX\_SEMAPHORE 333
- TX\_THREAD 333
- TX\_TIMER 335
- **TX\_TIMER\_INTERNAL 336**

```
typedef struct TX BLOCK POOL STRUCT
   ULONG tx block pool id;
   CHAR *tx block pool name;
   ULONG tx block pool available;
   ULONG tx block pool total;
   UCHAR *tx block pool available list;
   UCHAR *tx block pool start;
   ULONG tx block pool size;
   ULONG tx block pool block size;
   struct TX THREAD STRUCT
                       *tx block pool suspension list;
   ULONG tx block pool suspended count;
   struct TX BLOCK POOL STRUCT
                       *tx_block_pool_created_next,
                       *tx block pool created previous;
#ifdef TX BLOCK POOL ENABLE PERFORMANCE INFO
    ULONG tx block pool performance allocate count;
    ULONG tx block pool performance release count;
    ULONG tx block pool performance suspension count;
   ULONG tx block pool performance timeout count;
#endif
   TX BLOCK POOL EXTENSION /* Port defined */
} TX BLOCK POOL;
typedef struct TX BYTE POOL STRUCT
   ULONG tx byte pool id;
   CHAR *tx byte pool name;
   ULONG tx byte pool available;
   ULONG tx byte pool fragments;
   UCHAR *tx byte pool list;
   UCHAR *tx byte_pool_search;
   UCHAR *tx byte pool start;
   ULONG tx byte pool size;
   struct TX_THREAD_STRUCT
                      *tx byte pool owner;
   struct TX THREAD STRUCT
                       *tx byte pool suspension list;
   ULONG
                       tx byte pool suspended count;
   struct TX BYTE POOL STRUCT
                       *tx byte pool created next,
                       *tx byte pool created previous;
#ifdef TX BYTE POOL ENABLE PERFORMANCE INFO
```

```
ULONG tx byte pool performance allocate count;
   ULONG tx byte pool performance release count;
   ULONG tx byte pool performance merge count;
   ULONG tx byte pool performance split count;
   ULONG tx byte pool performance search count;
   ULONG tx byte pool performance suspension count;
   ULONG tx byte pool performance timeout count;
#endif
   TX BYTE POOL EXTENSION /* Port defined */
} TX BYTE POOL;
typedef struct TX EVENT FLAGS GROUP STRUCT
   ULONG tx event flags group id;
   CHAR *tx event flags group name;
   ULONG tx event flags group current;
   UINT tx event flags group reset search;
   struct TX THREAD STRUCT
                       *tx event flags group suspension list;
   ULONG
                       tx event flags group suspended count;
   struct TX EVENT FLAGS_GROUP_STRUCT
                       *tx_event_flags group created next,
                       *tx event flags group created previous;
                       tx event_flags_group_delayed_clear;
   ULONG
#ifdef TX EVENT FLAGS ENABLE PERFORMANCE INFO
   ULONG tx event flags group performance set count;
   ULONG tx event flags group performance get count;
   ULONG tx event flags group performance suspension count;
   ULONG tx event flags group performance timeout count;
#endif
#ifndef TX DISABLE NOTIFY CALLBACKS
   VOID (*tx event flags group set notify) (struct TX EVENT FLAGS GROUP STRUCT
*);
#endif
   TX EVENT FLAGS GROUP EXTENSION /* Port defined */
} TX EVENT FLAGS GROUP;
typedef struct TX MUTEX STRUCT
   ULONG tx mutex_id;
   CHAR *tx mutex name;
   ULONG tx mutex ownership count;
```

```
TX THREAD *tx mutex owner;
    UINT tx mutex inherit;
    UINT tx mutex original priority;
    struct TX THREAD STRUCT
                      *tx mutex suspension list;
    ULONG tx mutex suspended count;
    struct TX MUTEX STRUCT
                      *tx mutex created next,
                      *tx mutex created previous;
    ULONG tx mutex highest priority waiting;
    struct TX MUTEX STRUCT
                      *tx mutex owned next,
                       *tx mutex owned previous;
#ifdef TX MUTEX ENABLE PERFORMANCE INFO
   ULONG tx mutex performance put count;
   ULONG tx mutex performance get count;
   ULONG tx mutex performance suspension count;
   ULONG tx mutex performance timeout count;
    ULONG tx mutex performance priority inversion count;
   ULONG tx mutex performance priority inheritance count;
#endif
    TX MUTEX EXTENSION /* Port defined */
} TX MUTEX;
typedef struct TX QUEUE STRUCT
   ULONG tx queue id;
   CHAR *tx queue name;
   UINT tx queue message size;
   ULONG tx queue capacity;
   ULONG tx queue enqueued;
   ULONG tx queue available storage;
   ULONG *tx queue start;
   ULONG *tx queue end;
   ULONG *tx queue read;
   ULONG *tx queue write;
   struct TX THREAD STRUCT
                       *tx queue suspension list;
   ULONG tx queue suspended count;
    struct TX QUEUE STRUCT
                       *tx queue created next,
                       *tx queue created previous;
#ifdef TX QUEUE ENABLE PERFORMANCE INFO
   ULONG tx queue performance messages sent count;
   ULONG tx queue performance messages received count;
```

```
ULONG tx queue performance empty suspension count;
   ULONG tx queue performance full suspension count;
   ULONG tx queue performance full error count;
   ULONG tx queue performance timeout count;
#endif
#ifndef TX DISABLE NOTIFY CALLBACKS
   VOID *tx queue send notify) (struct TX QUEUE STRUCT *);
#endif
   TX QUEUE EXTENSION /* Port defined */
} TX QUEUE;
typedef struct TX SEMAPHORE STRUCT
   ULONG tx semaphore id;
   CHAR *tx semaphore name;
   ULONG tx semaphore count;
   struct TX THREAD STRUCT
                       *tx semaphore suspension list;
   ULONG tx semaphore suspended count;
    struct TX SEMAPHORE STRUCT
                       *tx semaphore created next,
                       *tx semaphore created previous;
#ifdef TX SEMAPHORE ENABLE PERFORMANCE INFO
   ULONG tx semaphore performance put count;
   ULONG tx semaphore performance get count;
   ULONG tx semaphore performance suspension count;
   ULONG tx semaphore performance timeout count;
#endif
#ifndef TX DISABLE NOTIFY CALLBACKS
   VOID (*tx semaphore put notify) (struct TX SEMAPHORE STRUCT *);
#endif
    TX SEMAPHORE EXTENSION /* Port defined */
} TX SEMAPHORE;
typedef struct TX THREAD STRUCT
   ULONG tx thread id;
   ULONG tx thread run count;
   VOID *tx thread stack ptr;
   VOID *tx thread stack start;
   VOID *tx thread stack end;
```

```
ULONG tx thread stack size;
   ULONG tx thread time slice;
   ULONG tx thread new time slice;
   struct TX THREAD STRUCT
                      *tx thread ready next,
                      *tx thread ready previous;
   TX THREAD EXTENSION 0 /* Port defined */
   CHAR *tx thread name;
   UINT tx thread priority;
   UINT tx thread state;
   UINT tx thread delayed suspend;
   UINT tx thread suspending;
   UINT tx thread preempt threshold;
   VOID (*tx_thread_schedule_hook) (struct TX_THREAD_STRUCT *, ULONG);
   VOID (*tx thread entry) (ULONG);
   ULONG tx thread entry_parameter;
   TX_TIMER_INTERNAL tx_thread_timer;
   VOID (*tx thread suspend cleanup) (struct TX THREAD STRUCT *);
   VOID *tx thread suspend control block;
   struct TX THREAD STRUCT
                      *tx thread suspended next,
                      *tx thread suspended previous;
   ULONG tx thread suspend info;
   VOID *tx thread additional suspend info;
   UINT tx thread suspend option;
   UINT tx thread suspend status;
   TX THREAD EXTENSION 1 /* Port defined */
   struct TX THREAD STRUCT
                      *tx thread created next,
                      *tx thread created previous;
   TX THREAD EXTENSION 2 /* Port defined */
   VOID *tx thread filex ptr;
   UINT tx thread user priority;
   UINT tx thread user preempt threshold;
   UINT tx thread inherit priority;
   ULONG tx thread owned mutex count;
   struct TX MUTEX STRUCT*tx thread owned mutex list;
#ifdef TX THREAD ENABLE PERFORMANCE INFO
   ULONG tx thread performance resume count;
   ULONG tx thread performance suspend count;
   ULONG tx thread performance solicited preemption count;
   ULONG tx thread performance interrupt preemption count;
```

```
ULONG tx thread performance priority inversion count;
   struct TX THREAD STRUCT
                      *tx thread performance last preempting thread;
   ULONG tx thread performance time slice count;
   ULONG tx thread performance relinquish count;
   ULONG tx thread performance timeout count;
   ULONG tx thread performance wait abort count;
#endif
   VOID *tx thread stack highest ptr;
#ifndef TX DISABLE NOTIFY CALLBACKS
   VOID (*tx thread_entry_exit_notify)
                       (struct TX THREAD STRUCT *, UINT);
#endif
   TX THREAD EXTENSION 3 /* Port defined */
   ULONG tx thread suspension sequence;
   TX THREAD USER EXTENSION
} TX THREAD;
typedef struct TX TIMER STRUCT
   ULONG tx timer id;
   CHAR *tx timer name;
   TX TIMER INTERNAL tx timer internal;
   struct TX TIMER STRUCT
                      *tx timer created next,
                      *tx timer created previous;
   TX TIMER EXTENSION /* Port defined */
#ifdef TX TIMER ENABLE PERFORMANCE INFO
   ULONG tx timer performance activate count;
   ULONG tx timer performance reactivate count;
   ULONG tx timer performance deactivate count;
   ULONG tx timer performance expiration count;
   ULONG tx timer performance expiration adjust count;
#endif
```



# **ASCII Character Codes**

→ ASCII Character Codes in HEX 338

# **ASCII Character Codes in HEX**

## most significant nibble

	0_	1_	2_	3_	4_	5_	6_	7_
_0	NUL	DLE	SP	0	@	Р	•	р
_1	SOH	DC1	!	1	Α	Q	а	q
_2	STX	DC2	"	2	В	R	b	r
_3	ETX	DC3	#	3	С	S	С	s
_4	EOT	DC4	\$	4	D	Т	d	t
9 <sub>2</sub> _5	ENQ	NAK	%	5	Е	U	е	u
9 T	ACK	SYN	&	6	F	V	f	٧
_7_ <u>_</u> 7	BEL	ETB	1	7	G	W	g	w
ignit 8	BS	CAN	(	8	Н	Х	h	х
least significant nibble	HT	EM	)	9	I	Υ	i	У
<sup>ၜို</sup> _A	LF	SUB	*	:	J	Z	j	z
_B	VT	ESC	+	;	K	[	K	}
_c	FF	FS	,	<	L	١	I	1
_D	CR	GS	-	=	М	]	m	}
_E	SO	RS		>	N	٨	n	~
_F	SI	US	1	?	0	_	0	DEL

## **Symbols**

\_application\_ISR\_entry 100
\_tx\_thread\_context\_restore 100, 293
\_tx\_thread\_context\_save 100, 293
\_tx\_thread\_stack\_error\_handler 62

## Α

abort suspension of specified thread 266 accelerated development benefit of ThreadX 24 activate an application timer 272 activations number of 95 total number of 95 adding assign/release facilities in the device driver 291 advanced driver issue 297 alleviating some buffer allocation processing 303 allocate bytes of memory 126 allocate fixed-size block of memory 108 allocation algorithm 90 allocation of processing 21 allocation suspensions high number of 88, 92 number of 88, 91 total number of 88, 91 allocation timeouts number of 88, 91 total number of 88, 91 allocations

number of 91

total number of 91

ANSIC 16 application define 306 application definition function 50 application downloaded to target 28 application entry point 48 application linked 28 application located on host 28 application notification registration 70 application output request 299 application resources 73, 79 application run-time behavior 63 application specific modifications 17 application timer control block 95 application timers 29, 46, 93, 94 application-specific modifications 17 application-specific processing 54 architecture non-layering picokernel 16 ASCII character codes in HEX 338 assembly language 16 asynchronous events 96

#### В

Background Debug Mode (BDM) 28
basic service call error checking
disable 35
basic thread suspension 53
BDM (Background Debug Mode) 28
binary semaphores 73, 78
black-box problem elimination 17
block memory services 318
block size 86

Block TX_MUTEX 81	configuration options 33
Block TX_THREAD 57	fastest execution 34
blocks allocated	smallest code size 34
number of 88	constant 46
total number of 88	constant area 46
blocks released	context of last execution 59
number of 88	context switch overhead 64
total number of 88	context switches 22, 64, 65
buffer I/O management 300	context switching and polling 23
buffered device drivers 301	control-loop based applications 24
buffered driver responsibilities 301	corrupt memory 62
buffered I/O advantage 301	counting semaphore
buffered output 292	delete 208
buffering messages 69	get instance from 210
byte memory area 297	get performance information 214
byte memory services 318	get system performance
	information 216
C	notify application when put 222
C library 16	place instance in 220 place instance with ceiling 204
C main function 31	prioritize suspension list 218
C pointers 86, 90	retrieve information about 212
C source code 16	counting semaphores 72, 73, 76, 79, 293
change an application timer 274	create a memory pool of bytes 130
change priority of an application	create a message queue 180
thread 248	create an application thread 224
changes time-slice of application	create an application timer 276
thread 264	create an event flags group 144
changing the baud rate of a serial	create mutual exclusion mutex 164
device 291	create pool of fixed-size memory
circular buffer input 297	blocks 112
circular buffers 297, 299	creating application timers 94
circular byte buffers 297	creating counting semaphores 74
circular output buffer 299	creating event flags groups 83
clock tick 31	creating memory block pools 86
	creating memory byte pools 89
compiled application 28	creating message queues 68
compiler tool 46	creating mutexes 79



critical sections 73, 79 locator 46 development tool initialization 48, 49 current device status 292 development tools 46 current thread point 309 device drivers 297 currently executing thread 59 device error counts 292 Customer Support Center 12 device interrupt frequency 303 D device interrupts 297, 303 disable ThreadX timer logic 38 data buffering 296, 297 disabling 0xEF value in byte of thread stack deactivate an application timer 278 defining 36 deactivations disabling basic service call error number of 95 checking 35 total number of 95 disabling notify callbacks for ThreadX deadlock 76, 81 objects 35 deadlock condition 76 disabling the preemption-threshold feature deadly embrace 76, 81 defining 36 debugger 28 distribution file 311 debugger communication 28 demo.threadx.c 311 debugging multithreaded applications 66 dividing the application 24 debugging pitfalls 66 division of application into threads 24 de-fragmentation **DMA 297** definition of 89 does not minimize interrupt lockout time 38 delete a message queue 182 driver access 290, 291 delete an application timer 280 driver control 290, 291 delete counting semaphore 208 driver example 292, 293 delete memory block pool 114 driver functions 290 delete mutual exclusion mutex 166 driver initialization 290, 291 demo threadx.c 30, 306, 311 driver input 290, 291 demo.threadx.c 306 driver input interface 303 demonstration application 33 driver interrupts 290, 292 demonstration system 306 driver output 290, 292 deterministic 85 driver status 290, 292 deterministic real-time behavior 92 driver termination 290, 292 deterministic response times 22 dynamic memory 46, 48 development tool dynamic memory usage 48 compiler 46 linker 46

E	notify application when set 160
ease of use	retrieve information about group 152
ThreadX 24	retrieve performance system information 156
elimination of internal system timer thread	set flags in group 158
defining 39	event flags get suspensions
embedded applications 20	number of 84
allocation of processor between	total number of 84
tasks 21	event flags get timeouts
definition 20	number of 84
definition of 20	total number of 84
multitasking 21	event flags gets
embraces avoided 77	number of 84
empty messages in a message queue 184	total number of 84
EN 50128 19	event flags group
enable and disable interrupts 162	create 144
enable the event gathering code for	event flags group control block 85
creating a TraceX trace buffer 36	event flags groups 31
enabling performance gathering	event flags set notification 83
information on mutexes 38	event flags sets
enabling performance information	number of 84
gathering on block pools 35	total number of 84
enabling performance information	event notification 73, 78
gathering on byte pools 35	event_flags_0 310
enabling performance information	event-chaining 70
gathering on event flags groups 37	advantages of 71, 75, 84
enabling performance information	example of suspended threads 77
gathering on queues 38	example system 31
enabling performance information	excessive timers 96
gathering on timers 39	exchanging a free buffer for an input
entry function 318	buffer 303
entry point 51	executing state 52, 53
entry point of the thread 308	execution
entry point of thread 308	initialization 45
event flag services 319	interrupt service routines (ISR) 44
event flags 50, 53, 82	execution context 60
get event flags from group 148	execution overview 44
get performance information 154	expiration adjustments



number of 95 G total number of 95 gathering of performance information on expirations semaphores 39 number of 95 get a message from message queue 196 total number of 95 get block pool performance external events 64 information 118 F get block pool system performance information 120 fast memory 48 get byte pool performance information 136 faster time to market get byte pool system performance benefit of ThreadX 24 information 138 FIFO order 69, 74, 79, 87, 91 get event flags from event flags group 148 first unused memory 32 get event flags group performance first-available RAM 50 information 154 first-fit memory allocation 89 get instance from counting semaphore 210 first-in-first-out (FIFO) 55 get mutex performance information 172 fixed-size block of memory get mutex system performance allocation of 108 information 174 fixed-size blocks 86 get queue performance information 190 fixed-size memory 85 get queue system performance fixed-size memory blocks information 192 create pool of 112 get semaphore performance fixed-sized messages 68 information 214 fragmentation 85 get semaphore system performance definition of 89 information 216 fragmented pool 90 get thread performance information 238 fragments created get thread system performance number of 91 information 242 total number of 91 get timer performance information 284 fragments merged get timer system performance number of 91 total number of 91 information 286 fragments searched getting started 27 number of 91 global data structures 28 total number of 91 global variables 47 function call nesting 60 globals 63 function calls 59

Н	initialization process 48
hardware devices 290	initialized data 46, 47
hardware interrupt 46	input and output notifications 293
hardware interrupts 292	input buffer 297, 298
heterogeneous 54	input buffer list 301
hidden system thread 96	input byte requests 298
high throughput I/O 301	input bytes 292
highest priority thread 308	input characters 297
high-frequency interrupts 100	input semaphore 294
host computers 28	input-output lists 302
host considerations 28	installation
	troubleshooting 33
1	installation of ThreadX 30
I/O buffer 300	instruction 46
I/O buffering 297	instruction area 46
I/O drivers 290	instruction image of ThreadX 16
ICE (In-Circuit Emulation) 28	International Electrotechnical Commission
idle system returns	(IEC) 61508 and IEC 62304 18
low number of 66	International Electrotechnical Commission (IEC) 62304 18
number of 66	interrupt control 97, 319
IEC 60335-1 19	enable and disable 162
IEC 60730 Annex H 19	interrupt frequency 303
IEC 61508 18	interrupt latency 100
IEC 62304 18	interrupt management 303
IEC/UL 60730-1 19	interrupt preemptions
IEEE 1149.1 28	number of 65, 66
improve the tx_thread_resume and	interrupt service routines 44, 45
tx_thread_suspend API calls 37	interrupt vector handlers 293
improved responsiveness	interrupting 56
ThreadX benefit 22	interrupts 44, 50, 96
In-Circuit Emulation (ICE) 28	invalid pointer 63
increased throughput 23	ISO 26262 18
in-house kernels 17	ISR
initial condition of a mutex 79	handling transmit complete interrupt 295
initial execution 307	ISR template 99
initialization 44, 45, 48	ISRs 44



memory cannot be called from 89	retrieve information about 116 memory block pool control block 88
J	memory block pools 85
JTAG 28	memory block size 86
31AG 20	memory byte pool 89, 92
L	allocate 126
large local data 62	create 130
linker tool 46	get performance information 136 get system performance
linking multiple packets 300	information 138
Linux 28	prioritize suspension list 140
Linux development platform 30	release bytes to pool 142
local storage 58	memory byte pool control block 92
local variable allocation 60	memory pitfalls 62
local variables 59	memory pools 31, 48, 50
locator tool 46	memory usage 46
locking out interrupts 299	merging of adjacent memory blocks 89
logic for circular input buffer 298	message destination pitfall 72
logic for circular output buffer 299	message queue 67
logical AND/OR operation 82	create 180
•	delete 182
lower-priority threads	empty messages from 184
not suspending 66 low-level initialization 49	get message from queue 196
iow-iever irritalization 43	get queue performance information 190
М	get system performance information 192
main 32, 49, 51	notify application when message is sent
main function 49	to queue 202 prioritize suspension list 194
malloc calls 89	retrieve information about 188
memory 53	send message to front of queue 186
memory areas 46	send message to queue 200
memory block in cache 86	message queue capacity 68
memory block pool 85	message size 68
delete 114	messages received
get performance information about 118	total number of 71
get system performance for 120	messages sent
prioritize suspension list 122	total number of 71
release fixed size block 124	microkernel vs. picokernel architecture 16

minimum stack size 60	total number of 80
defining 38	mutex puts
MISRA C Compliant 19	number of 80
MISRA-C	total number of 80
2004 19	mutex services 319
2012 19	mutex_0 310
misuse of thread priorities 63	mutexes 31, 50, 53, 57, 64, 78, 79
multiple buffers 300	mutual exclusion 73, 76, 78, 81
multiple synchronization events 70	my_thread_entry 32
multitasking 21	
multithreaded 52	N
multithreaded environment 23	nondeterministic behavior 85, 92
multithreading 63, 64, 67	nondeterministic priority inversion 82
mutex	non-idle system returns
create 164	number of 66
delete 166	non-reentrant 63
get information about 170	notify application upon thread entry and
get ownership of 168	exit 230
get performance information 172	notify application when event flags are
get system performance information 174	set 160
prioritize suspension list 176	notify application when message is sent to
release ownership of 178	queue 202
mutex get suspensions	notify application when semaphore is
number of 80	put 222
total number of 80	number of threads 57
mutex get timeouts	
high number of 80	0
number of 80	observing the demonstration 310
total number of 80	obtain ownership of mutex 168
mutex gets	OCD 28
number of 80 total number of 80	
mutex mutual exclusion 79	OCD (on chip debug) 28
	on-chip debug 28
mutex priority inheritances	one-shot timer 93
number of 80 total number of 80	optimized driver ISRs 297
mutex priority inversions	optimizing applications 71
number of 80	order of thread execution 307
HUHIDEL OF OU	



output buffer 299	preemption 55, 56
output buffer list 301	preemption-threshold 56, 57, 64, 65, 78
output bytes 292	changing during run-time 57
output semaphore 293	too low 66
overhead 90	preemptive scheduling 22
associated with multithreaded	priorities
kernels 23	thread control block field 59
reduction due to multithreading 23	prioritize block pool suspension list 122
overhead impact of multithreaded	prioritize byte pool suspension list 140
environments 23	prioritize mutex suspension list 176
overview 306	prioritize queue suspension list 194
ThreadX 16	prioritize semaphore suspension list 218
overwriting memory blocks 89, 93	priority 54
ownership count 79	priority ceiling 56
P	priority inheritance 57, 64, 81
P	priority inversion 56, 63, 78, 81
packet I/O 297	priority inversions
performance of embedded	number of 66
microprocessors 300	priority levels for ThreadX
periodic interrupt 29	defining 37
periodic timers 93	priority of internal ThreadX timer thread
periodics 46	defining 40
physical memory 48	priority overhead 64
picokernel 16	priority zero 96
picokernel architecture 16	priority-based scheduling 22
pitfall 78, 81	process
place an instance in counting	definition of 21
semaphore 220	process oriented operating system 21
place an instance in counting semaphore	processing bandwidth 63, 100
with ceiling 204	processing time allocation prior to real-time
polling	kernels 22
definition of 292	processor allocation 24
polling as work around to control loop	processor allocation logic 24
response time 23	processor isolation 24
pool capacity 86, 90	processor reset 44
pool memory area 87, 90	processor-independent interface provided
portability of ThreadX 16, 25	by ThreadX 24

producer-consumer 73 defining 38 reactivations (periodic timers) product distribution 29 number of 95 program execution total number of 95 types of 44 read and write pointers 298 protecting the software investment read pointer 298 ThreadX guarantees migration path 25 readme\_threadx.txt 28, 29, 32, 33, 34, 99 public resource 68, 73, 78, 93 ready state 52, 53 memory blocks 86 ready thread 44 memory byte pool 89 real-time 85 Q definition of 20 real-time software queue control 72 definition of 20 queue empty suspensions real-time systems 44, 56 total number of 71 device drivers embedded in 290 queue event-chaining 70 re-creating thread 53 queue full error returns recursive algorithms 62 total number of 71 redundant polling 23 queue full suspensions 71 reentrancy of threads 62 total number of 71 queue memory area 69 reentrant 62 reentrant function 62 queue messages 53 register thread stack error notification queue performance information 71 queue send notification 70 callback 258 relative time 96 queue services 320 release a fixed-size block of memory 124 queue timeouts total number of 71 release bytes back to memory pool 142 queue 0 308 release ownership of mutex 178 queues 31, 48, 50 releases number of 91 R total number of 91 Relinguish control to other application RAM threads 250 first available 50 removing logic for initializing ThreadX initialized data area 47 global C data structures 36 placing stack in 60 reset 48, 50 queue memory area in 69 requirements 28 reset thread 252

responsive processing 57



reactivation of ThreadX timers in-line

re-starting thread 53	run-time semaphore performance 75
resume suspended application thread 254	run-time stack checking 37, 62
retrieve information about an application	run-time statistics 292
timer 282	run-time status 292
retrieve information about block pool 116	run-time thread performance 65
retrieve information about event flags	
group 152	S
retrieve information about mutex 170	Safety Certifications 18
retrieve information about queue 188	ThreadX Certification Pack 20
retrieve information about semaphore 212	UL Certification 19
retrieve information about thread 234	scalability 16
retrieve performance system information	scaling among micro-controller-based
about event flags group 156	applications 16
retrieves current time	scheduling 50
time	scheduling loop 59
retrieve 268	scheduling threads 44
retrieves pointer to currently executing	seeking a new sector on a disk 291
thread 232	semaphore control block 76, 81
ROM	semaphore event-chaining 75
instruction area location 46	semaphore get suspensions
location of instruction area 47 ROM requirements for target 28	number of 75
round-robin scheduling 55	total number of 75
RTOS standard 18	semaphore get timeouts
run-time	high number of 76
preemption-threshold changing	number of 75
during 57	total number of 75 semaphore gets
run-time application timer performance 95	number of 75
run-time behavior 24, 63	total number of 75
run-time block pool performance 87	semaphore put notification 74
run-time byte pool performance 91	semaphore puts
run-time configuration 92	number of 75
run-time control. 291	total number of 75
run-time event flags performance 84	semaphore services 320
run-time image 16	semaphore_0 309
run-time mutex performance 80	semaphores 31, 50, 53, 78
run-time queue performance 71	semi-independent program segment 50

send a message to message queue 200	of threads 63
send message to the front of queue 186	starving threads 63
service call preemptions 66	static memory 46
number of 65, 66	static memory usage 46
service call time-outs 29	static variables 47
set event flags in an event flag group 158	statics 63
sets the current time 270	suspend an application thread 260
setting both the read and write buffer	suspended current thread for specified
pointers to beginning address of	time 256
buffer 297	suspended state 52, 53
setting the output semaphore 295	suspension 98
simple 296	suspension aborts
simple driver initialization 293, 294	number of 66
simple driver input 294	system reset 48, 51
simple driver output 295, 296	system stack 28, 46, 47
simple driver shortcomings 296	system throughput
simplifying development with threads 24	impact on 23
size and location of I/O buffers 300	_
size of ThreadX 16	Т
size of ThreadX 16 slow memory 48	tailoring kernel with assembly language 16
slow memory 48	tailoring kernel with assembly language 16
slow memory 48 software maintenance 23	tailoring kernel with assembly language 16 target address space of 69 interrupt source requirements 29
slow memory 48 software maintenance 23 stack 44	tailoring kernel with assembly language 16 target address space of 69 interrupt source requirements 29 ROM requirements 28
slow memory 48 software maintenance 23 stack 44 stack areas preset with data pattern prior to creating threads 61	tailoring kernel with assembly language 16 target address space of 69 interrupt source requirements 29 ROM requirements 28 target address space 87
slow memory 48 software maintenance 23 stack 44 stack areas preset with data pattern prior to creating threads 61 stack corruption 62	tailoring kernel with assembly language 16 target address space of 69 interrupt source requirements 29 ROM requirements 28 target address space 87 target considerations 28
slow memory 48 software maintenance 23 stack 44 stack areas preset with data pattern prior to creating threads 61 stack corruption 62 stack error handler 37	tailoring kernel with assembly language 16 target address space of 69 interrupt source requirements 29 ROM requirements 28 target address space 87 target considerations 28 target download 28
slow memory 48 software maintenance 23 stack 44 stack areas preset with data pattern prior to creating threads 61 stack corruption 62	tailoring kernel with assembly language 16 target address space of 69 interrupt source requirements 29 ROM requirements 28 target address space 87 target considerations 28 target download 28 target's address space 60, 90
slow memory 48 software maintenance 23 stack 44 stack areas preset with data pattern prior to creating threads 61 stack corruption 62 stack error handler 37	tailoring kernel with assembly language 16 target  address space of 69 interrupt source requirements 29 ROM requirements 28 target address space 87 target considerations 28 target download 28 target's address space 60, 90 task
slow memory 48 software maintenance 23 stack 44 stack areas preset with data pattern prior to creating threads 61 stack corruption 62 stack error handler 37 stack error handling routine 62	tailoring kernel with assembly language 16 target  address space of 69 interrupt source requirements 29 ROM requirements 28 target address space 87 target considerations 28 target download 28 target's address space 60, 90 task definition of 21
slow memory 48 software maintenance 23 stack 44 stack areas preset with data pattern prior to creating threads 61 stack corruption 62 stack error handler 37 stack error handling routine 62 stack memory area 61	tailoring kernel with assembly language 16 target address space of 69 interrupt source requirements 29 ROM requirements 28 target address space 87 target considerations 28 target download 28 target's address space 60, 90 task definition of 21 ThreadX does not use term 22
slow memory 48 software maintenance 23 stack 44 stack areas preset with data pattern prior to creating threads 61 stack corruption 62 stack error handler 37 stack error handling routine 62 stack memory area 61 stack pointer 59	tailoring kernel with assembly language 16 target address space of 69 interrupt source requirements 29 ROM requirements 28 target address space 87 target considerations 28 target download 28 target's address space 60, 90 task definition of 21 ThreadX does not use term 22 tasks vs. threads 21
slow memory 48 software maintenance 23 stack 44 stack areas preset with data pattern prior to creating threads 61 stack corruption 62 stack error handler 37 stack error handling routine 62 stack memory area 61 stack pointer 59 stack preset 61	tailoring kernel with assembly language 16 target  address space of 69 interrupt source requirements 29 ROM requirements 28 target address space 87 target considerations 28 target download 28 target's address space 60, 90 task  definition of 21 ThreadX does not use term 22 tasks vs. threads 21 terminated state 52, 53
slow memory 48 software maintenance 23 stack 44 stack areas preset with data pattern prior to creating threads 61 stack corruption 62 stack error handler 37 stack error handling routine 62 stack memory area 61 stack pointer 59 stack preset 61 stack size 67, 306	tailoring kernel with assembly language 16 target address space of 69 interrupt source requirements 29 ROM requirements 28 target address space 87 target considerations 28 target download 28 target's address space 60, 90 task definition of 21 ThreadX does not use term 22 tasks vs. threads 21 terminated state 52, 53 terminates an application thread 262
slow memory 48 software maintenance 23 stack 44 stack areas preset with data pattern prior to creating threads 61 stack corruption 62 stack error handler 37 stack error handling routine 62 stack memory area 61 stack pointer 59 stack preset 61 stack size 67, 306 stack size of internal ThreadX timer thread	tailoring kernel with assembly language 16 target  address space of 69 interrupt source requirements 29 ROM requirements 28 target address space 87 target considerations 28 target download 28 target's address space 60, 90 task  definition of 21 ThreadX does not use term 22 tasks vs. threads 21 terminated state 52, 53 terminates an application thread 262 Thread 309
slow memory 48 software maintenance 23 stack 44 stack areas preset with data pattern prior to creating threads 61 stack corruption 62 stack error handler 37 stack error handling routine 62 stack memory area 61 stack pointer 59 stack preset 61 stack size 67, 306 stack size of internal ThreadX timer thread defining 40	tailoring kernel with assembly language 16 target address space of 69 interrupt source requirements 29 ROM requirements 28 target address space 87 target considerations 28 target download 28 target's address space 60, 90 task definition of 21 ThreadX does not use term 22 tasks vs. threads 21 terminated state 52, 53 terminates an application thread 262



change priority of 248	thread execution states 52
changes time slice of 264	thread identity 309
control block of 57	thread model 22
create 224	thread preemption 53
critical sections 56	thread priorities 54, 63
definition of 21	thread priority pitfalls 63
get performance information 238	thread relinquishes
get system performance 242 highest priority 308	•
notify application when entering and	number of 66
exiting 230	thread resumptions
register stack error notification 258	number of 65
relinquish control to other threads 250	thread scheduling 55
reset 252	thread scheduling loops 44, 49
resume suspended 254	thread stack area 59
retrieve information about 234	thread stack sizes 61
retrieves pointer to executing thread 232	thread starvation 63
stack area 60	thread state transition 52
stack for saving context of execution 59 stack of 58, 59	thread states 52
suspend 260	thread suspension 69, 74, 83, 87, 90, 303
suspend for specified time 256	thread suspensions
term that replaces task 22	number of 65
terminate 262	thread timeouts
thread 0 308	number of 66
thread 1 308	Thread_0 308
thread 2 308	thread_0 308, 310
Thread 3 309	thread_0_entry 308
Thread 4 309	Thread_1 308
thread 5 309	thread_1_counter 311
thread 6 310	thread_1_entry 308
thread 7 310	thread_2 308
thread control 57	thread_2_counter 311
thread control block fields 59	thread_2_entry 308
thread control services 321	thread_3 309
thread counters 310	thread_3_and_4_entry 309
thread creation 57	thread_4 309
Thread Entry/Exit Notification 54	thread_5 308, 309, 310
thread execution 44, 50, 309	thread_5_entry 309
,,	

thread_6 310	set 270
thread_6_and_7_entry 310	suspension for 53
thread 7 310	time services 322
threads 31, 50, 54, 57	time slicing 55
number of 57	service call function 29
simplifying development with 24	time-outs 46, 69
threads 3 and 4 309	service call 29
ThreadX	timer
block memory pool 300	activate 272
constants 323	change 274
data types 11	create 276
demo application 33	deactivate 278
deployed in two-billion devices 18	delete 280
distribution contents 29	get performance information 284
ease of use 24	get system performance
initialization 306	information 286
installation 30	retrieve information about 282
instruction image of 16	timer accuracy 94
managed interrupts 97	timer execution 94
overview 16	timer intervals 93
portability 16	timer related functions 29
portability of 25	timer services 94, 322
primary purpose of 21	timer setup 93
processor-independent interface 24	timer ticks 55, 93, 94, 96
RTOS standard for deeply embedded applications 18	timers 50
services 101	time-slice 55, 59
size of 16	number of 66
supported processors 306	time-slices
synchronization primitive 54	number of 66
using 31	time-slicing 94
ThreadX benefit 22	· ·
accelerated development 24	transmitting and receiving data with buffers 300
faster time to market 24	
improve time-to-market 24	transmitting or receiving individual packets
improved responsiveness 22	of data 300
ThreadX_Express_Startup.pdf 29	troubleshooting 33
throughput reduction 23	installation 33
tick counter 96	tips 33
time	where to send information 33
	TÜV Certification 18



TX AND CLEAR 82 tx api.h 30, 31, 32, 57, 72, 76, 81, 85, 88, 92, 95 tx\_application\_define 31, 32, 49, 50, 51, 291, 293, 306, 307 TX\_AUTO\_START 307 tx block allocate 97, 108 TX BLOCK MEMORY (0x08) 58 TX BLOCK POOL 88, 330 tx block pool create 112, 122 tx block pool delete 114 TX\_BLOCK\_POOL\_ENABLE\_PERFORM ANCE INFO 35, 87 tx block pool info get 97, 116 tx\_block\_pool\_performance\_info\_get 88, 97, 118 tx block pool performance system info get 88, 97, 120 tx\_block\_pool\_prioritize 87, 97, 122 tx block release 97, 124 tx byte allocate 126, 134 TX BYTE MEMORY (0x09) 58 TX BYTE POOL 92, 330, 331 tx byte pool create 130, 140 tx\_byte\_pool\_delete 132 TX BYTE POOL ENABLE PERFORMA NCE INFO 91 tx byte pool info get 97 tx byte pool performance info get 92, 97, 136 tx\_byte\_pool\_performance\_system\_info\_g et 92, 97, 138 tx\_byte\_pool\_prioritize 91, 97, 140 tx byte release 142 TX COMPLETED (0x01) 58

TX DISABLE ERROR CHECKING 35,101 TX\_DISABLE\_NOTIFY\_CALLBACKS 35 TX DISABLE PREEMPTION THRESHOLD 36 TX\_DISABLE\_REDUNDANT\_CLEARING 36 TX\_DISABLE\_STACK\_FILLING 36 TX\_ENABLE\_EVENT\_TRACE 36 TX ENABLE STACK CHECKING 37, 62 TX\_EVENT\_FLAG (0x07) 58 tx\_event\_flags\_create 144, 152 tx event flags delete 146 TX EVENT FLAGS ENABLE PERFOR MANCE INFO 37, 84 tx\_event\_flags\_get 82, 98, 148 TX EVENT FLAGS GROUP 85, 331 tx\_event\_flags\_info\_get 98, 152 tx event flags performance 154 tx event flags performance info get 85, 98 tx event flags performance system info get 85, 98, 156 tx\_event\_flags\_set 82, 98, 158 tx event flags set notify 83, 98, 160 tx ill assembly file 93 TX\_INCLUDE\_USER\_DEFINE\_FILE 34 tx initialize low level 29 TX INLINE THREAD RESUME SUSPE ND 37 tx interrupt control 97, 98, 162 TX IO BUFFER 300 tx kernel enter 31, 32, 49, 51 TX MAX PRIORITIES 37 TX MINIMUM STACK 38, 60 TX\_MISRA\_ENABLE 38 TX MUTEX 331, 332

tx\_mutex\_create 164 tx\_mutex\_delete 166 TX\_MUTEX\_ENABLE NEO 38 80

TX\_MUTEX\_ENABLE\_PERFORMANCE\_I NFO 38, 80

tx\_mutex\_get 78, 168 tx\_mutex\_info\_get 170

tx\_mutex\_performance\_info\_get 80, 98, 172

tx\_mutex\_performance\_system\_info\_get 80, 98, 174

tx\_mutex\_prioritize 79, 176

tx\_mutex\_put 78, 178

TX\_MUTEX\_SUSP (0x0D) 58

tx\_next\_buffer 301 tx\_next\_packet 300 TX NO TIMER 38

TX\_NOT\_INTERRUPTABLE 38

TX OR CONSUME 82

tx\_port.h 11, 30, 38

TX QUEUE 72, 332, 333

tx\_queue\_create 180

tx\_queue\_delete 182

TX\_QUEUE\_ENABLE\_PERFORMANCE\_ INFO 38, 71

tx\_queue\_flush 184

tx\_queue\_front\_send 98, 186

tx\_queue\_info\_get 98, 188

tx\_queue\_performance\_info\_get 71, 98,

tx\_queue\_performance\_system\_info\_get 71, 98, 192

tx\_queue\_prioritize 69, 98, 194

tx\_queue\_receive 67, 98, 196

tx\_queue\_send 65, 67, 98, 200

tx\_queue\_send\_notify 70, 98, 202

TX\_QUEUE\_SUSP (0x05) 58

TX REACTIVATE INLINE 38

TX\_READY (0x00) 58

tx sdriver initialize 293

tx\_sdriver\_input 294

tx sdriver output 296

TX SEMAPHORE 76, 333

tx\_semaphore\_ceiling\_put 73, 98, 204

tx\_semaphore\_create 206

tx semaphore delete 208

TX\_SEMAPHORE\_ENABLE\_PERFORMA
NCE INFO 39, 75

tx\_semaphore\_get 70, 72, 98, 210

tx\_semaphore\_info\_get 98, 212

tx\_semaphore\_performance\_info\_get 76, 98, 214

tx\_semaphore\_performance\_system\_info\_ get 76, 98, 216

tx\_semaphore\_prioritize 74, 98, 218

tx\_semaphore\_put 70, 72, 98, 220

tx\_semaphore\_put\_notify 74, 98, 222

TX SEMAPHORE SUSP (0x06) 58

TX\_SLEEP (0x04) 58

TX SUSPENDED (0x03) 58

TX\_TERMINATED (0x02) 58

TX\_THREAD 48, 333, 335

tx\_thread\_create 32, 50, 224, 234

tx thread current ptr 59, 67

tx thread delete 228, 266

TX\_THREAD\_ENABLE\_PERFORMANCE \_INFO 39,65

tx\_thread\_entry\_exit\_notify 54, 98, 230

 $tx\_thread\_identify \ 59, 98, 232$ 

tx\_thread\_info\_get 98, 234

tx\_thread\_performance\_info\_get 66, 98, 238

tx thread performance system info get 66, 98, 242 tx thread preemption change 246 tx thread priority change 248 tx\_thread\_relinquish 55, 250 tx thread reset 252 tx thread resume 98, 254 tx thread run count 58 tx\_thread\_sleep 32, 256 tx thread stack error notify 37, 62, 98, 258 tx thread state 58 tx thread suspend 260 tx thread terminate 53, 262 tx thread time slice change 264 tx thread wait abort 98, 266 tx time get 96, 98, 268 tx time se 96 tx time set 96, 98, 270 TX TIMER 95, 335, 336 tx timer activate 98, 272, 282 tx timer change 98, 274 tx\_timer\_create 276 tx timer deactivate 98, 278 tx timer delete 280 TX\_TIMER\_ENABLE\_PERFORMANCE\_I NFO 39, 95 tx\_timer\_info\_get 98, 282 TX TIMER INTERNAL 336 tx timer performance info get 95, 98, 284 tx timer performance system info get 9 5, 98, 286 TX TIMER PROCESS IN ISR 39 TX TIMER THREAD PRIORITY 40 TX\_TIMER\_THREAD\_STACK\_SIZE 40

tx\_user.h 33, 34
tx.a 30, 31
tx.lib 30, 31
types of program execution 44
typical thread stack 60

## U

**UART 297** 

UL 1998 20
UL/IEC 60335 20
UL/IEC 60730 20
un-deterministic priority inversion 57, 64
uninitialized data 46, 47
Unix 28
Unix development platform 30
unnecessary processing due to extra
poling 23
unpredictable behavior 50
user-supplied main function 49
using a semaphore to control driver
access 291
using ThreadX 31

### W

watchdog services 46 Windows 28 write pointer 297, 298

# T H R E A D